

Dunning I Light Mini-Pendant

6113301- I.I

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

This product may be dimmed with a standard incandescent dimmer.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

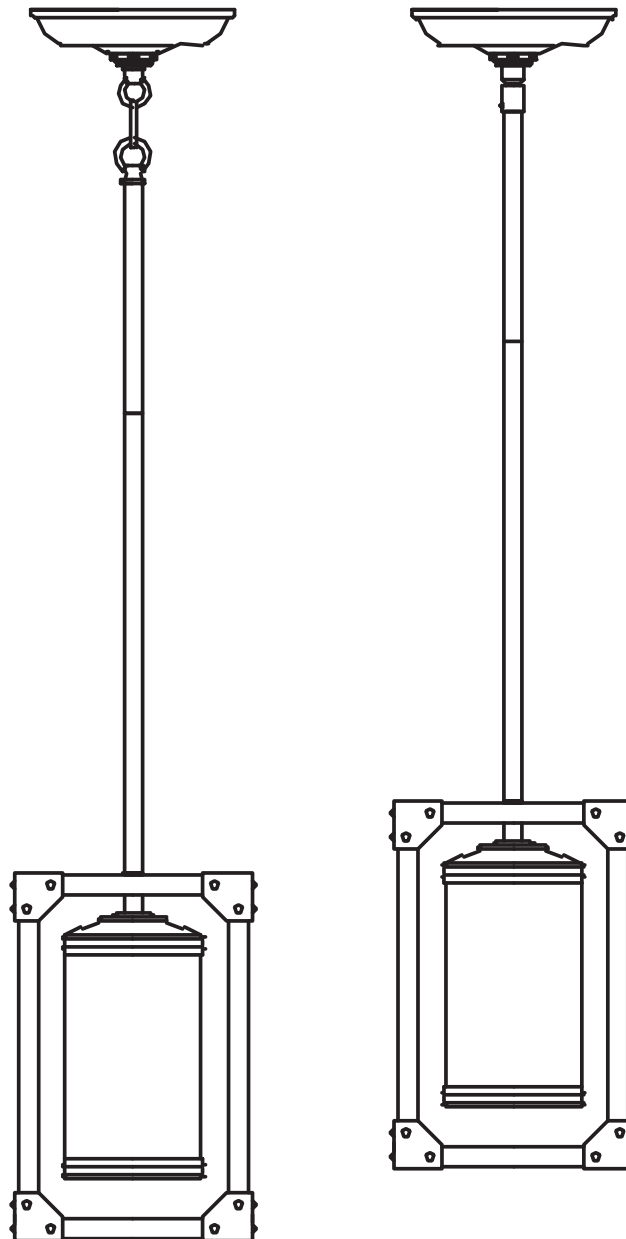

Install the Fixture

1A

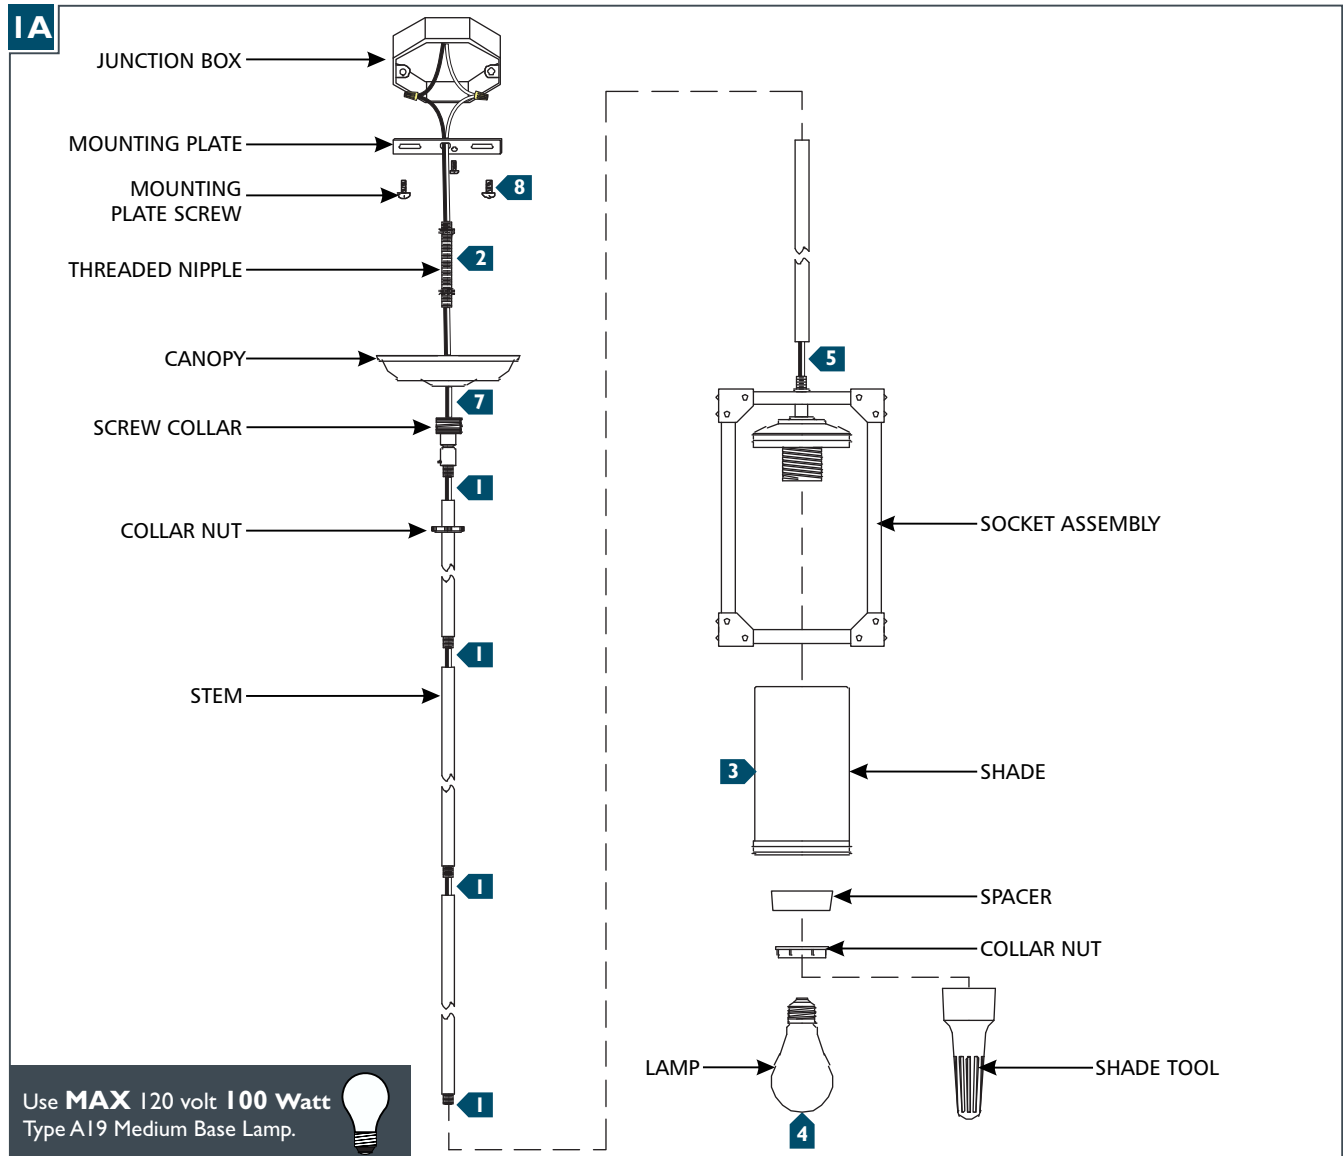

- 1** Determine the wanted height or look of the fixture with the provided stems and/or chain and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 2** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 3** Place the shade and spacer onto the socket and secure them in place by screwing the shade collar nut onto the socket using the shade tool.
- 4** Screw the lamp into the socket.
- 5** Feed the fixture wires through the stems/chain and screw the stem assembly to the socket assembly.
- 6** Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
- 7** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
- 8** Align the mounting plate to the junction box and secure the fixture tightly with two mounting plate screws.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.