




## HETTINGER 6 &amp; 9 LIGHT CHANDELIERS

3139106; 3139109

## General Product Information

Please visit [www.visualcomfort.com](http://www.visualcomfort.com) for product specs.

Product Warranty



FCC Statement

## Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



PLIERS

## Safety Information

## CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



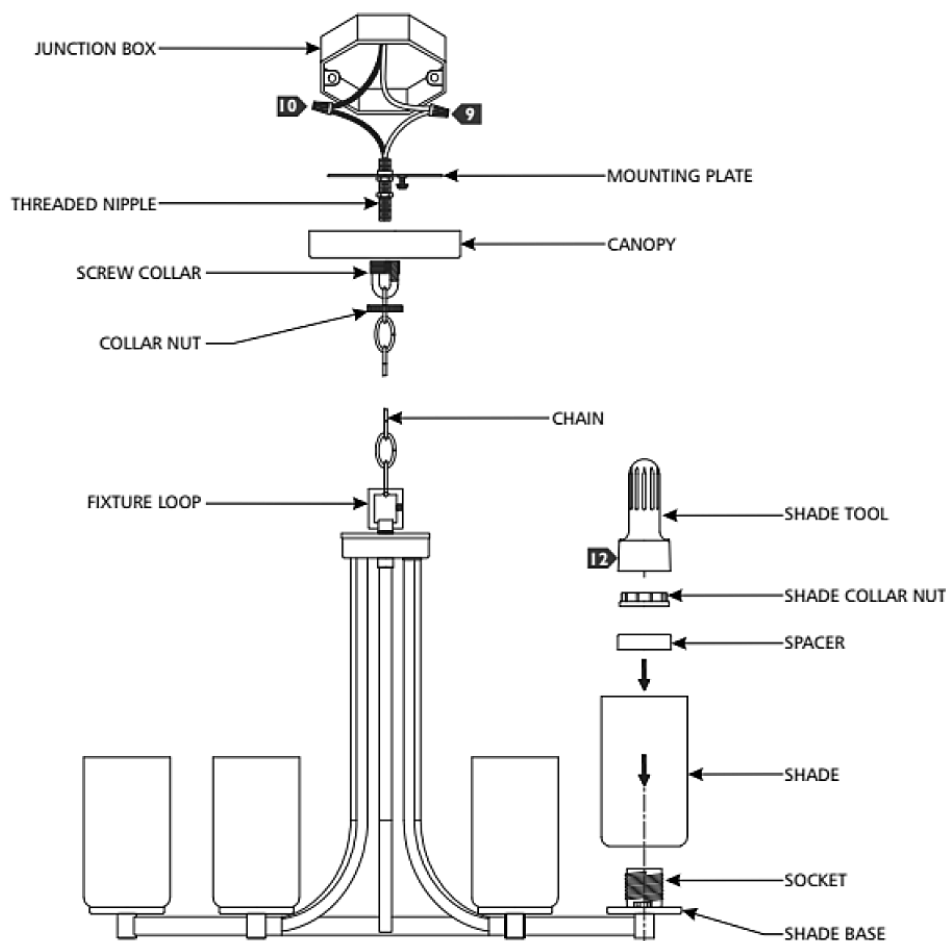

## INSTRUCTIONS

### I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Determine the desired height of the fixture and remove a portion of the chain by opening a link with pliers.
4. Open the chain link with pliers and install the chain on the fixture loop. Close the link.
5. Unscrew the collar nut from the screw collar, then install the collar nut and canopy onto the chain in that order.
6. Open a link on the other end of the chain with pliers and install the chain onto the screw collar. Close the link.
7. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire to hot power line wire
  - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires behind the mounting bar into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Place the shade and spacer onto the shade base, then secure them in place by screwing the shade collar nut onto the socket using the shade tool. Repeat for all shades.
3. Screw the lamps into the sockets to finish. Refer to the socket labels for max wattage information.