

KERRVILLE THREE LIGHT PENDANT

6615203

General Product Information



Intertek

SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE [visualcomfort.com](http://visualcomfort.com) FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

**CAUTION-RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



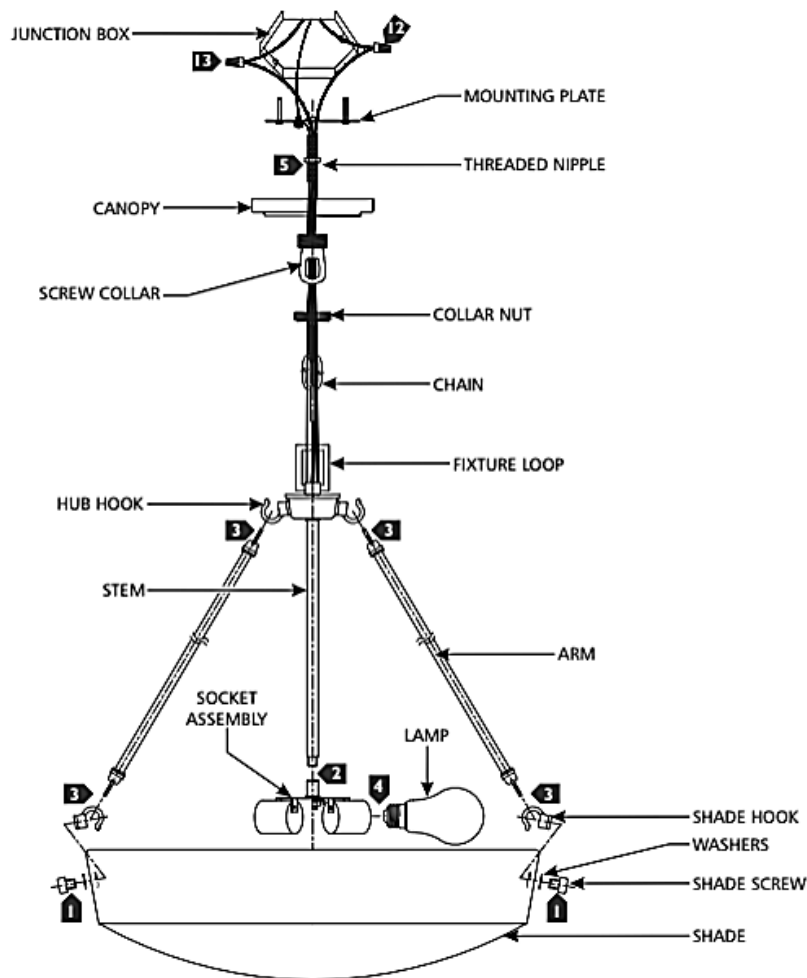

## INSTRUCTIONS

### I. Preparing the Fixture

1. Place a washer onto a shade screw, insert the shade screw into the shade, place another washer onto the screw, and screw the shade hook onto the shade screw. Repeat for remaining side.
2. Feed the cord through the stem and fixture loop, then screw the stem to the socket assembly.
3. Hook the arms onto the hub and shade hooks to install them.
4. Screw the lamps into the sockets. Refer to the label in the socket for Max Wattage Information.
5. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
6. Secure the mounting plate to the junction box.
7. Screw the screw collar tightly onto the threaded nipple.
8. Determine the desired height of the fixture. Open a link and remove it from the bottom to remove a portion of the chain.
9. Install the canopy and the collar nut onto the chain, then install the open link onto the fixture loop and close the link to secure it in place.
10. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire to hot power line wire
  - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar to complete the installation.

