

# Hettinger 2 Light Semi-Flush Convertible Pendant

**7739102** | **1.0**

## GENERATION LIGHTING

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

### SAVE THESE INSTRUCTIONS!

#### CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

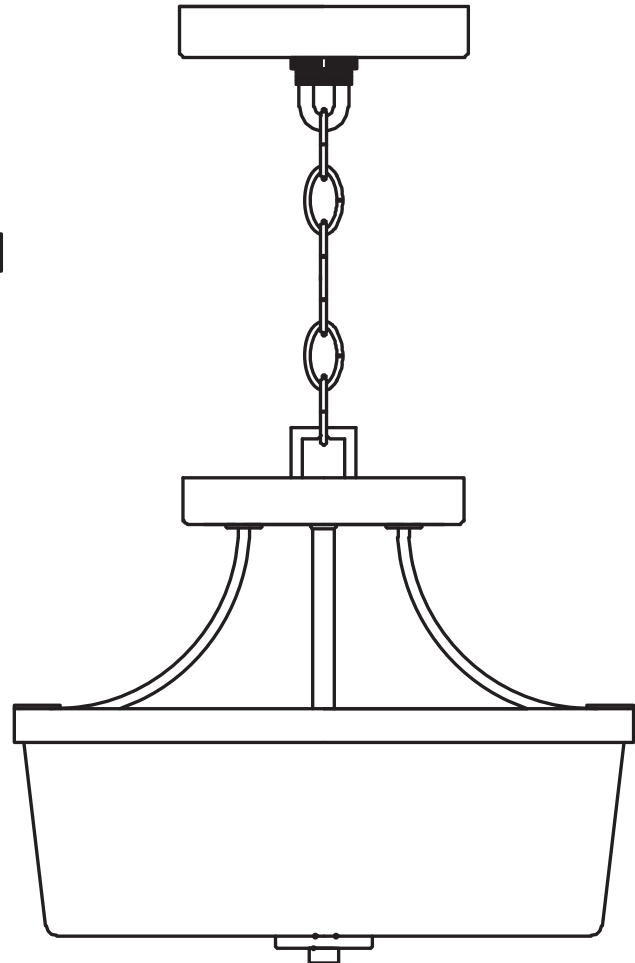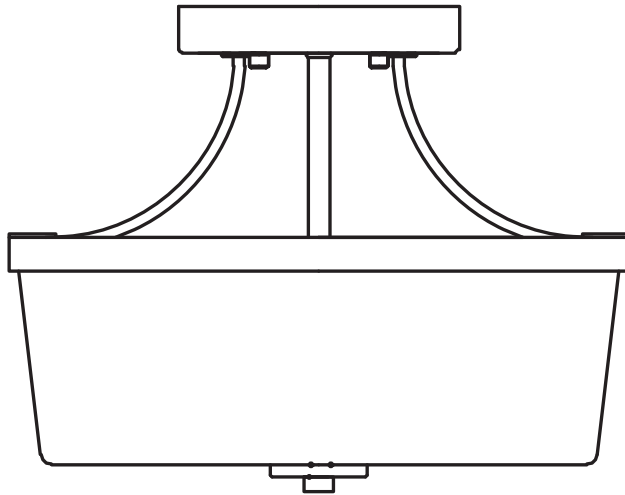

# Install the Fixture

1A

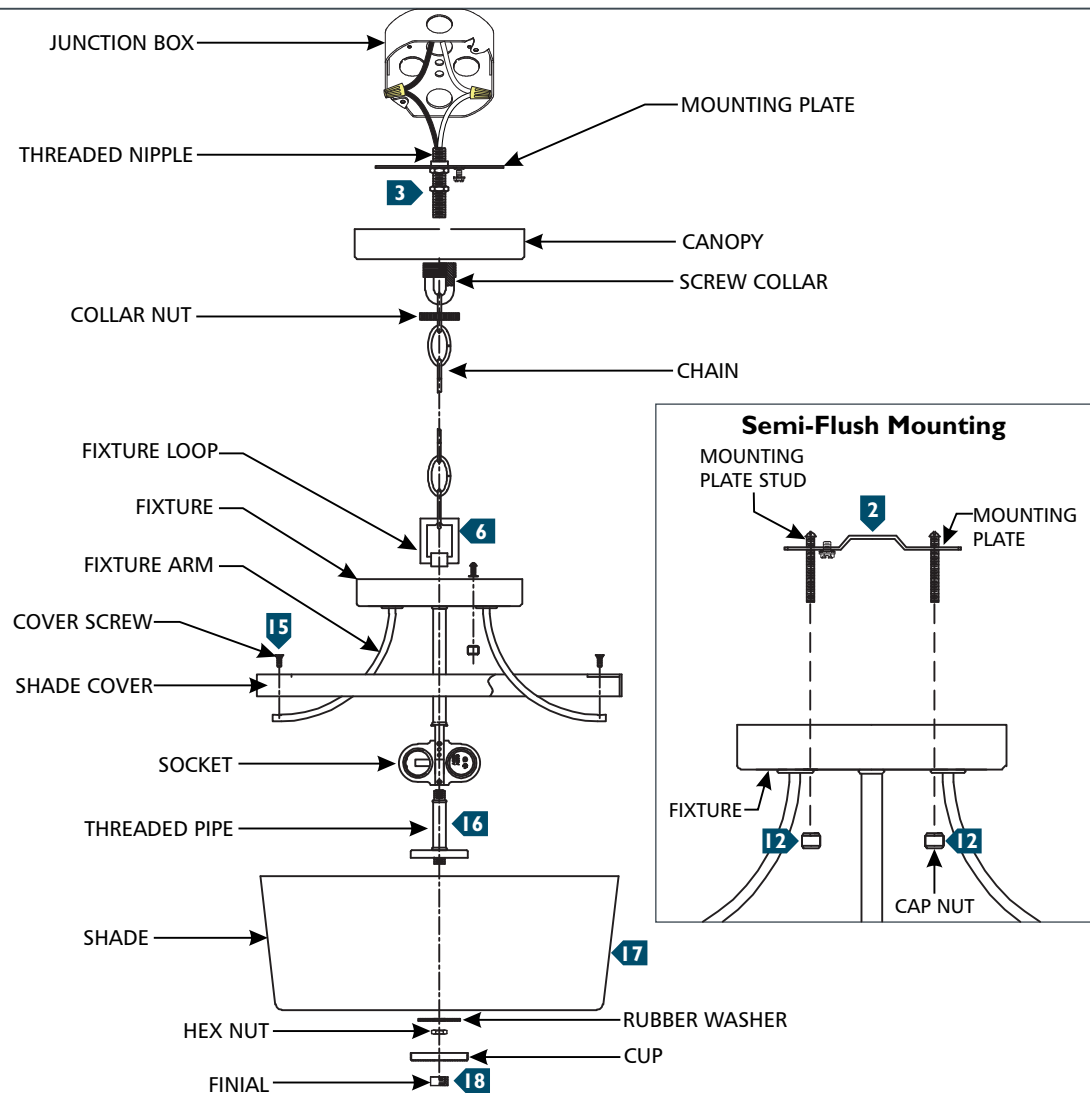

- 1** **FOR SEMI-FLUSH MOUNT ONLY:** Unscrew and remove the fixture loop from the fixture, then remove the cap nut screws and washers by unscrewing the cap nuts.
- 2** **FOR SEMI-FLUSH MOUNT ONLY:** Install the mounting plate with the two mounting studs to the junction box. **SKIP TO STEP 9**
- 3** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 4** Temporarily unscrew and remove the collar nut from the screw collar, then screw the screw collar tightly onto the threaded nipple.
- 5** Secure the mounting plate to the junction box.
- 6** Screw the fixture loop onto the fixture. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
- 7** Install the canopy and collar nut onto the chain (in that order), then install the open link onto the fixture loop and secure it in place by closing the link.
- 8** Weave the cord through the chain and canopy, then trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** **FOR SEMI-FLUSH MOUNT ONLY:** Align, then place the fixture onto the mounting plate studs and secure it with the two cap nuts. **SKIP TO STEP 14**
- 13** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 14** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 15** Install the shade cover to the fixture arms and secure it in place using the cover screws.
- 16** Screw the threaded pipe to the bottom of the socket assembly.
- 17** Place the shade and rubber washer onto the threaded pipe and secure them in by screwing the hex nut onto the threaded pipe.
- 18** Place the cup onto the threaded pipe and secure it by screwing the finial onto the threaded pipe.