

Finnegan Island Chandelier

F3147/5, F3148/7 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer.

LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

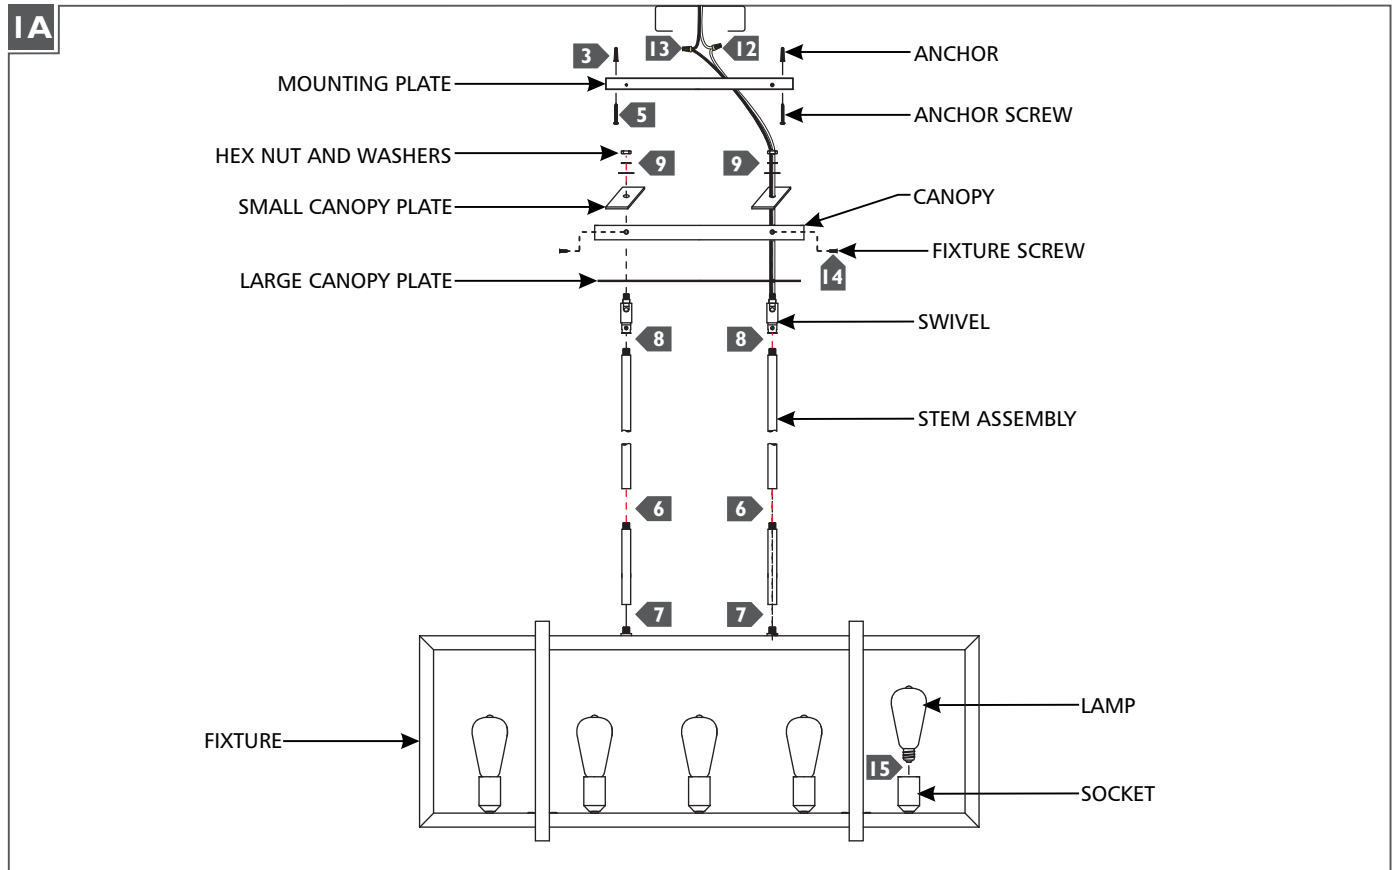

- 1 Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate.
- 3 Install the anchors to the marked points.
- 4 Secure the mounting plate to the junction box.
- 5 Screw the anchor screws into the anchors.
- 6 Determine the height of the fixture with the provided stems and assemble them by screwing them together.
- 7 Feed the cord through the stem assembly and screw the stem assemblies to the fixture.
- 8 Feed the cord through the swivels and screw them to the stem assemblies.
- 9 Feed the cord through the large canopy plate, canopy, small canopy plates, washers, and nuts, then place them onto the swivels and secure them together with the washers and nuts.
- 10 Pull the power line wires out of the junction box. Trim the cord leaving enough to make electrical connections.
- 11 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 12 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place with the fixture screws.
- 15 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.