




ROBIE 3 & 5-LIGHT CHANDELIERS

3121603; 3121605

General Product Information










Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



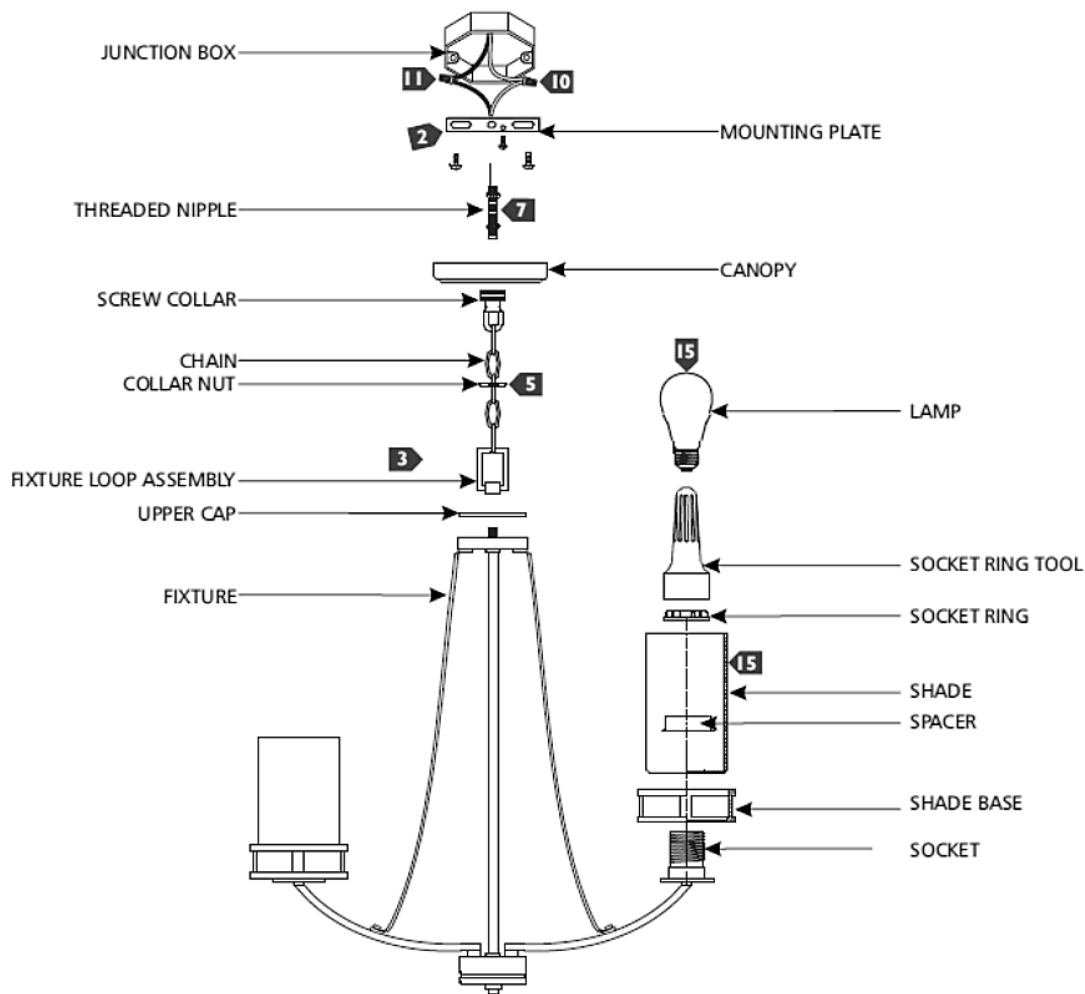

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Feed the cord from the fixture through the upper cap and fixture loop assembly and screw them together.
4. Determine the desired height of the fixture and use pliers to open a link and remove a portion of the chain.
5. Open the chain link with pliers and install the chain on the fixture loop, then close the link.
6. Unscrew the collar nut from the screw collar. Then, install the collar nut and the canopy onto the chain.
7. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Close the link.
8. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Place the shade base, shade, and spacer over the socket and secure them in place with the socket ring using the socket ring tool.
3. Screw the lamps into the sockets. Refer to the socket label for max wattage information.
4. Place two washers onto the threaded pipe and slide the shade over the center rod. Secure them in place with two washers and a hex nut.
5. Place the lower cap onto the threaded pipe and secure in place with the finial.