

CARSON SMALL, MEDIUM, LARGE, & GRANDE VANITIES

KWL1081; KWL1091; KWL1101; KWL1111


General Product Information



ETL  
LISTED  
Intertek



SAVE THESE  
INSTRUCTIONS!



STANDARD  
INSTALLATION



INDOOR



DAMP LOCATION  
SAFE




DIMMABLE  
(LED, ELV, TRIAC & 10V)



INTEGRATED LED  
NO BULBS REQUIRED



NEC COMPLIANT  
JUNCTION BOX



BEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVES



PLEASE SEE  
[visualcomfort.com](http://visualcomfort.com)  
FOR PRODUCT  
SPECS



CLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!



Product Warranty




FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD  
SCREWDRIVER



WIRE CUTTER



ALLEN WRENCH

Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

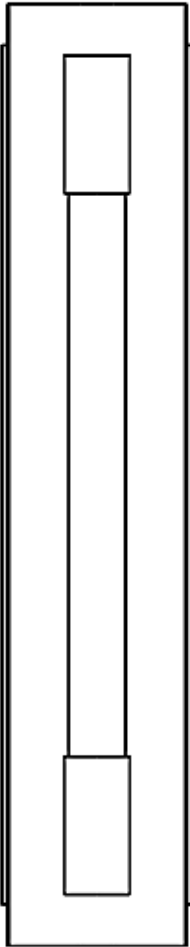

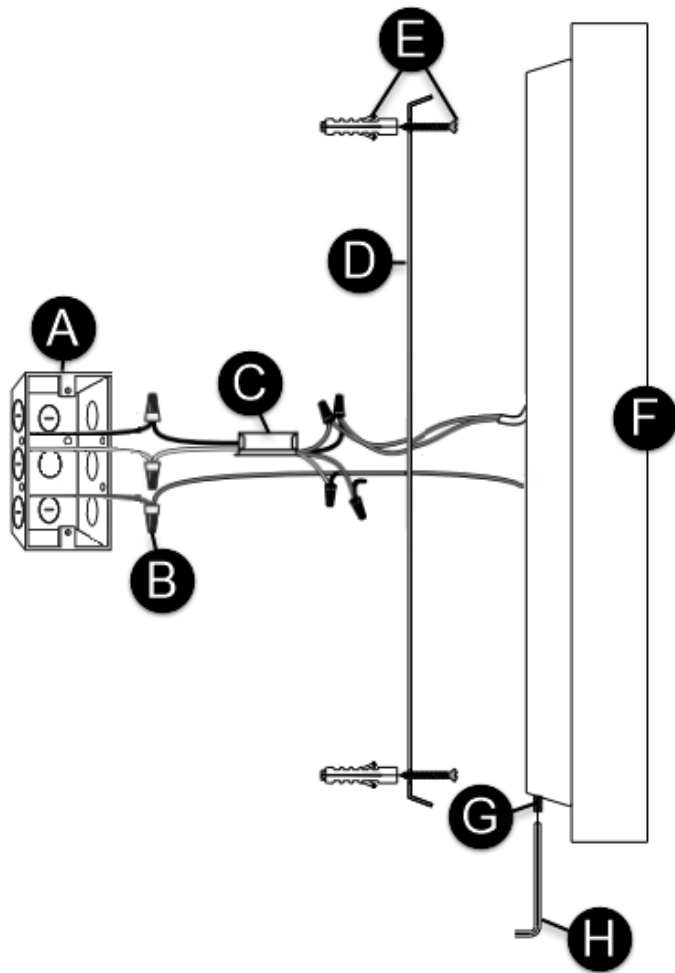

## FIXTURE PARTS

- A. 2" x 4" Junction Box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Anchors & Anchor Screws
- F. Fixture
- G. Set Screw
- H. Allen Wrench

## INSTRUCTIONS

### I. Preparing the Fixture

1. Separate the mounting plate from the fixture by loosening (do not remove) the set screw with the provided Allen wrench.
2. Secure the mounting plate to the 2" x 4" junction box and the wall with the provided anchors and anchor screws.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Neutral driver wire (white) to neutral power line wire
  - b) Hot driver wire (black) to hot power line wire
3. Secure the mounting plate to the junction box using the mounting screws, ensuring the driver output wires are accessible.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Black (negative) driver wire (output) to blue fixture wire
  - b) Red (positive) driver wire (output) to red fixture wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
7. Carefully tuck the driver and all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. Install the fixture onto the mounting plate from the top, then rotate it down and secure it in place by tightening the set screw with the Allen wrench.