

CANFIELD 3, 5, & 9 LIGHT CHANDELIERS

3128803; 3128805; 3128809


General Product Information



ETL  
LISTED  
Intertek



SAVE THESE  
INSTRUCTIONS!




STANDARD  
INSTALLATION



INDOOR




DAMP LOCATION  
SAFE



NEC COMPLIANT  
JUNCTION BOX



BULB(S)  
(NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE  
[visualcomfort.com](http://visualcomfort.com)  
FOR PRODUCT  
SPECS



CLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!



BEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD  
SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



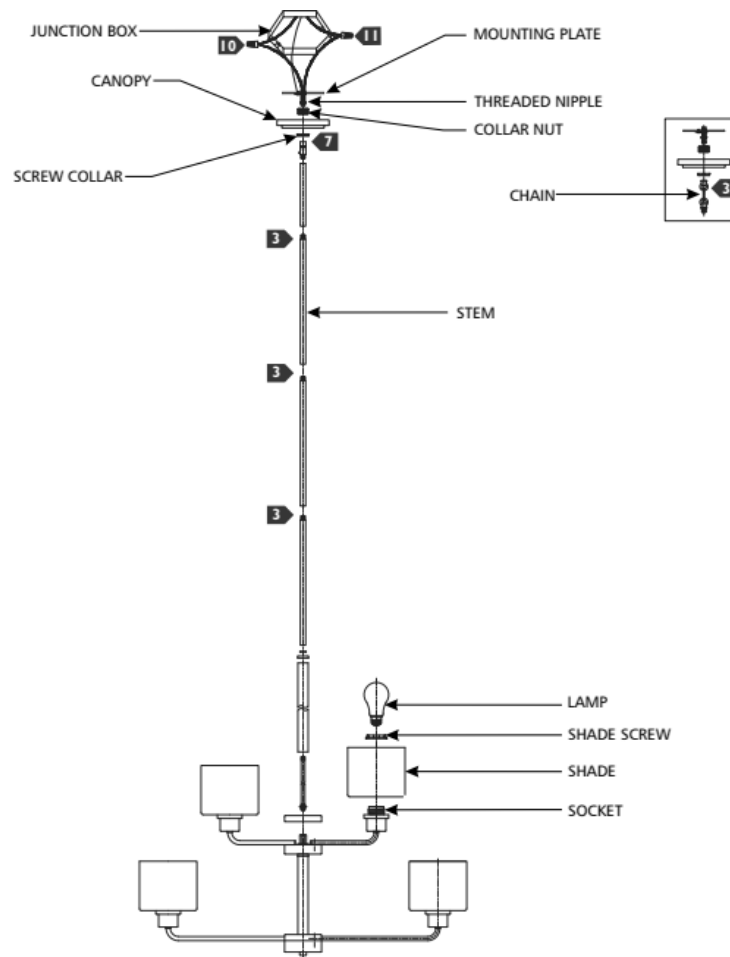

## INSTRUCTIONS

### I. Preparing the Fixture

1. Align the holes on the shade with the holes on the shade base and secure it with the shade screws. Repeat for all shades.
2. Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
3. Determine the desired height or look of the fixture with the provided stems and/or chain and assemble them by screwing them together. All parts may be used alone or in combination.
4. Feed the fixture wires through the hub cover, threaded rod, rod cover, spacer, and washer and screw the assembly to the fixture.
5. Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
6. If necessary, screw the threaded nipple tightly onto the mounting plate.
7. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
8. Align and secure the mounting plate to the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire to hot power line wire
  - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.