

Mahone Flush Mount

7550893S, 7650893S, 7750893S,
7850893S, 7950893S

1.0

VISUAL COMFORT & CO.

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

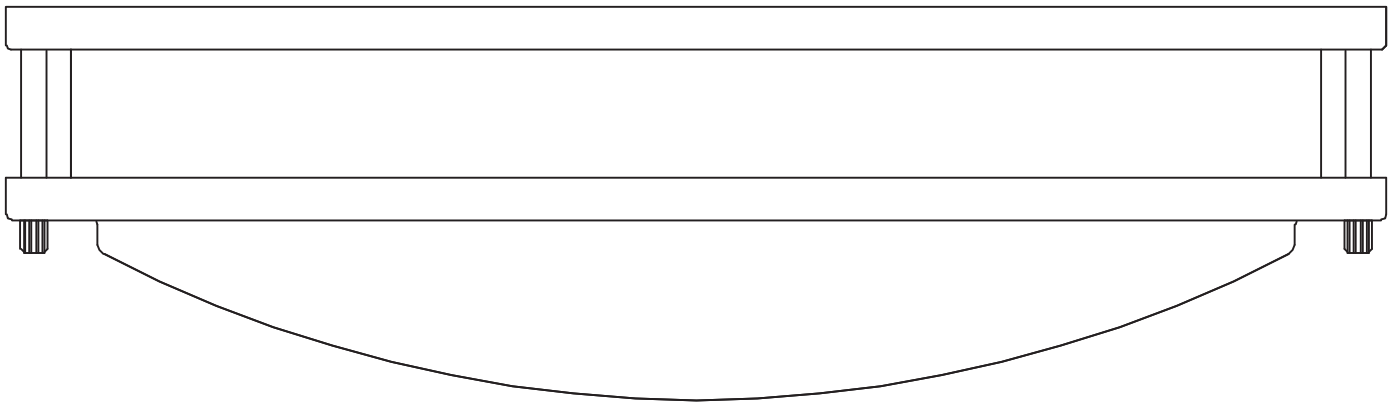

SAVE THESE INSTRUCTIONS!

Install the Fixture

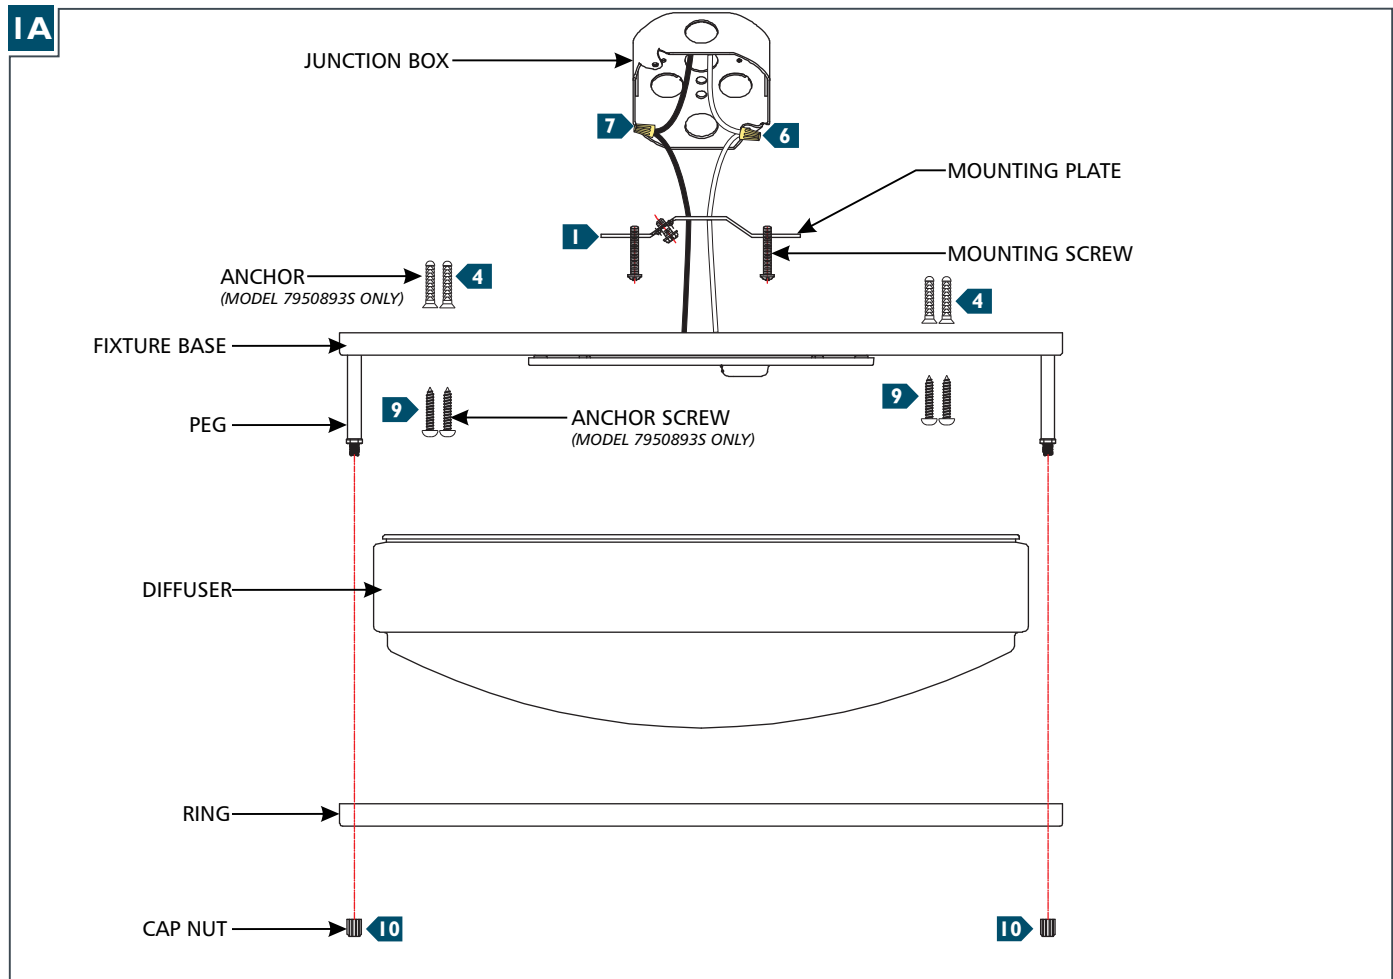

- 1** Secure the mounting plate to the junction box leaving enough of the mounting screw exposed to mount the fixture.
- 2** **For Model 7950893S Only:** Temporarily install the fixture to the mounting plate by aligning the keyed slots on the fixture base to the mounting screws, place the fixture base onto the mounting plate, and secure it by rotating it to the narrow portion of the keyed slot. Fully tighten the mounting screws to secure the fixture in place.
- 3** **For Model 7950893S Only:** Mark the anchor hole locations through the holes on the fixture base, then remove the fixture base from the mounting plate.
- 4** **For Model 7950893S Only:** Drill appropriate sized holes at the marked locations and install the anchors.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8** Align the keyed slots on the fixture base to the mounting screws, place the fixture base onto the mounting plate, and secure it by rotating it to the narrow portion of the keyed slot. Fully tighten the mounting screws to secure the fixture in place.
- 9** **For Model 7950893S Only:** Screw the anchor screws into the anchors.
- 10** Place the diffuser into the ring, then secure the ring to the pegs on the fixture using the cap nuts.