

RAVENWOOD MANOR FIVE & NINE LIGHT CHANDELIER

3110205; 3110209

General Product Information



SAVE THESE INSTRUCTIONS!




STANDARD
INSTALLATION



INDOOR/
OUTDOOR



DAMP LOCATION
SAFE



NEC COMPLIANT
JUNCTION BOX




BULB(S)
(NOT INCLUDED)



CONVERTS TO LED



DIMMER
COMPATIBLE



PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES



Tools Required



PHILLIPS-HEAD
SCREWDRIVER



ELECTRIC DRILL



WIRE CUTTER



PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



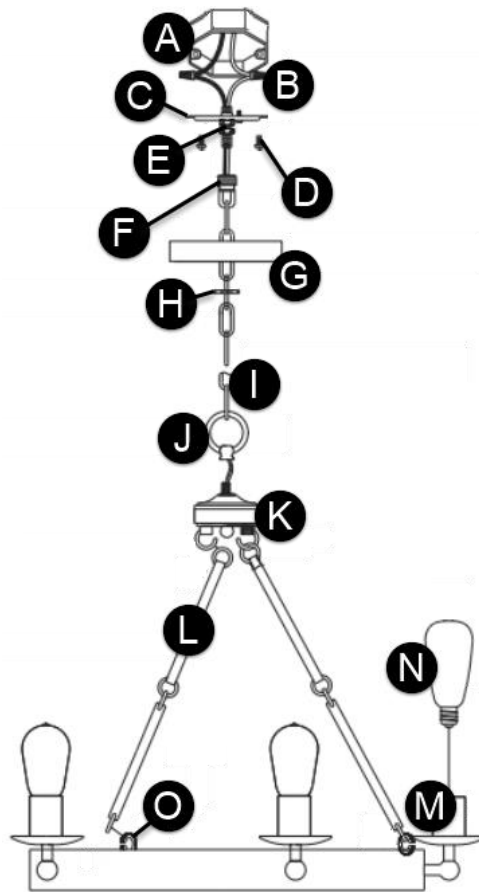

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Threaded Nipple
- F. Screw Collar
- G. Canopy
- H. Collar Nut
- I. Chain
- J. Fixture Loop
- K. Fixture Base & Eyelets
- L. Fixture Arms
- M. Sockets
- N. Bulbs
- O. Fixture Eyelets

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the electrical box with the two provided mounting plate screws.
2. Screw the fixture loop onto the fixture.
3. Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
4. Determine the desired height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
5. Install the canopy and collar nut onto the chain, then install the open link onto the fixture loop and close the link to secure it in place.
6. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the electrical box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the bulbs into the sockets.
3. With the help of another person, connect the lower portion of the chandelier to the top by hooking each fixture arm into the corresponding eyelets.