

TOWNER THREE & FIVE LIGHT PENDANTS

5141303; 5141305

General Product Information



SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



CONVERTS TO LED



DIMMER COMPATIBLE



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



PLIERS



ELECTRIC DRILL

Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

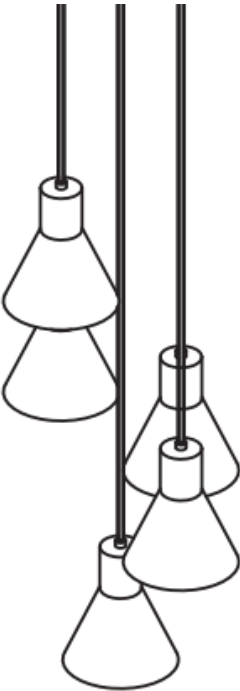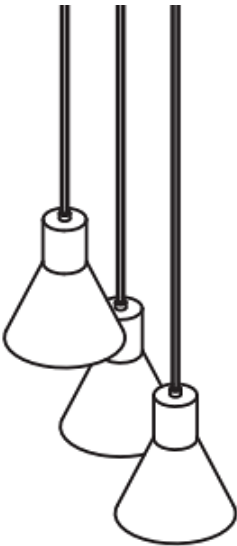

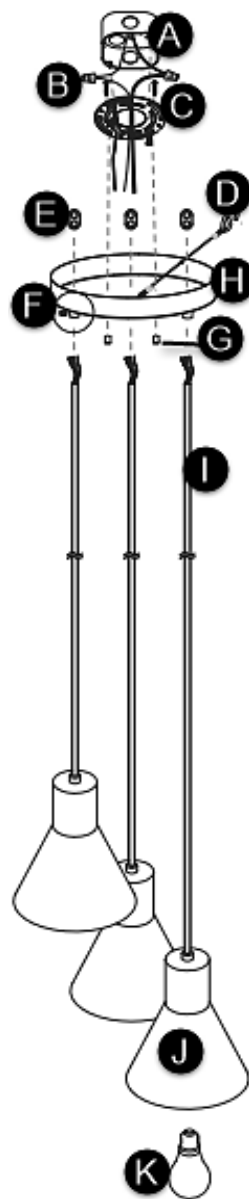

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate, Mounting Studs, & Threaded Stud
- D. Canopy
- E. Strain Relief
- F. Strain Relief Collar & Collar Screw
- G. Cap Nuts
- H. Canopy
- I. Fixture Cords
- J. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Determine the desired length of the fixture, loosen the collar screw, and feed the fixture cords through the strain relief collar, canopy, and strain relief. Tighten the collar screw.
2. Cut the excess cord, leaving 6" of cord behind. Strip the insulation 4", **making sure not to nick the inner wires**, and strip the end of the wires.
3. Install threaded studs to the mounting plate and secure with a nut if necessary. Secure the mounting plate to the junction box.
4. Hook the installation cable to the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black, smooth) fixture wire to hot power line wire
 - b) Neutral (white, textured) fixture wire to neutral power line wire
5. Carefully tuck all the wires behind the mounting bar into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate studs and secure it in place by screwing the cap nuts onto the threaded studs.
2. Screw the bulbs into the sockets. Refer to the socket labels for max wattage information.