


Assembly Instructions For

F2303/8 (E) 9/07

			
①	②	③	④
8 pcs.	40 pcs.	1 pc.	1 pc.

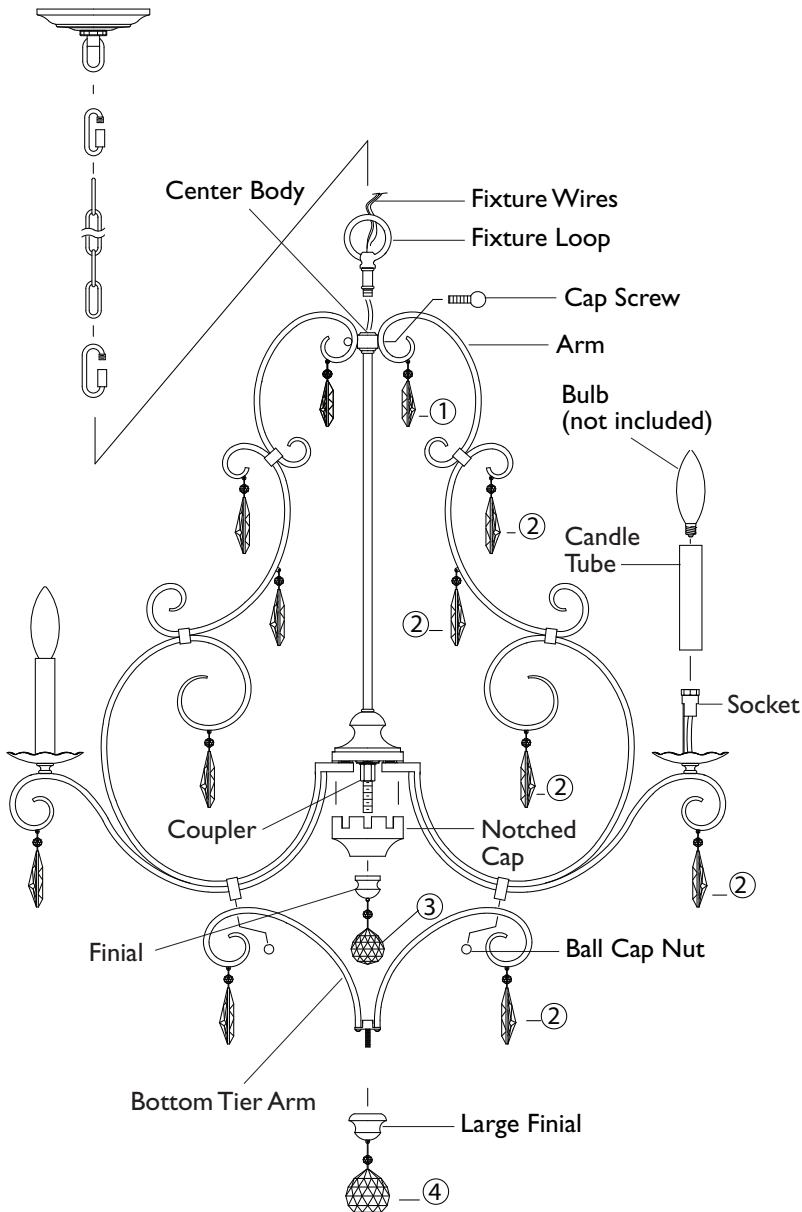

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Spread open arms so they are evenly spread to each other. Then lock upper section of arms with cap screw onto corresponding holes at center body.
2. Screw bottom threaded pipe into coupler. Slide notched cap over bottom threaded pipe and lock arms into its notches. Lock notched cap into position by fastening finial onto bottom threaded pipe.
3. Carefully thread fixture wire and ground wire through fixture loop. Screw fixture loop onto center body until secure.
4. Spread open lower tier arms so they are evenly spaced to each other. Then install the arms onto middle tier arms by fastening with ball cap nuts.
5. Follow enclosed "Chain Suspended Fixture Installation Instructions" for electrical and fixture installation onto ceiling outlet box.
6. Install large finial onto bottom section of lower tier arm.
7. Place candle tubes over candelabra sockets and screw bulbs (not included) into sockets to secure. See relamping label on candle tube or type and maximum allowed wattage.
8. Hang all crystal glass parts as shown on drawing. **NOTE:** To replace broken crystals extras are included in hardware bag. Replace by gently bending open pins, remove broken crystal, hook new one, then close back pins. Avoid bending pins into sharp angle.

GENERATION LIGHTING