

HOWELL MEDIUM POST LANTERN

DJO1041

General Product Information



SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



OUTDOOR



WET LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS




CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER



ELECTRIC DRILL

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. Post
- B. Wire Nut Connections
- C. Fixture Base & Post Cup
- D. Mounting Screws
- E. Fixtures Screws
- F. Socket
- G. Bulb (Not Included)
- H. Shade
- I. Shade Tabs
- J. Glass Shade Inserts

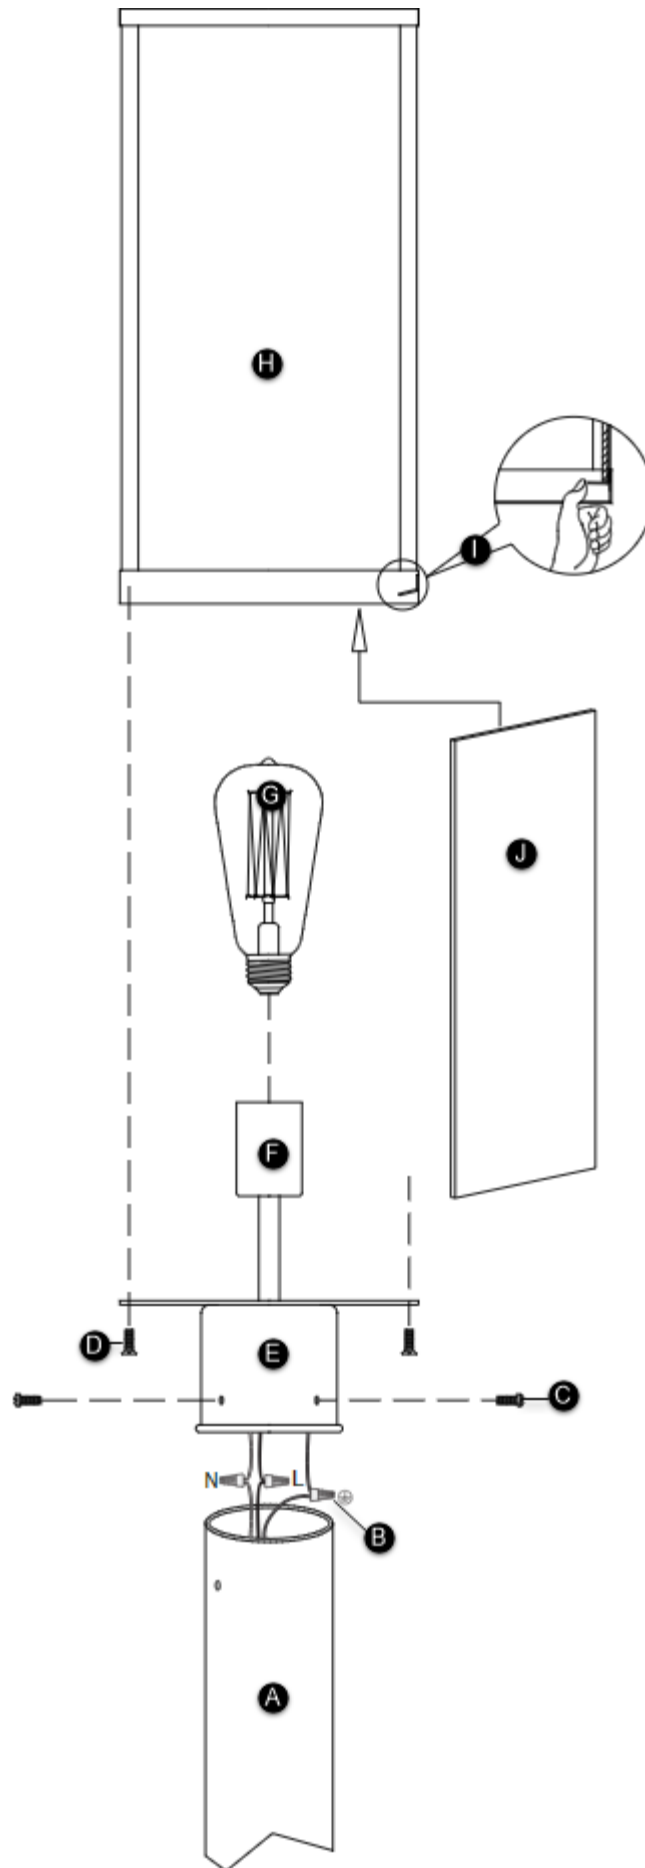

INSTRUCTIONS

I. Preparing the Fixture

1. Screw the bulb into the socket. Please refer to the label on the socket for Max Wattage information.
2. Insert the glass shade inserts into the lantern and secure them by closing the tabs.
3. Slip the shade over the fixture base and secure it in place using the fixture screws.
4. Next, slip the post cup over the post and mark the position of holes in the post cup on the post.
5. Remove the post cup and expose the supply wires above the post.
6. Drill 1/8”(3mm) diameter pilot holes in the post at the locations previously marked.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Slip the post cup onto the post.
2. Align the holes in the post cup with the holes in the post.
3. Attach the post cup to the post with the provided fixture screws.