



ELIO SMALL, MEDIUM, & LARGE HANGING SHADES

EP1411; EP1349; EP1404

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

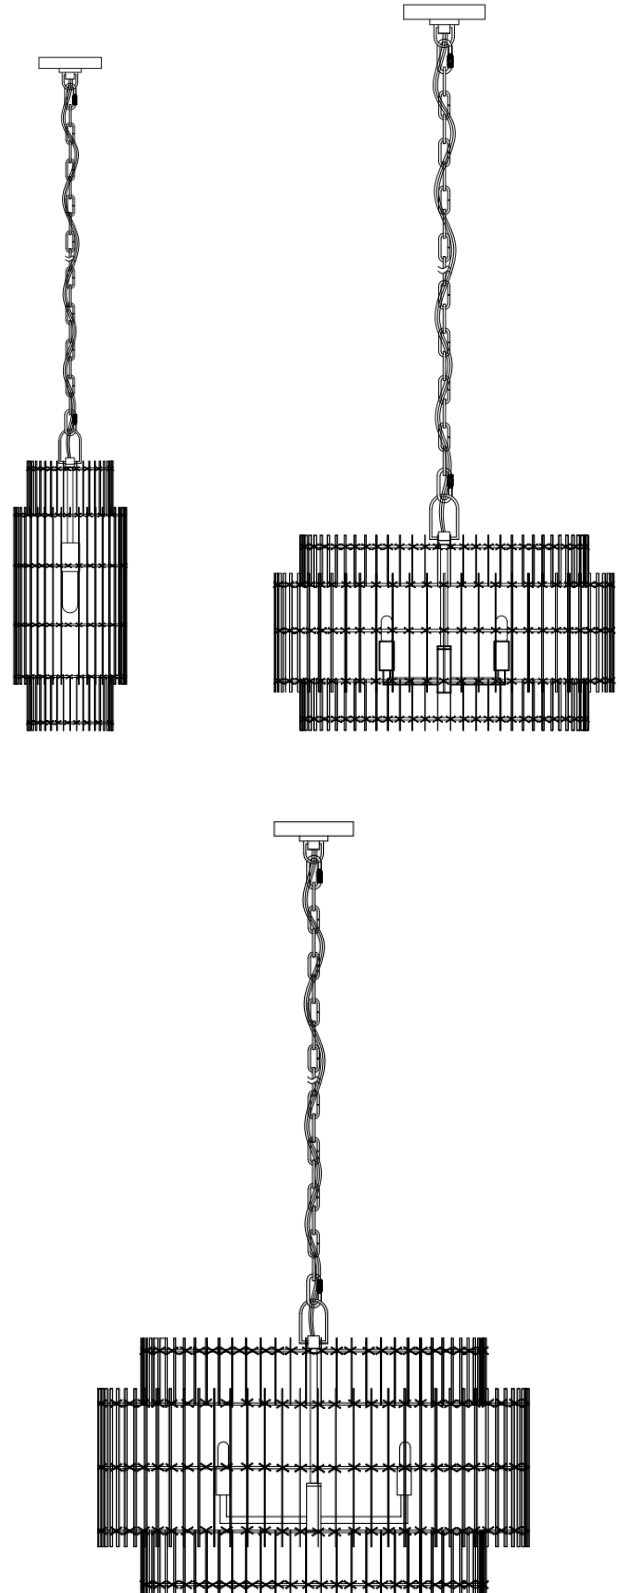

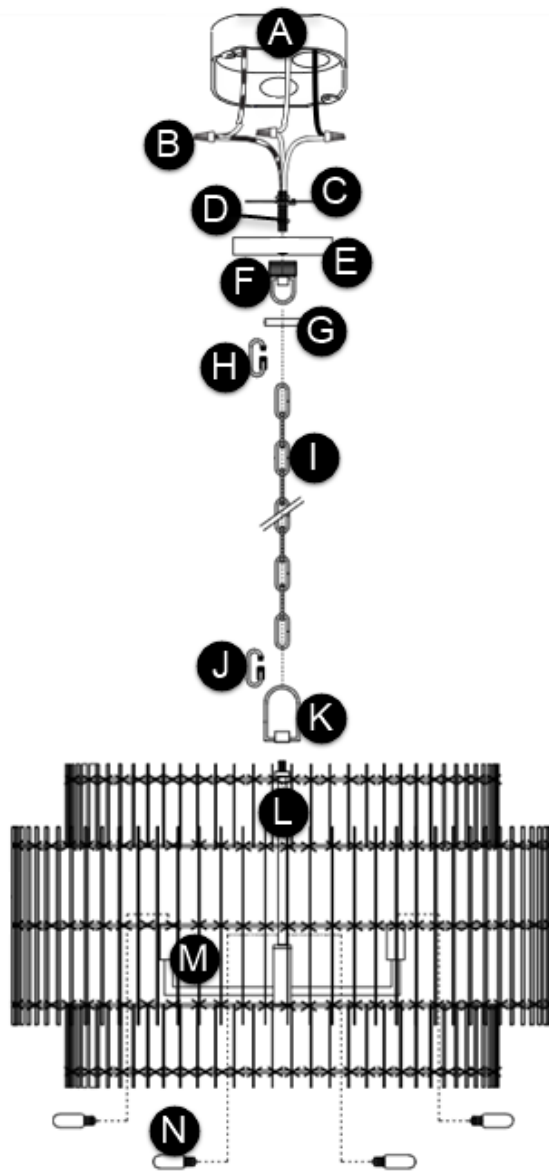

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar & Mounting Screws (Not Illustrated)
- D. Threaded Nipple
- E. Canopy
- F. Screw Collar & Canopy Loop
- G. Collar Nut
- H. Upper Quick Link
- I. Chain
- J. Lower Quick Link
- K. Fixture Loop
- L. Fixture
- M. Sockets
- N. Bulb (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Screw the threaded nipple onto the mounting bar then secure the collar loop onto the threaded nipple if necessary.
2. Install the mounting bar to the junction box.
3. Shorten the chain as desired using pliers.
4. Feed the fixture wires through the fixture loop and screw it onto the fixture, then secure the bottom end of the chain onto the fixture loop using the bottom quick link.
5. Unscrew the collar nut from the canopy loop, then slide the collar nut and the canopy onto the chain carefully (in that order).
6. Install the top quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white/textured, ribbed) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place with the collar nut.
2. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.