




WITLEY MINI, SMALL, MEDIUM, LARGE, & X-LARGE WALL LANTERNS

SLO1031; SLO1041; SLO1052; SLO1063; SLO1074

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

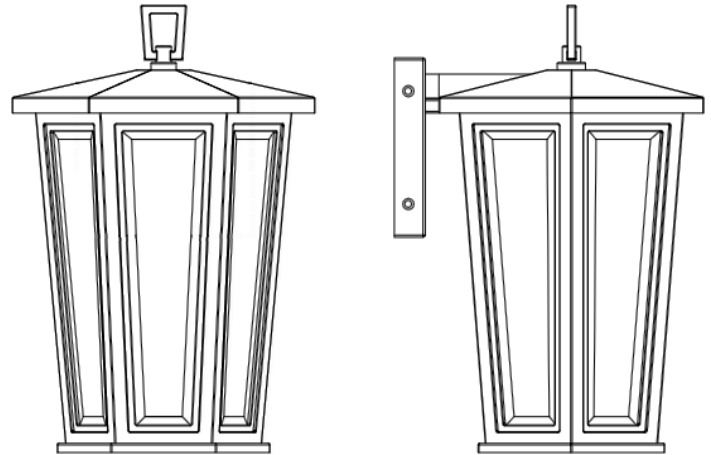

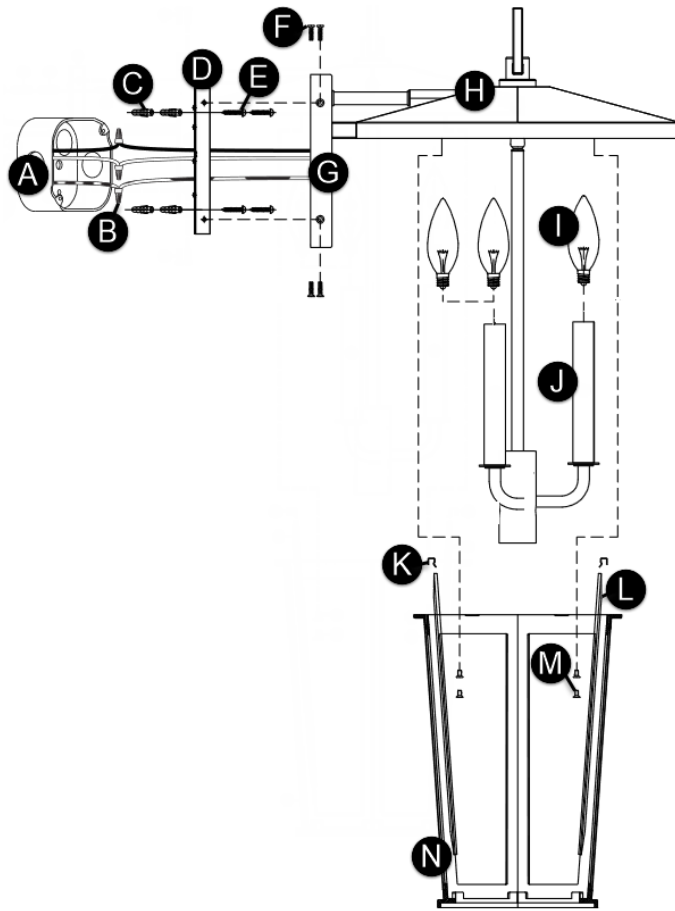

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Anchors (**For SLO1052, SLO1063, and SLO1074 only**)
- D. Mounting Plate
- E. Anchor Screws (**For SLO1052, SLO1063, and SLO1074 only**)
- F. Fixture Screws
- G. Fixture Base
- H. Fixture Cover
- I. Bulbs (Not Included)
- J. Sockets
- K. Glass Clips
- L. Glass Panels
- M. Cage Screws
- N. Cage

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. **For SLO1052, SLO1063, and SLO1074 only**, install the anchors as follows:
 - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes. Ensure that they are level.
 - b) Use an electric drill to drill the marked holes.
 - c) Insert the anchors into the holes.
3. Secure the mounting plate to the junction box with the mounting screws. **For SLO1052, SLO1063, and SLO1074 only**, further secure it with the anchor screws.
4. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.
5. Install the glass panels by carefully sliding them into the cage with the bevel facing outwards and secure them in place using the glass clips.
6. Place the cover over the cage, then secure them together with the cage screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black) fixture wire to hot power line wire
 - b) Neutral (white) fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the fixture base onto the mounting plate and secure them with the fixture screws.
2. For wet locations, caulk around the base of the fixture with a waterproof construction sealant.