



RUXTON LARGE & MEDIUM OUTDOOR WALLS

TFO1051; TFO1041

General Product Information

 Intertek	 SAVE THESE INSTRUCTIONS!	 STANDARD INSTALLATION	 OUTDOOR
 NEC COMPLIANT JUNCTION BOX	 WET LOCATION SAFE	 BULB(S) (NOT INCLUDED)	 CONVERTS TO LED
 PLEASE SEE visualcomfort.com FOR PRODUCT SPECS	 CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!	 BEST PRACTICE: HANDLE FIXTURE WITH GLOVES	
 Product Warranty	 FCC Statement		

Tools Required/Suggested

 ELECTRIC DRILL	 PHILLIPS-HEAD SCREWDRIVER	 CAULK GUN	 PENCIL/MARKER
---	--	--	--

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

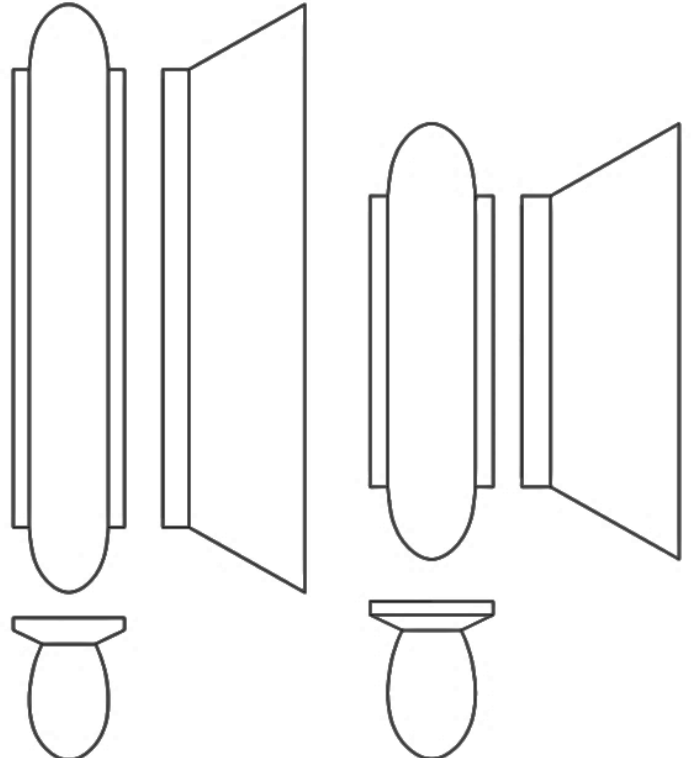

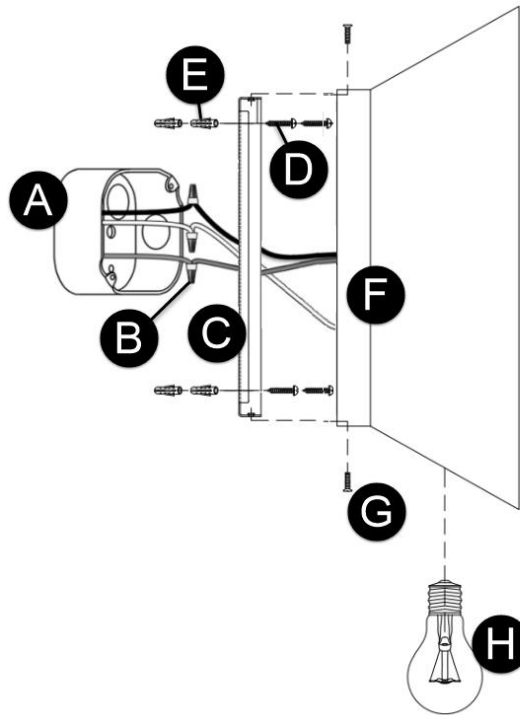

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Anchor Screws
- E. Anchors
- F. Fixture
- G. Fixture Screws
- H. Bulb (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture backplate.
2. Using the mounting plate holes as a guide, mark the desired anchor locations on the wall through the holes on the mounting plate.
3. Drill holes at the marked locations and install the anchors.
4. Install the mounting plate to the junction box, securing it with the mounting screws and anchor screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) to hot power line wire
 - b) Neutral fixture wire (white) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Install the fixture onto the mounting plate and secure it in place by screwing in the fixture screws.
2. Screw the bulb into the socket. Refer to the label on the socket for max wattage information.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.