

AMELIE MEDIUM & LARGE VANITIES

CV1071; CV1081

General Product Information



SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



INTEGRATED LED NO BULBS REQUIRED



DIMMABLE (LED, ELV, TRIAC & 10V)



HORIZONTAL OR VERTICAL INSTALL



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



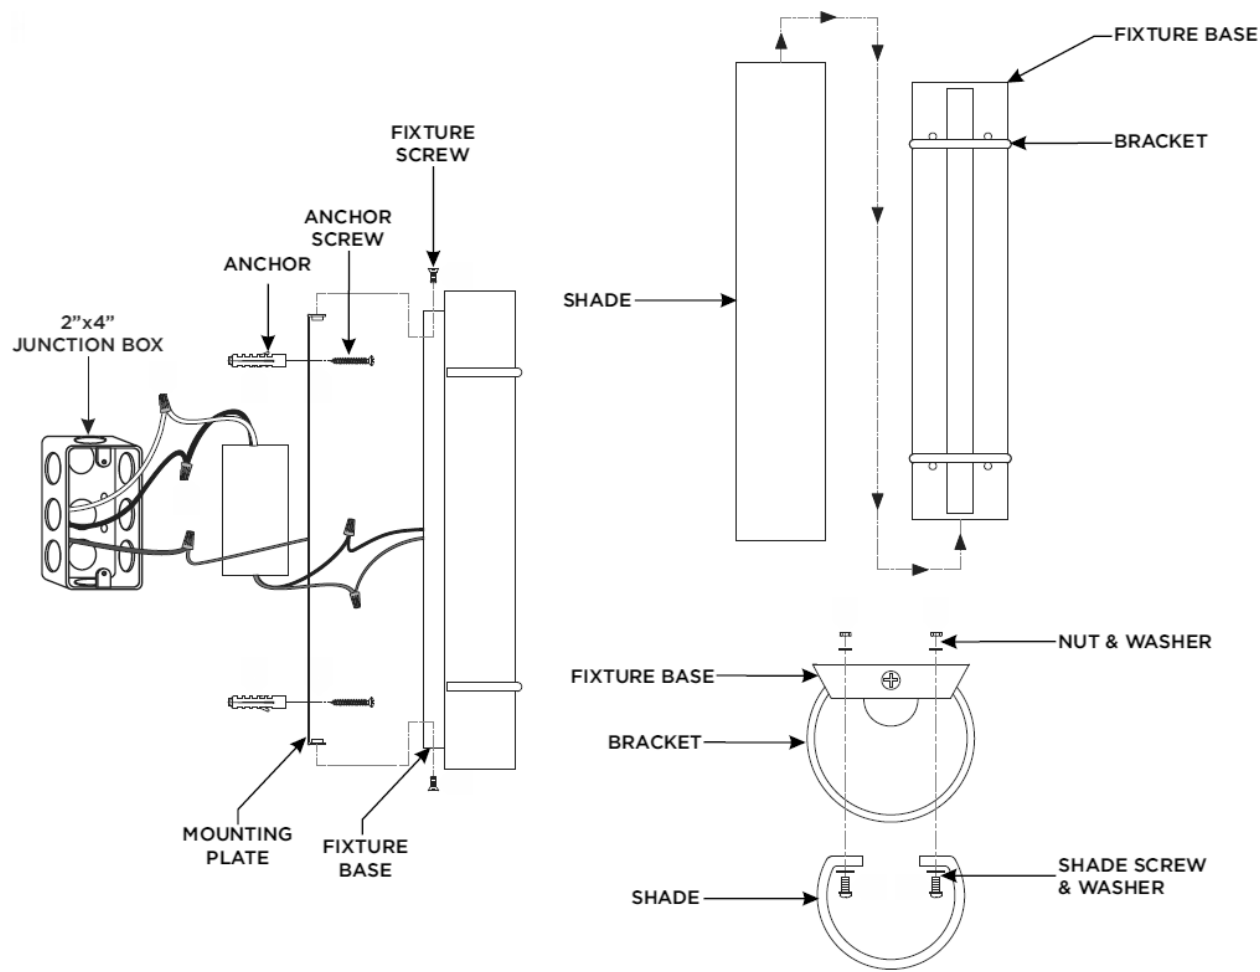

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base by removing the fixture screws.
2. Install the anchors as follows:
 - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes. Ensure that they are leveled.
 - b) Use an electric drill to drill the marked holes.
 - c) Insert the anchors into the holes.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Twist the bare ends of the following pairs of driver and power lines wires together with a wire nut to secure a connection:
 - a) White driver input wire to the neutral power line wire
 - b) Black driver input wire to the hot power line wire
3. Place the driver in the junction box.
4. Use the anchor screws to secure the mounting plate to the junction box.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Next, connect the following pairs of wires together using a wire nut:
 - a) Black fixture wire to the black driver output wire
 - b) Red fixture wire to the red driver output wire
7. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not using a dimmer.
8. Carefully tuck all the wires into the junction box/fixture base.

III. Installing the Fixture

1. Mount the base of the fixture onto the mounting plate and secure it in place by reinstalling the fixture screws.