




CORINNE SMALL, MEDIUM, LARGE & EXTRA-LARGE GLOBE PENDANTS


F3059; F3060; F3061; F3058

General Product Information

Please visit www.visualcomfort.com for product specs.



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Mounting Screws (Not Illustrated)
- D. Threaded Rod
- E. Ground Screw
- F. Canopy
- G. Canopy Loop
- H. Collar Nut
- I. Quick Link
- J. Chain
- K. Fixture Loop
- L. Washer
- M. Top Cover
- N. Top Cap
- O. Socket Assembly
- P. Bulbs (Not Included)
- Q. Candle Tube Follower
- R. Candle Tube
- S. Socket
- T. Finial
- U. Bottom Cover
- V. Bottom Cap
- W. Globe/Fixture Arms

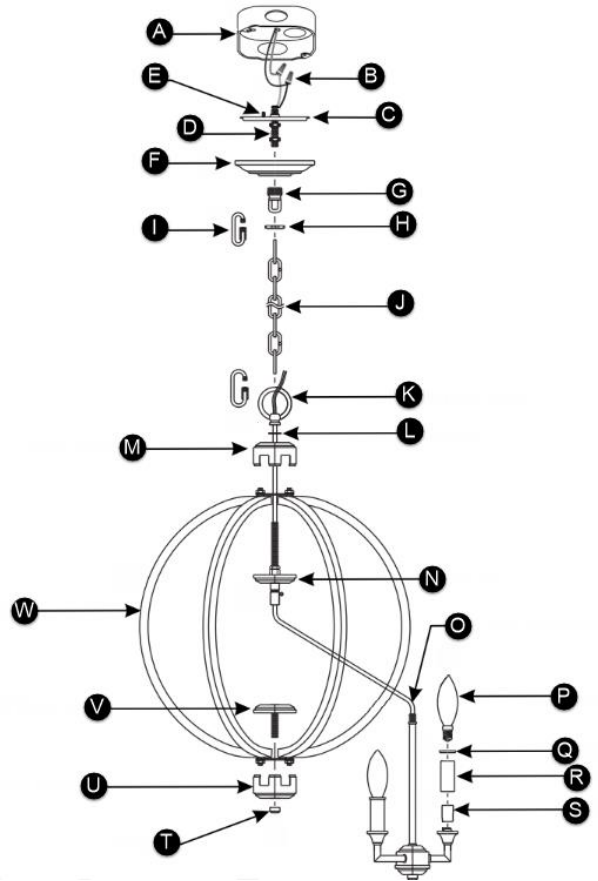

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded rod tightly onto the mounting plate and the canopy loop onto the threaded rod.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Assemble the globe by spreading all the fixture arms equally apart from one another, ensuring they match the slots on the top and bottom covers.
4. Feed the bottom cap through the inside of the globe bottom. Then install the bottom cover and secure it in place with the finial. Then feed the cord through the top cap and screw it to the socket assembly. Next, feed the top cap through the inside of the top of the globe. Then install the top cover and secure it in place with the washer and the fixture loop.
5. Install the candle tubes over each socket and then the candle tube followers on top of the candle covers.
6. Screw the bulbs into the sockets. Refer to socket label for max wattage information.
7. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
 - a) Remove a portion of the chain by opening a link with pliers and install the bottom end of chain onto the fixture loop using the lower quick link.
 - b) Unscrew the collar nut from the screw collar and install it onto the chain.
 - c) Then install the canopy onto the chain and the upper quick link onto the remaining end of chain and secure the quick link onto the canopy loop.
8. Weave the fixture cord through the top cover, washer, fixture loop, chain, collar nut, canopy loop, canopy, threaded rod, and out of the junction box.
9. Trim the cord leaving enough to make electrical connections.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire and hot power line wire (hot to hot)
 - b) Neutral fixture wire and neutral power line wire (neutral to neutral)
4. Carefully tuck all wires into the junction box.
5. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto the canopy loop.