

Capri Small and Large Globe Pendant

TP1031, TP1041 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

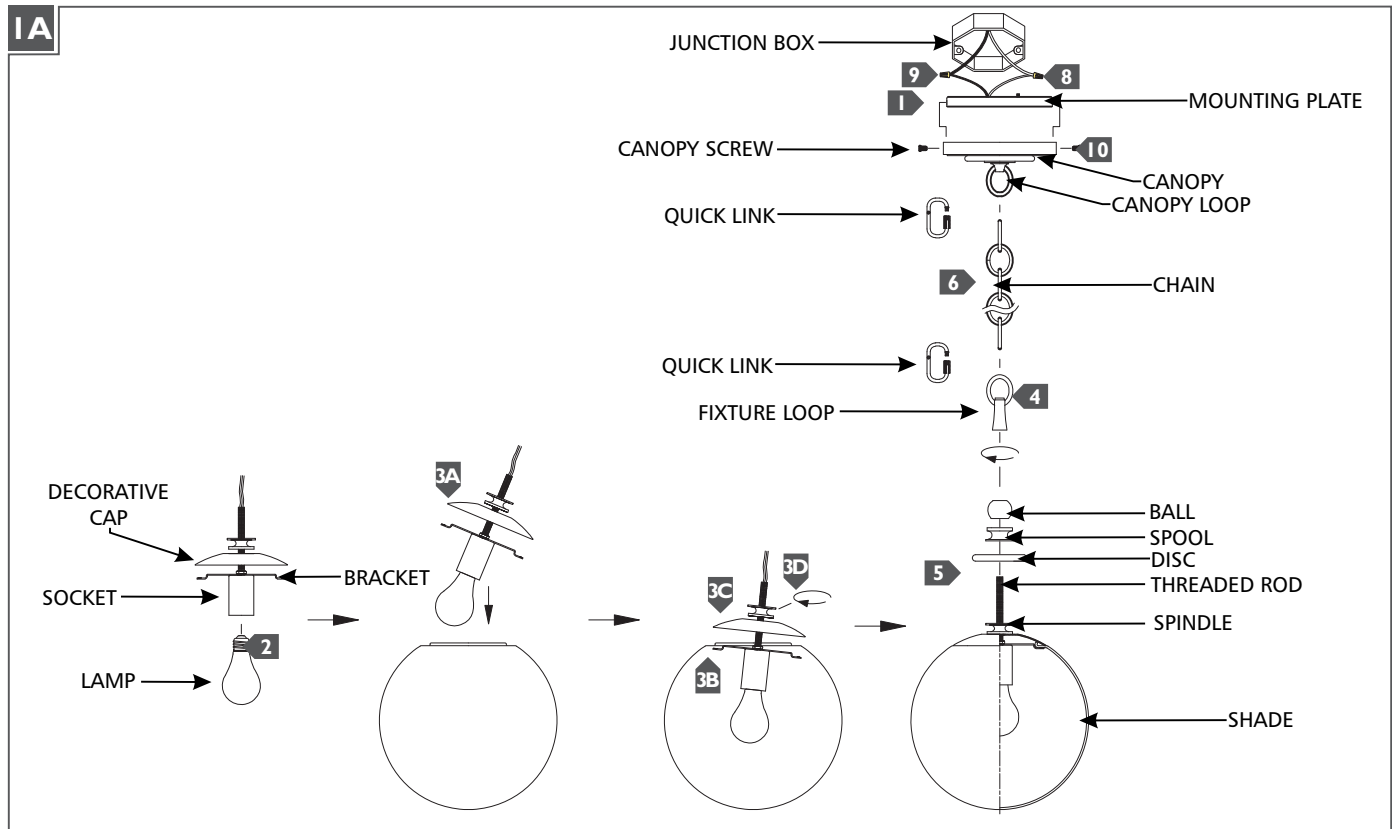

- 1 Secure the mounting plate to the junction box.
- 2 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage information.
- 3 Install the shade:
 - A) Insert the socket assembly into the shade at an angle.
 - B) Straighten the socket assembly so the shade rests evenly on the bracket.
 - C) Place the decorative cap over the glass.
 - D) Tighten the spindle against the decorative cap.
- 4 Install a quick link onto the end of the chain and fixture loop. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top. Then install the other quick link onto the chain and canopy loop.
- 5 Feed the fixture wires through the disc, spool, ball and fixture loop, in that order. Then tighten the fixture loop.
- 6 Weave the cord through the chain and canopy and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 7 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10 Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place with the provided canopy screws.

SAVE THESE INSTRUCTIONS!