

BILLIARD FIXTURE **INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION VERSION 1

- 1, Attach two Screws-1 outward through the CROSS BAR, spin the Hex nut to the Screw-1, then attach the CROSS BAR(6) to the OUTLET BOX by the two MOUNTING SCREWS.
 - 2, Make wire connections:
 - Smooth wire (w/markings) from the light to black wire from power source.
 - Ribbed wire (w/o markings) from the light to white wire from power source
 - Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX
 - 3, Place the Canopy against the Outlet box, secure with the Ball nut.
 - 4, Screw the hook ring onto the Nipple.
 - 5, Attach the Shade (SHADE SOLD separately) to the Socket and screw with the Socket Ring.
 - 6, Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).
- INSTALLATION IS NOW COMPLETED.

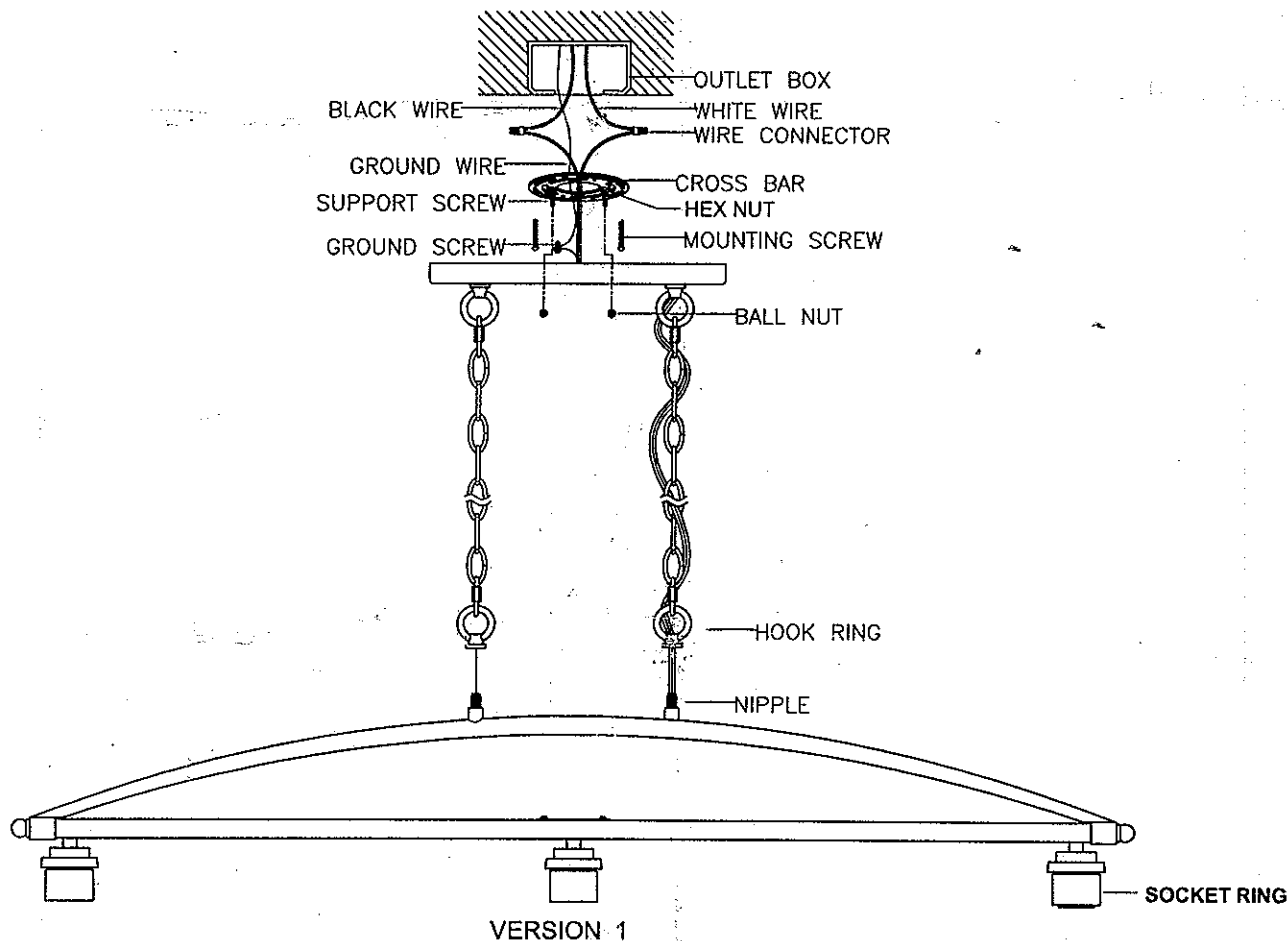

ITEM NO. 2453-BN, 2453-DG

ASSEMBLY AND INSTALLATION VERSION 2

- 1, Connect the Pipe (1),(2),(3),(4),(5) together with the fixture. Then screw with the Swivel.
- 2, OUTLET BOX by the two MOUNTING SCREWS.
- 3, Screw the butterfly nut, key washer and metal washer from the threaded tube.
- 4, Make wire connections:
 --Twist together the white wire from the fixture with the white wire from outlet box. Cover with wire connector
 --Twist together the black wire from the fixture with the black wire from outlet box. Cover with wire connector
 --Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW.
- 5, Place the CANOPY against the OUTLET BOX by screwing the Ball Nut.
- 6, Attach the SHADE (not included) onto the SOCKET, screw SOCKET RING tightly.
- 7, Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).

INSTALLATION IS NOW COMPLETED.

