


ASSEMBLY INSTRUCTION FOR Finley Double Layer Flush Mount

Model# 5303-21

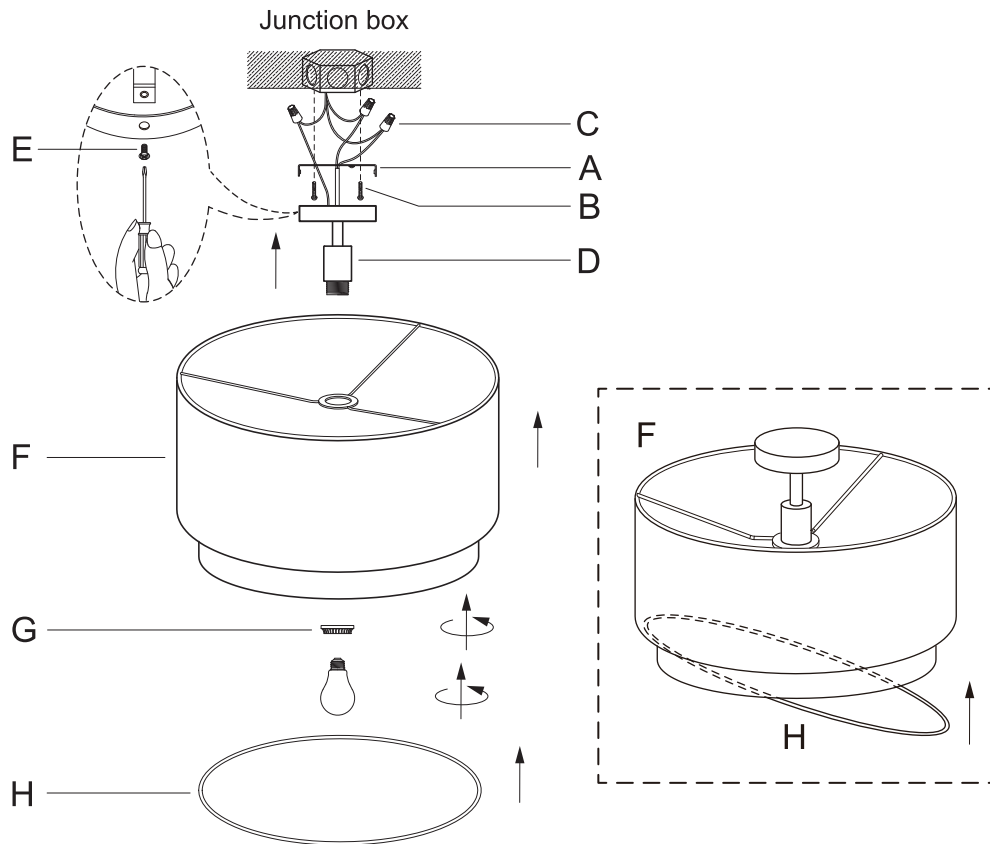

Professional installation recommended

1. Ensure power to the junction box is shut off. Gently pull wiring down from the junction box and allow it to hang.
2. Fasten the mounting plate (A) to junction box with screw (B).
3. Attach the copper ground wire from the canopy to the ground wire which in the junction box. Wrap connected wires with wiring cap (C) and turn it clockwise until tight.
4. Attach the ("+") electrical wire from the canopy to the ("+") electrical wire in the junction box (usually black). Attach the ("-") electrical wire from the canopy to the ("-") electrical wire in the junction box (usually white). Wrap connected wires with wiring cap (C) and turn it clockwise until tight.
5. Secure canopy (D) onto mounting plate (A) with screw (E) by using screwdriver.
6. Gently pull the inner bottom shade down so that it sits below the big outer shade.
7. Place the shade (F) onto the socket and tighten it with socket ring (G).
8. Install the bulb (not included), then insert the diffuser (H) at an angle into the bottom of the shade to complete assembly.

PARTS DIAGRAM

- | | |
|-------------------------|----------------------|
| (1)x Mounting plate (A) | (2)x Screw (E) |
| (2)x Screw (B) | (1)x Lamp shade (F) |
| (3)x Wiring cap (C) | (1)x Socket ring (G) |
| (1)x Canopy (D) | (1)x Diffuser (H) |

The parts (A), (E) and (G) are pre-assembled, please unscrew them before assembly.

GENERAL PRODUCT INFORMATION:

This product is suitable for dry locations only.

BULB TYPE: Use only with one type A Max 100W bulb (bulbs not included).

WARNING : Do not use cord in damp or wet conditions.

