


HUGO PENDANT

Model # 2137-12

BEFORE STARTING-SHUT OFF BREAKER AT MAIN DISCONNECT

Make sure all power is disconnected at existing fixture and that there no live wires in the junction box.

Not all junction boxes include simple wiring. If you are unsure or have doubts of electrical connection, call an electrician for assembly.

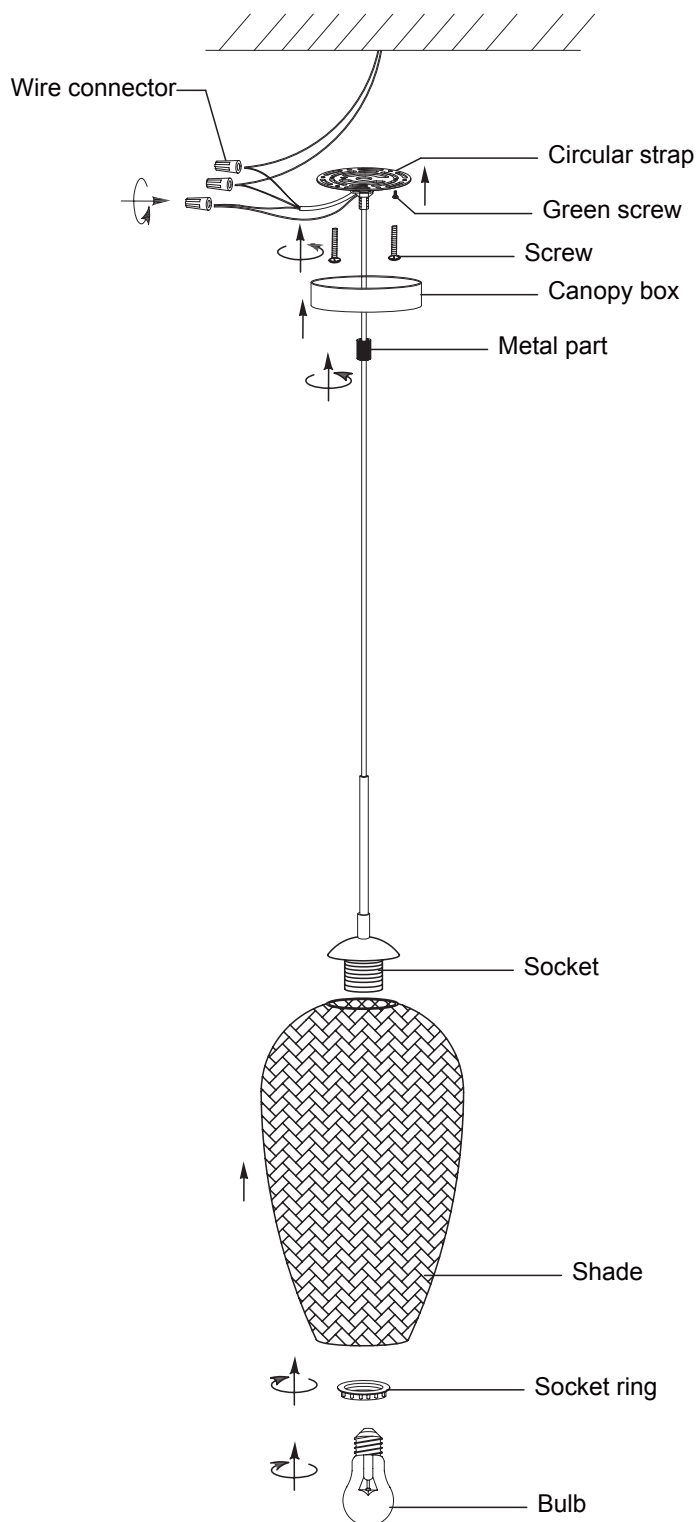

1. Connect the ground wire from the fixture to the ground wire from the Canopy. Connect the white wire from the fixture to the white wire (neutral wire) from the Canopy. Connect the black wire from the fixture to the black wire (live wire) from the Canopy. Cover the connection using the Wire Connectors. Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the Canopy

2. Socket ring comes pre-assembled to the socket. Before assembling the lamp shade, please unscrew this socket ring. Set lamp shade onto socket and tighten clockwise with socket ring to secure shade.

3. Install the bulb by screwing it into the socket

GENERAL PRODUCT INFORMATION:

This product is suitable for dry locations only.



IMPORTANT SAFETY INSTRUCTIONS:

This portable lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. **DO NOT ALTER THE PLUG.**

BULB TYPE: (1) 60Watt

PARTS DIAGRAM:

- 1) Wire connector
- 2) Screw