


CRYSTORAMA LIGHTING




ASSEMBLY INSTRUCTION MODEL #BRI-3005-SA



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

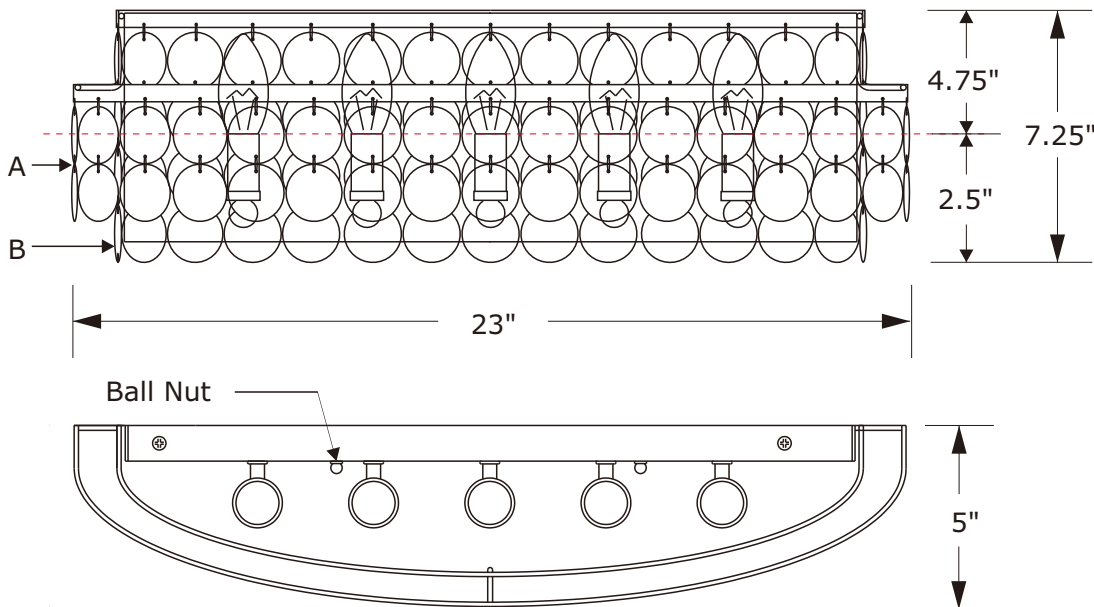

5 SPARE 2 HOLE CAPIZ SHELLS

2 SPARE 1 HOLE CAPIZ SHELLS

How to install the mounting plate

- 1.Put the mounting plate over the outlet box and mark the two points on the wall at the center of key holes.
- 2.Drill the holes at the marked points and insert the wall anchor inside the hole drilled.
- 3.Place the mounting plate over the outlet box and secure it with the machine screws, insert the wall anchor screws inside the wall anchors in the wall and tighten it.

How to Install

- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Install the backplate onto the outlet box, by securing it with the ball nuts.
- 3.Place the candle sleeve onto the socket, and insert recommended bulb (not included).
- 4.Dress the fixture with capiz shells "A"and "B" as illustrated.

Capiz Shell Sets


A.21 Sets.
(2)40mm

B.18 Sets.
(4)40mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

PART NUMBER MODEL #BRI-3005-SA

Part Number

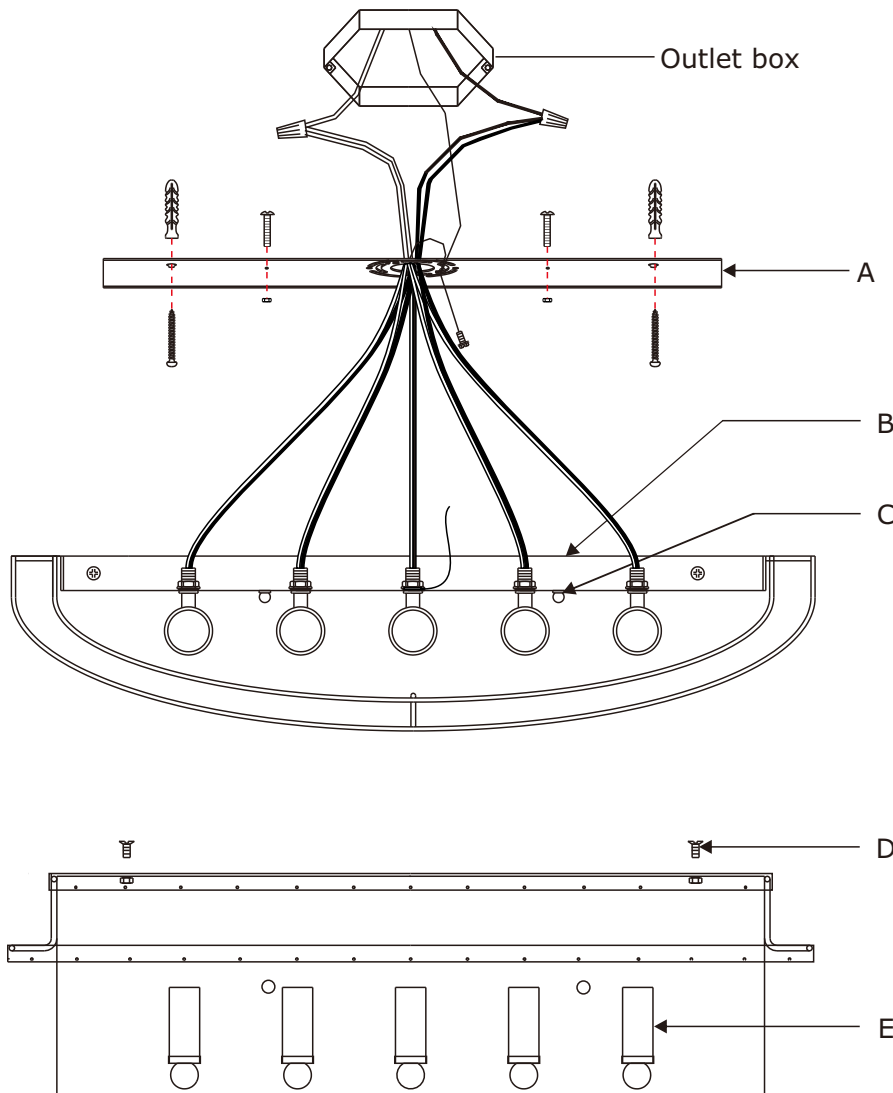

A. (1) - Mounting Hardware
include:

- (1) - Mounting Plate
- (2) - Wall Anchors
- (2) - Anchor Screws
- (2) - Machine Screws
- (3) - Wire Nuts

B. (1) - Backplate(W20",H6",E1") #XRE3005SABKP20IN

C. (2) - Ball Nut #XRE3002SABANUT

D. (2) - Flat Screw

E. (5) - Candle Sleeve(W0.87",H1.97") #XRE3002SACDL1.97IN