

CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL#HAT-478-BF-VG




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 8- Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Dry rated

How to install

1. Screw the threaded pipe into the coupling and secure with the hex nut.
2. Slide the tubing and the check ring over the threaded pipe and secure with the stem.
3. Determine the preferred hanging height and choose the correct length of rods needed.
4. Feed the wires through the rods and connect them together.
5. Slip collar ring and canopy over the rod assembly.
6. Slip mounting bar with swivel along wire and thread it into the top of the rod assembly.
7. Raise fixture up and attach mounting bar to the outlet box using two outlet box screws.
8. Slip canopy up along rods and over outlet box and secure with the collar ring.
9. Install the fabric shade onto the candle sleeve.
10. Install the bulb(not included) into the socket.

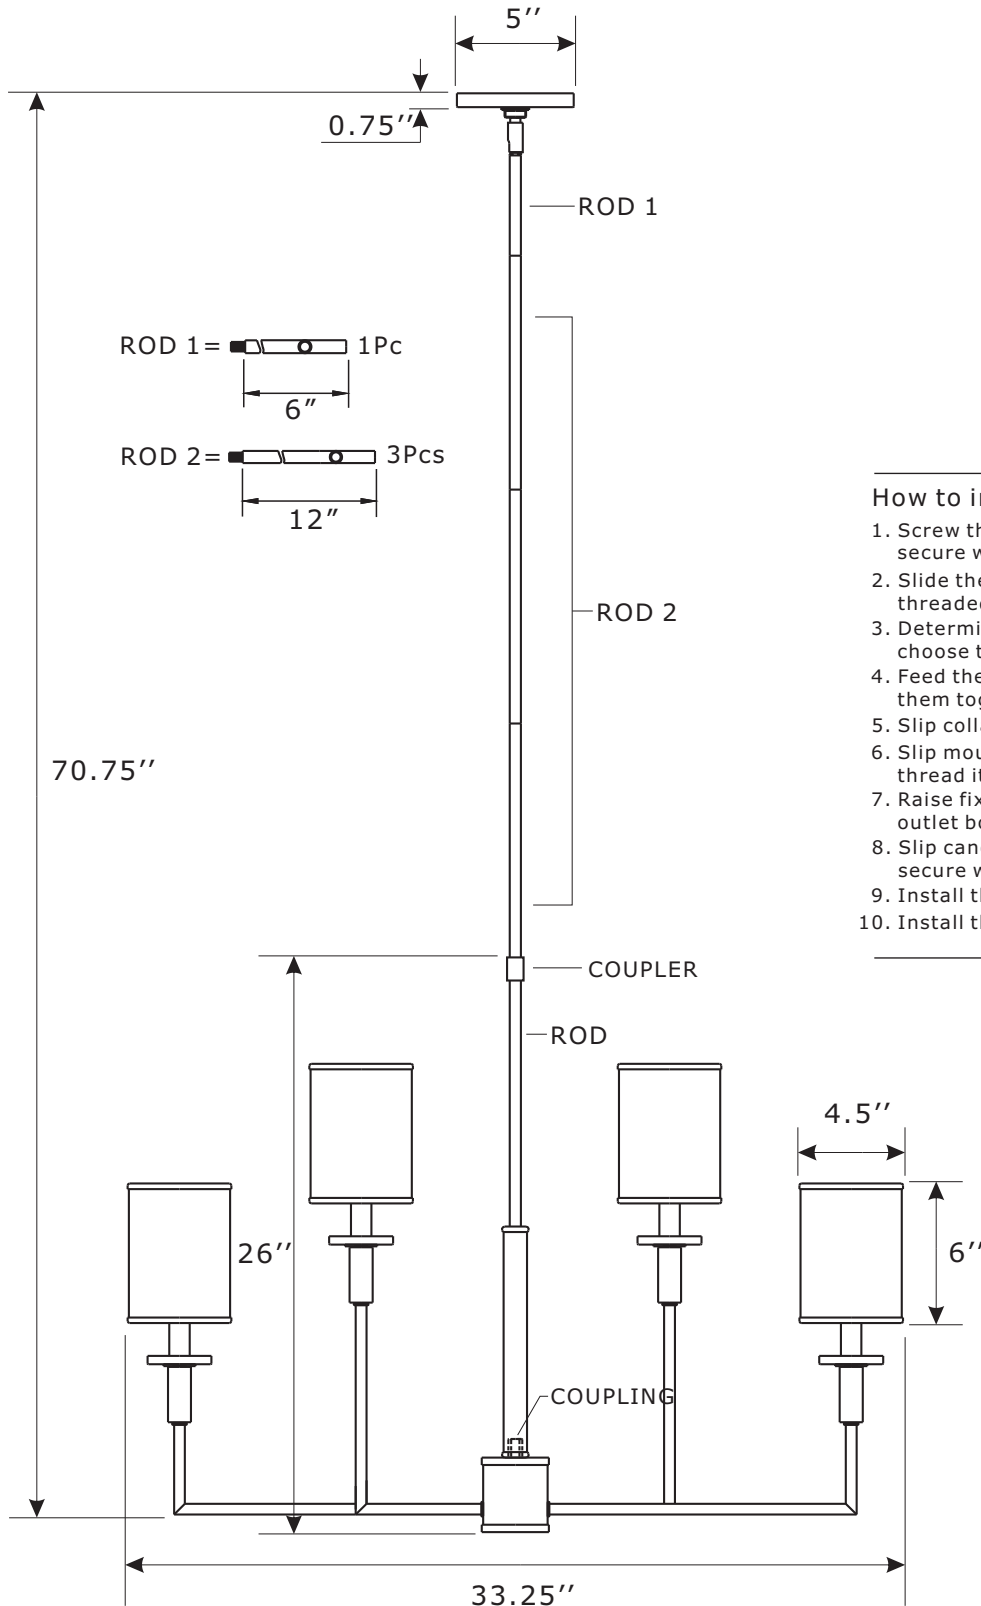

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5"xH5/8" #XRF478BFVGCAN5IN
- C. (1)-Rod D1/2"xL6" #XRF478BFVGRD6IN
- D. (3)-Rod D1/2"xL12" #XRF478BFVGRD12IN
- E. (1)-Coupler
- F. (1)-Stem D1/2"xL12"
- G. (1)-Check ring
- H. (1)-Tubing W1"xL9-7/8"
- I. (1)-Threaded pipe
- J. (1)-Hex nut
- K. (8)-Fabric shade #XRF471BFSHA4.375IN
- L. (8)-Candle sleeve W7/8"xL2-7/8" #XRF471BFVGCDL2.875IN

