



CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #DRA-8003-LG

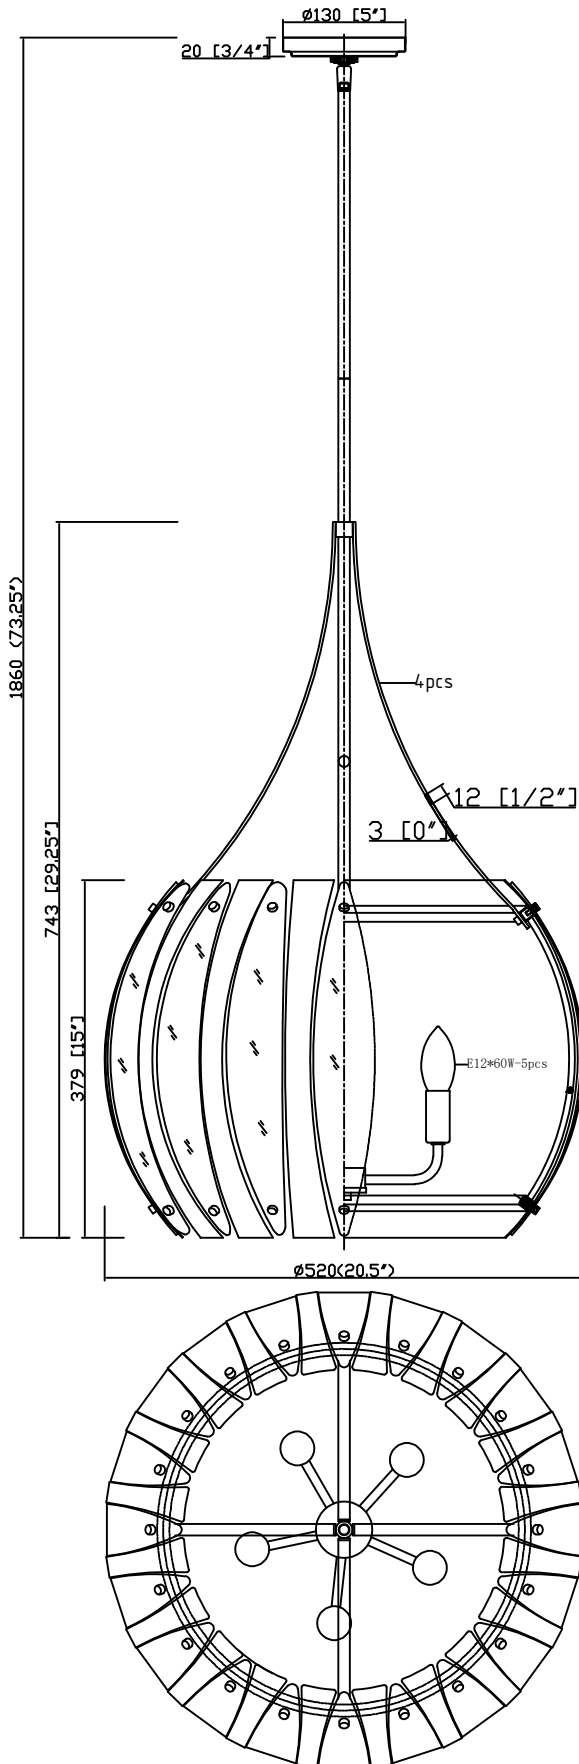

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5 - Cand. base Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS Damp RATED


How to Install

1. Pass the wires through the rods and screw them together. Screw the rod assembly onto the light cluster. Screw the scroll arm kit onto the rod.
2. Remove the finials from the inside ring of the frame. Place the scroll arm kit inside the frame to align the hole on the scroll arm end with the hole on the ring. Secure with the finials.
3. Decide the preferred hanging height and choose the correct length of rod needed.
4. Feed the wires through the rods, collar loop ring, canopy and swivel. Connect the rods together. Screw one end of rod assembly onto the top of the fixture and the other end onto the swivel.
5. Raise the fixture up to the ceiling. Install the mounting strap onto the outlet box and do the wire connection. Secure the canopy onto the mounting bracket using the collar loop ring.
6. Loosen the cap nuts from the frame (the cap nuts on the bottom of frame has the threaded nipple on it). Place one piece of the faux alabaster panel over the threaded nipple on the top of the frame and secure with the cap nuts. Align the hole on the bottom of the faux alabaster panel with the hole on the bottom frame and secure with the cap nuts with the threaded nipple. Repeat this for the rest of panels. Please do not overtighten the cap nuts to prevent the panel from breaking.



WARNING: This product can expose you to Lead which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

PART NUMBER MODEL #DRA-8003-LG

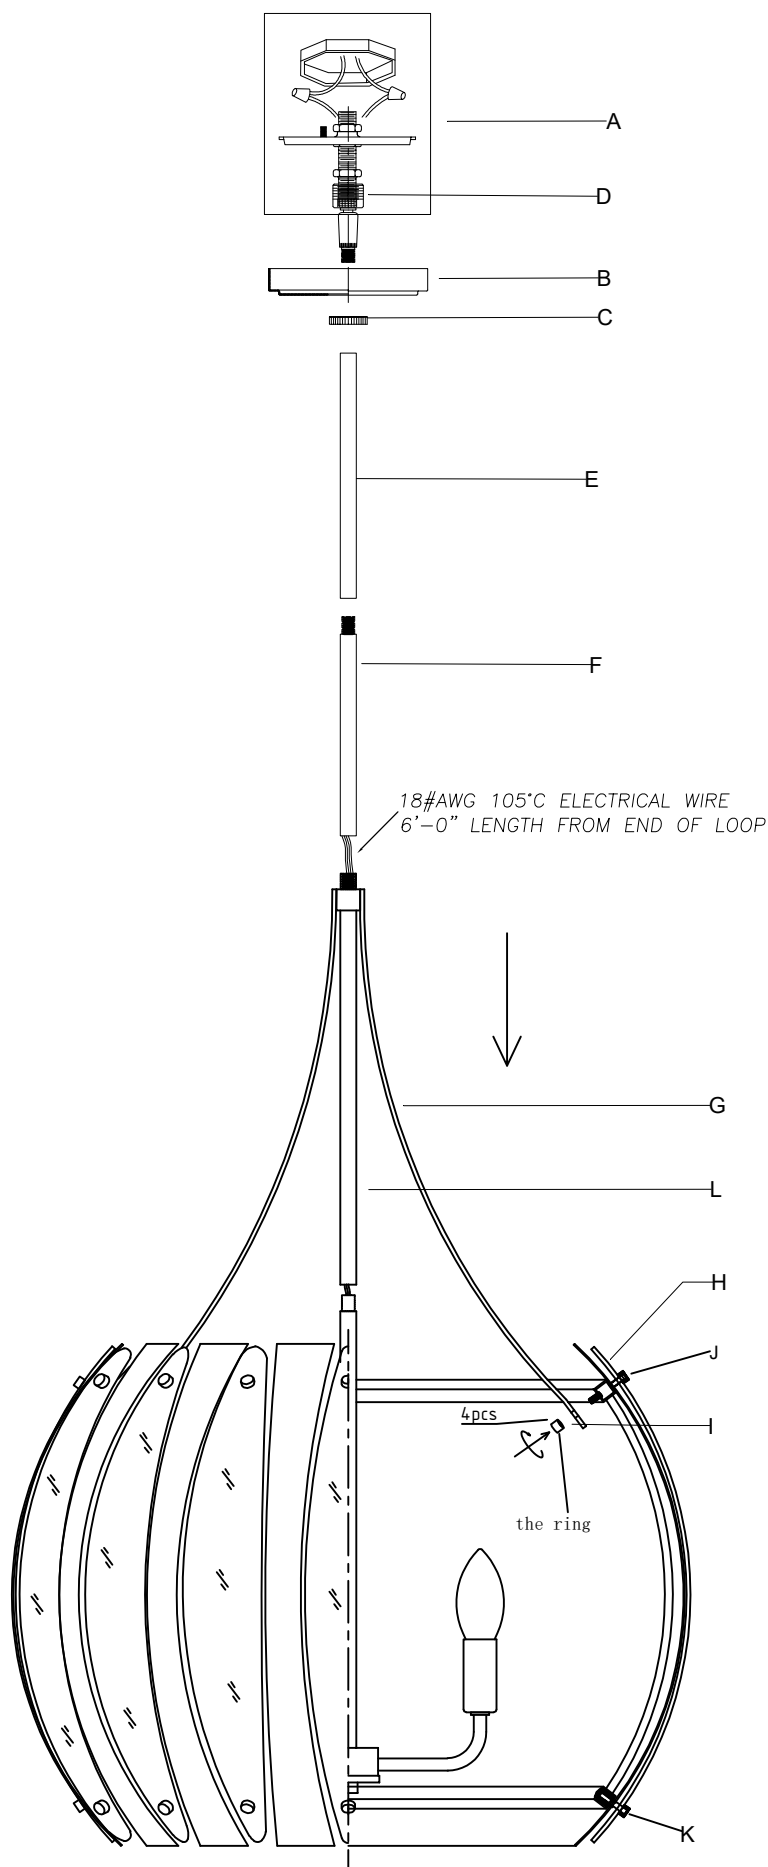


Part Number


Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR8003LGCAN5IN)
- C. (1)-Collar loop ring
- D. (1)-Swivel with collar loop
- E. (3)-Down rod 0.5"×12"
(XAR8003LGROD12IN)
- F. (1)-Down rod 0.5"×6"
(XAR8003LGROD6IN)
- G. (1)-Scroll arm kit
- H. (20)-Faux alabaster panel
- I. (4)-finial
- J. (20)-Cap nut
- K. (20)-Cap nut with threaded nipple
- L. (2)-Rod 0.5"×12.8"
(XAR8003LGROD12.8IN)

Installation Diagram for the Faux Alabaster Panel

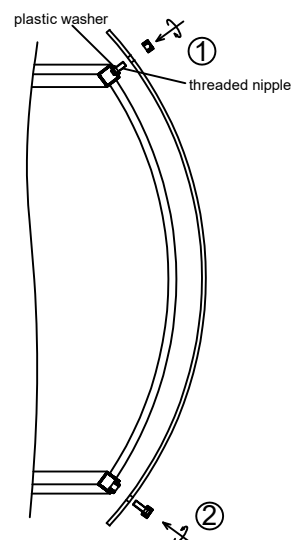

Assembly diagram for the Light Cluster

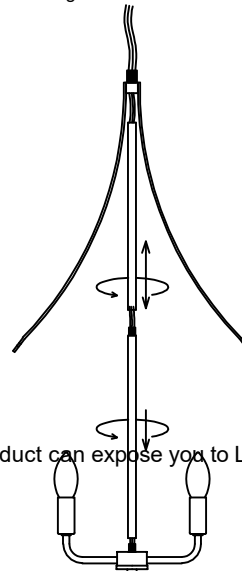

WARNING: This product can expose you to Lead,