


CRYSTORAMA LIGHTING

ASSEMBLY INSTRUCTION MODEL #ARA-10267-MK-ST



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



Includes (7) Dimmable G9 LED Bulbs
3.5 Watts Max
3000K, 400 Lumens, CRI 80

USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DRY RATED

How to install for hanging:


Please place the fixture frame on a soft cloth covered table before the installation.

When the fixture is intended to be installed with the shade facing down, please follow the step below:

1. Pull the end caps out of the frame bar by loosening the screws
2. Turn the end cap upside down to making the stud face downward, Insert the end cap back into the ends of the bar and secure with screws.
3. Turn the bar upside down to allow the stud to face upward.

1. Decide the preferred hanging height and choose the correct length of rods needed.
2. Slip the wires through the stems and connect them together. Screw one end of the stem assembly onto the top of the frame and the other end onto the swivel on the canopy.
3. Place the mounting plate over the outlet box and mark four points at the center of the holes on the mounting plate.
4. Drill the holes at the marked points and insert the wall anchors into the hole. Place the mounting plate over outlet box and secure with the anchor screws.
5. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy over the outlet box with the cap nuts.
6. Slide the rubber washer over the socket, and place the stone shade and check ring over the socket and secure it with the socket ring using the wrench.
7. Install the G9 led bulb into the socket.

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

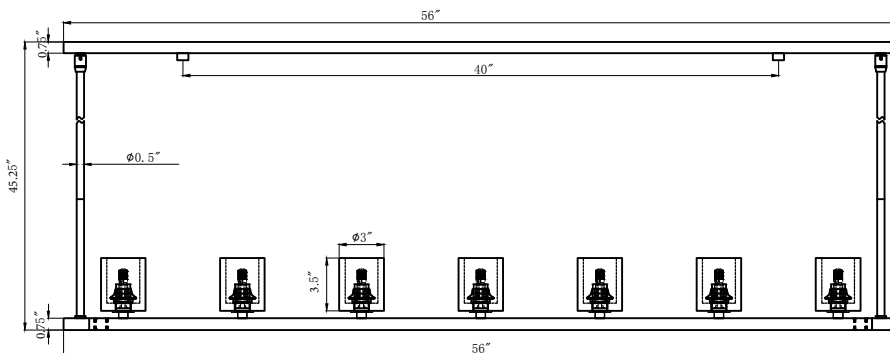

CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #ARA-10267-MK-ST

Part Number

Part Numbers

- A. Mounting Hardware
 - (1) Mounting Plate
 - (2) Wire Nut
 - (2) Outlet Box Screw
 - (4) Wall anchor and screw
- B. (1) Canopy L56" * W4 3/16" * H3/4"; XME10267MKCAN56IN
- C. (2) Cap nut
- D. (6) Rod W1/2" * H12"; XME10267MKROD12IN
- E. (2) Rod W1/2" * H6"; XME10267MKROD6IN
- F. (1) Fixture frame
- G. (7) Rubber washer
- H. (7) Stone Shade W3" * H3 9/16"; XME10264STONE3IN
- I. (7) Check ring
- J. (7) Socket ring
- K. (7) LED Bulb
- L. (1) Wrench
- M. (1) Wrench

