



ASSEMBLY INSTRUCTION MODEL #ZAN-9013-SG



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate Local electrical codes.

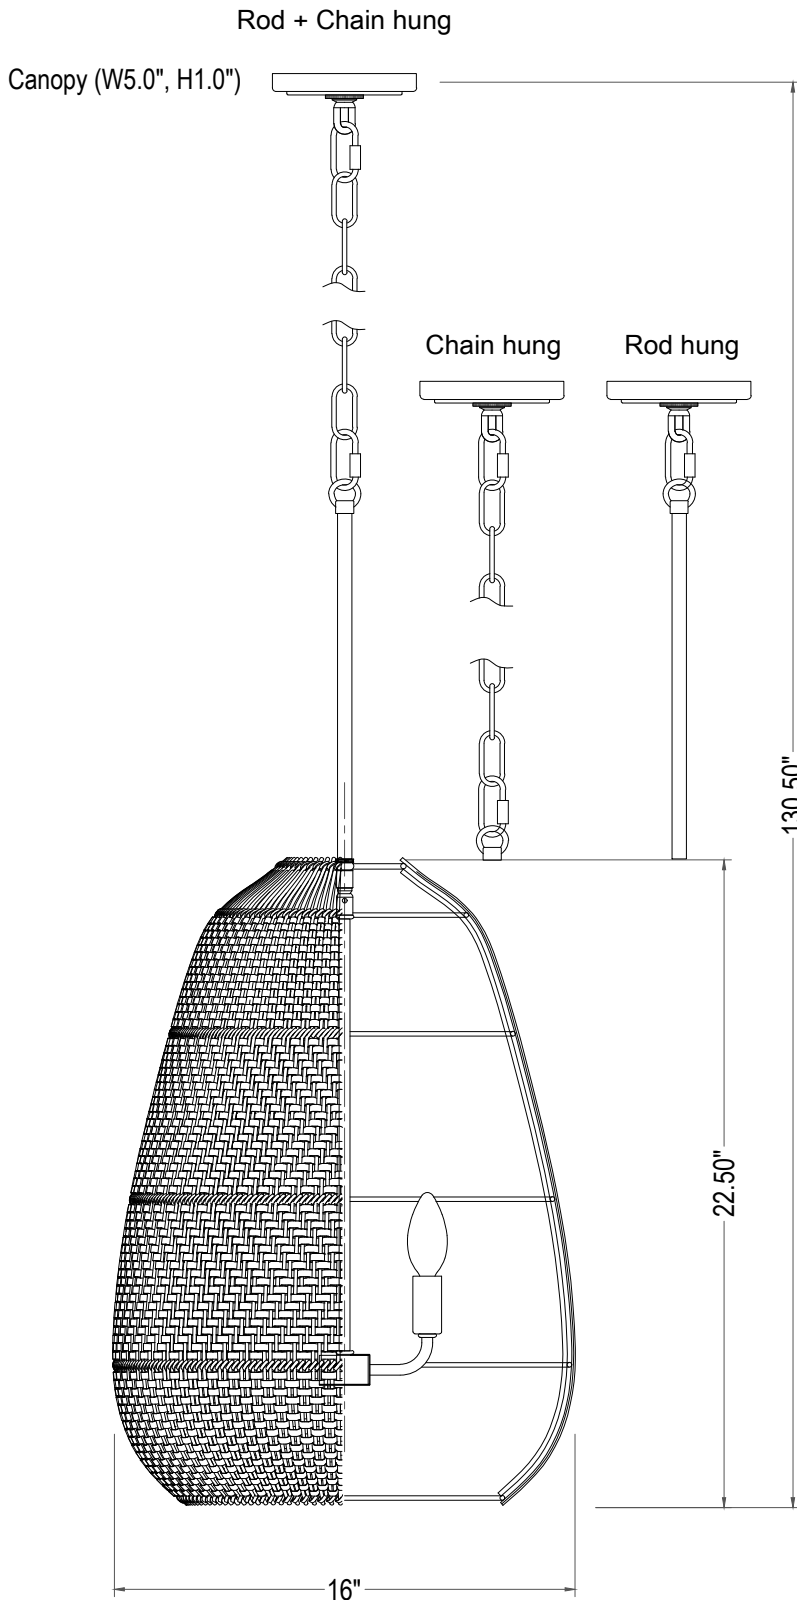

You will need 3 -Candelabra Base Bulb

40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

For rod hung

1. Decide the preferred hanging height and choose the correct rod length needed.
2. Feed the wire through the rods and connect them together. Screw one end of the rod assembly onto the top of the fixture. Screw the loop onto the other end of the rod assembly and connect it to the collar loop using the quick link.


For rod + chain hung

1. Decide the preferred hanging height and choose the correct rod and chain length needed.
2. Feed the wire through the rods and connect them together. Screw one end of the rod assembly onto the top of the fixture and screw the loop onto the other end. Using the quick links, attach one end of the chain to the collar loop and the other to the loop on the rod assembly.

For chain hung


1. Decide the preferred hanging height and choose the correct chain length needed.
2. Screw the loop onto the top of the fixture.
3. Feed the wire through the chain links. Using the quick links, attach one end of the chain link to the collar loop and the other end to the loop.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

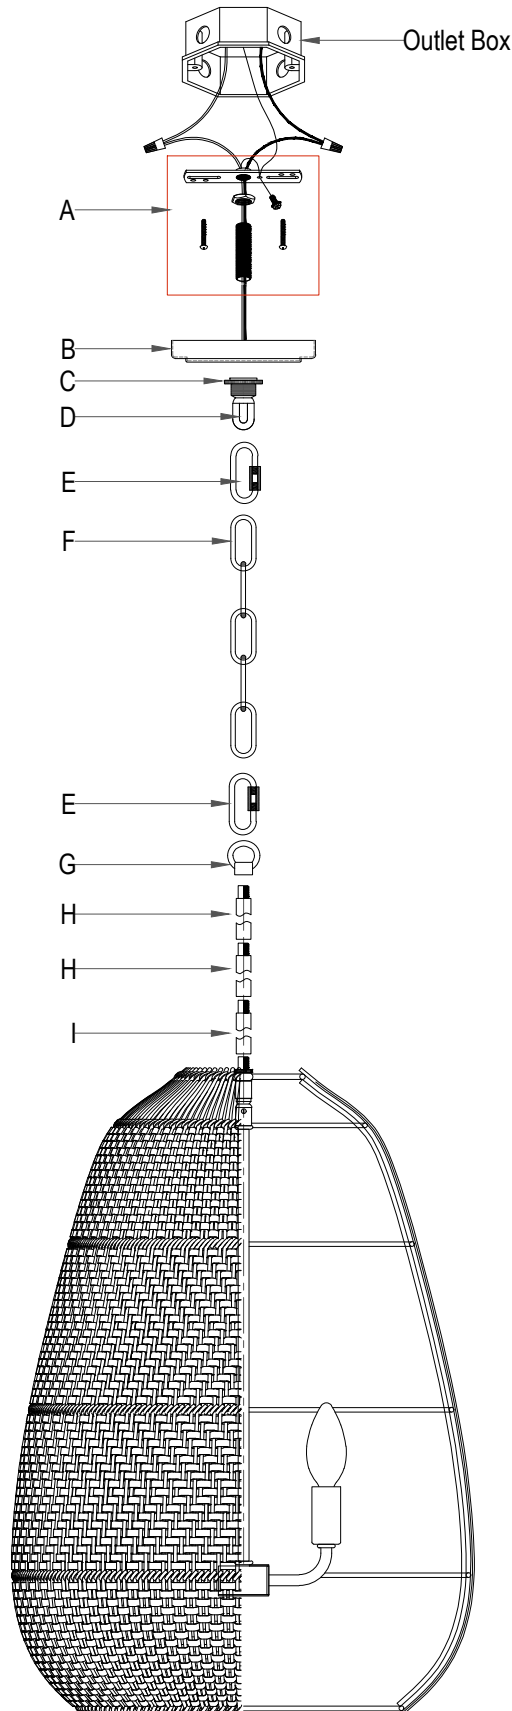

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.0",H1.0") #XLF9003SGCAN5IN
- C. (1) - Collar Ring
- D. (1) - Collar Loop
- E. (2) - Quick Link(5mm)
- F. (1) - Hanging Chain(72",4.5mm) #XLF9003SGCHA4.5MM
- G. (1) - Loop - #XLF9003SGLLOOP
- H. (2) - Rod(D0.5",L12") #XLF9003SGROD12IN
- I. (1) - Rod(D0.5",L6") #XLF9003SGROD6IN

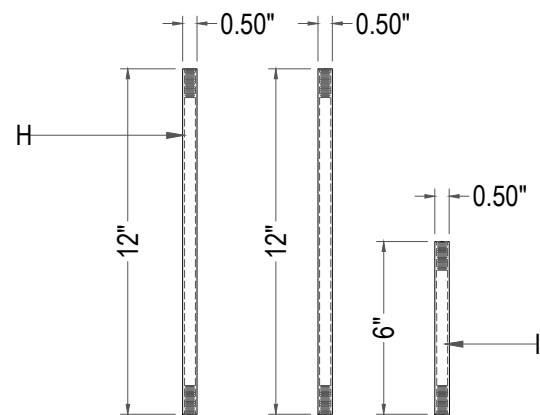

Optional