




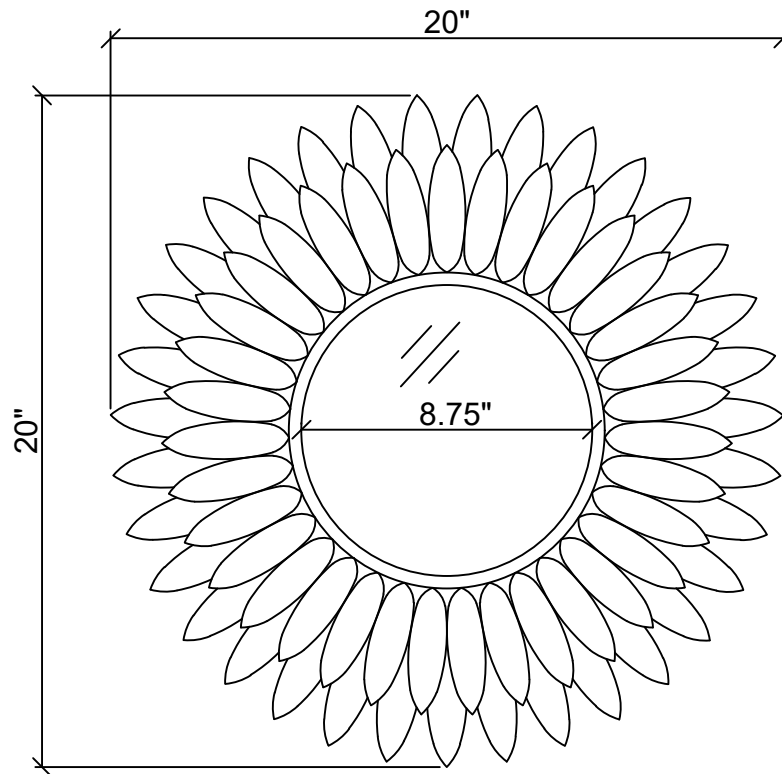

When removing the mirror from the box, please gently hold and lift from the outermost leaf ONLY.

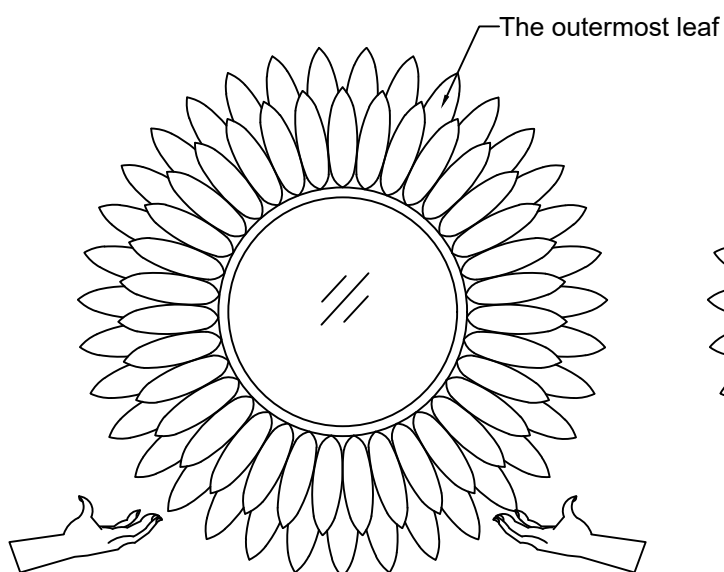

FRONT VIEW

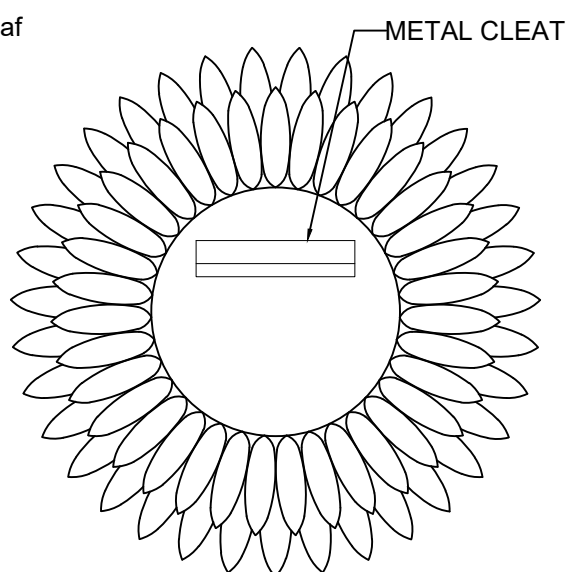

BACK VIEW

INSTALLATION INSTRUCTIONS

ITEMS INCLUDED





Anchor(A):  Ø7.5[mm]x36[mm]x2 Wall cleat:



Screws(B):  Ø4[mm]x40[mm]x2

NECESSARY TOOLS (NOT INCLUDED)

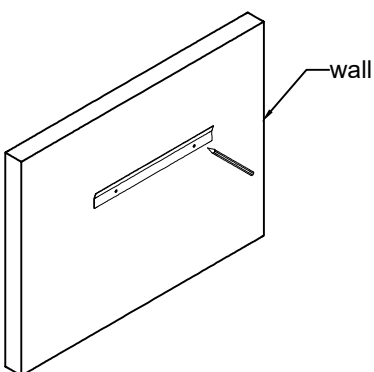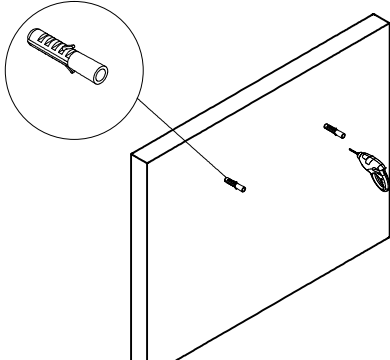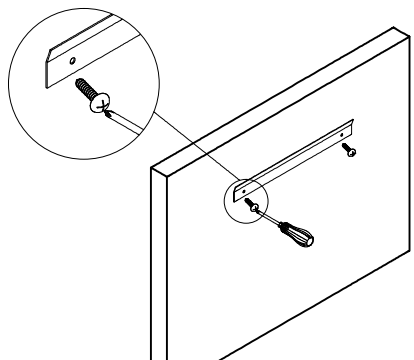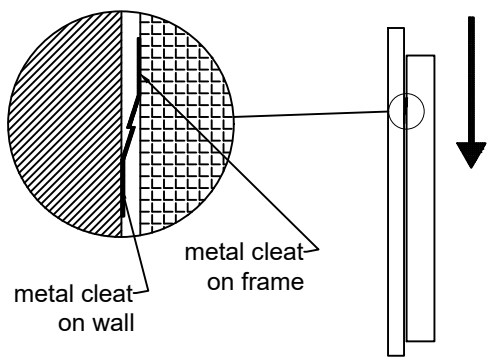

	Step 1 Place the metal cleat at the desired wall location and mark three points at the center of the hole on the metal cleat using the pencil.
	Step 2 Drill the holes at the marked points and insert the anchors into the hole.
	Step 3 Mount the metal cleat onto the wall surface using the screws supplied. Make sure that the metal cleat is straight using a level.
 metal cleat on wall metal cleat on frame	Step 4 Gently hold the outermost leaf of the mirror and hang it onto the metal cleat.