



CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #WIN-617-GA-CL-MWP

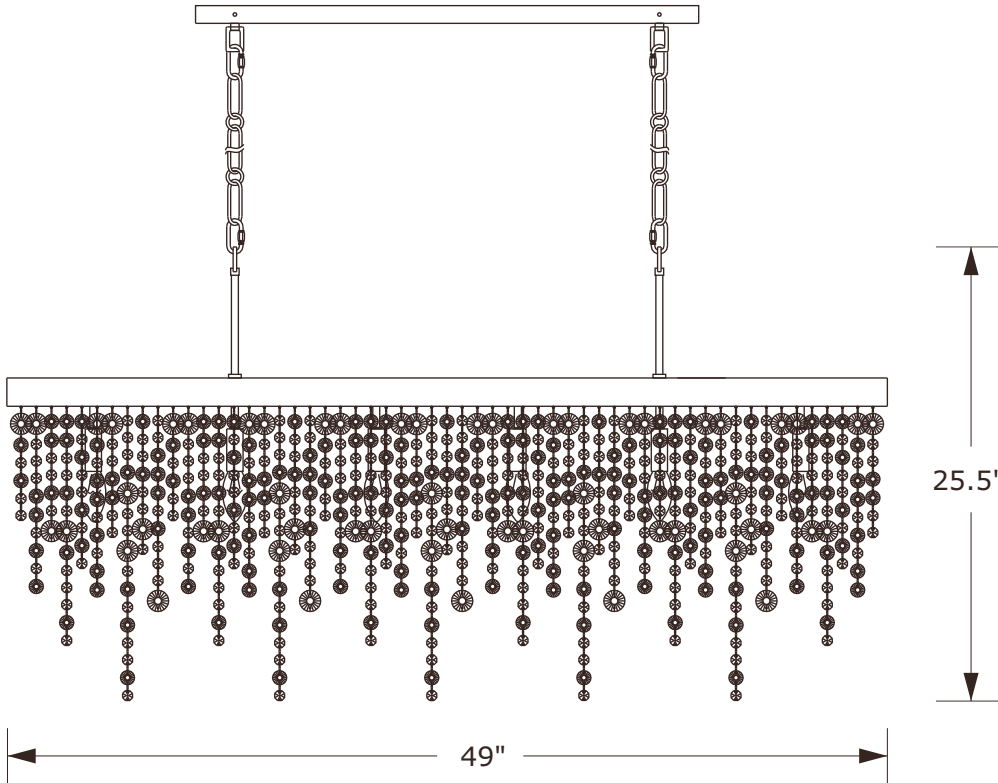


DETAILED ILLUSTRATION

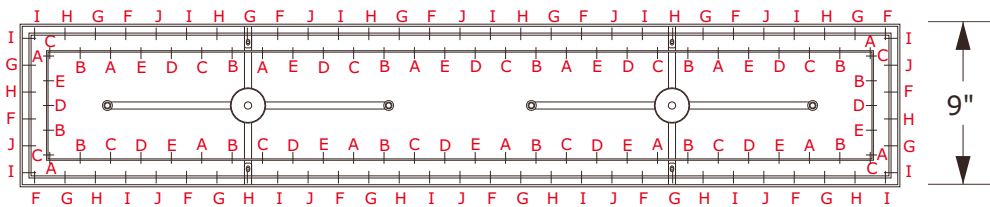

SUGGESTED CRYSTAL PLACEMENT TOP VIEW
PLEASE REFERENCE CRYSTAL KEY

The minimum hanging height:

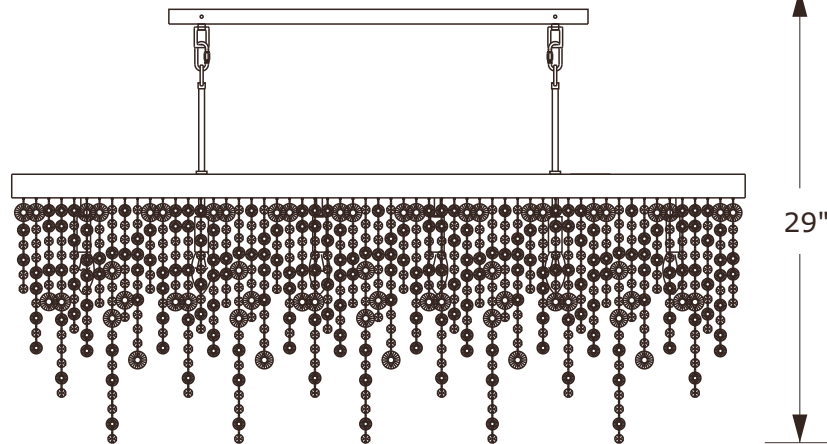

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

How to Install


- 1.Determine preferred hanging height and adjust to the required chain.
- 2.On both sides, feed wires through the hanging stem and chain.
- 3.Attach the stem onto the fixture body.
- 4.On each piece of chain, hang one end at the loop on canopy and the second end at the loop on the top of stem.
- 5.Insert recommended bulb (not included).
- 6.Dress the crystal strands as illustrated.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA LIGHTING




PART NUMBER MODEL #WIN-617-GA-CL-MWP

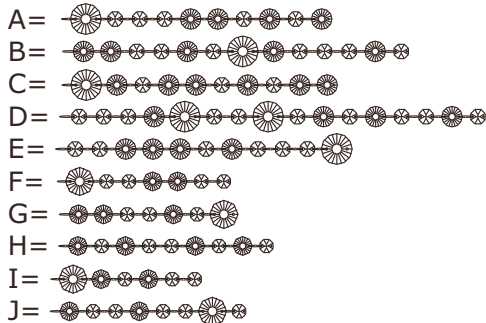

Crystal Key

A.14 Sets. (5)14mm + (4)20mm + (1)30mm	G.14 Sets. (3)14mm + (3)20mm + (1)30mm
B.14 Sets. (7)14mm + (5)20mm + (1)30mm	H.14 Sets. (5)14mm + (4)20mm
C.14 Sets. (3)14mm + (6)20mm + (1)30mm	I.16 Sets. (3)14mm + (2)20mm + (1)30mm
D.12 Sets. (10)14mm + (4)20mm + (2)30mm	J.12 Sets. (5)14mm + (2)20mm + (1)30mm
E.12 Sets. (6)14mm + (4)20mm + (1)30mm	
F.14 Sets. (4)14mm + (2)20mm + (1)30mm	

Part Number

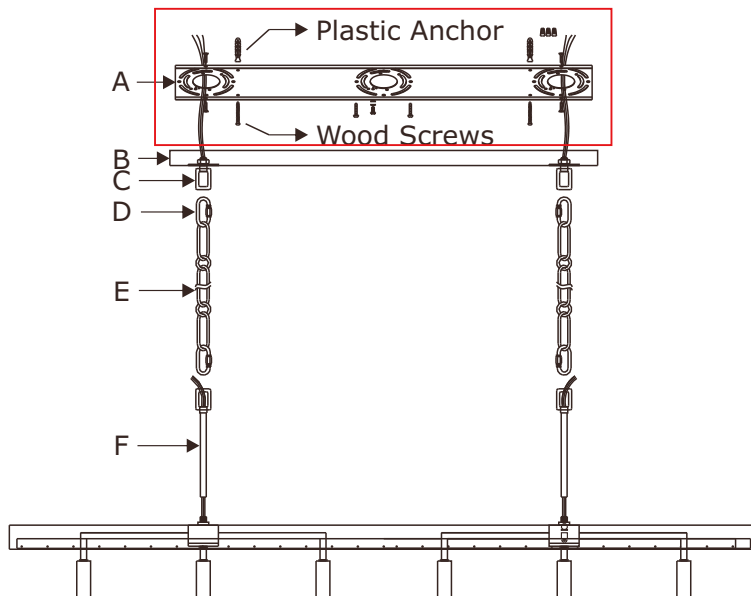

A. (1) - Mounting Hardware
include:

- (1) - Mounting Plate
 - (4) - Machine Screw
 - (3) - Wire Connector
 - (2) - Plastic Anchor
 - (2) - Wood Screw
- B. (1) - Canopy(L28",W4.5",H0.75") #XRE617GACAN28IN
 C. (4) - Fixture Loop
 D. (4) - Quick Link
 E. (2) - Hanging Chain(each72",5.0mm) #XRE617GACHA5MM
 F. (2) - Hanging Stem(6",12.7mm) #XRE617GASTEM6IN

For installation of mounting plate:

- 1.Please measure the distance between the two mounting keyholes on the mounting plate.
- 2.Make two points on the ceiling according to the distance measured above.
- 3.Drill two holes at the two points and insert the plastic anchors.
- 4.Put the mounting plate over outlet box and insert two wood screws in the plastic anchors and tighten them.