

CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #SIM-805-MK-TG




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3 – Cand. Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS WET RATED

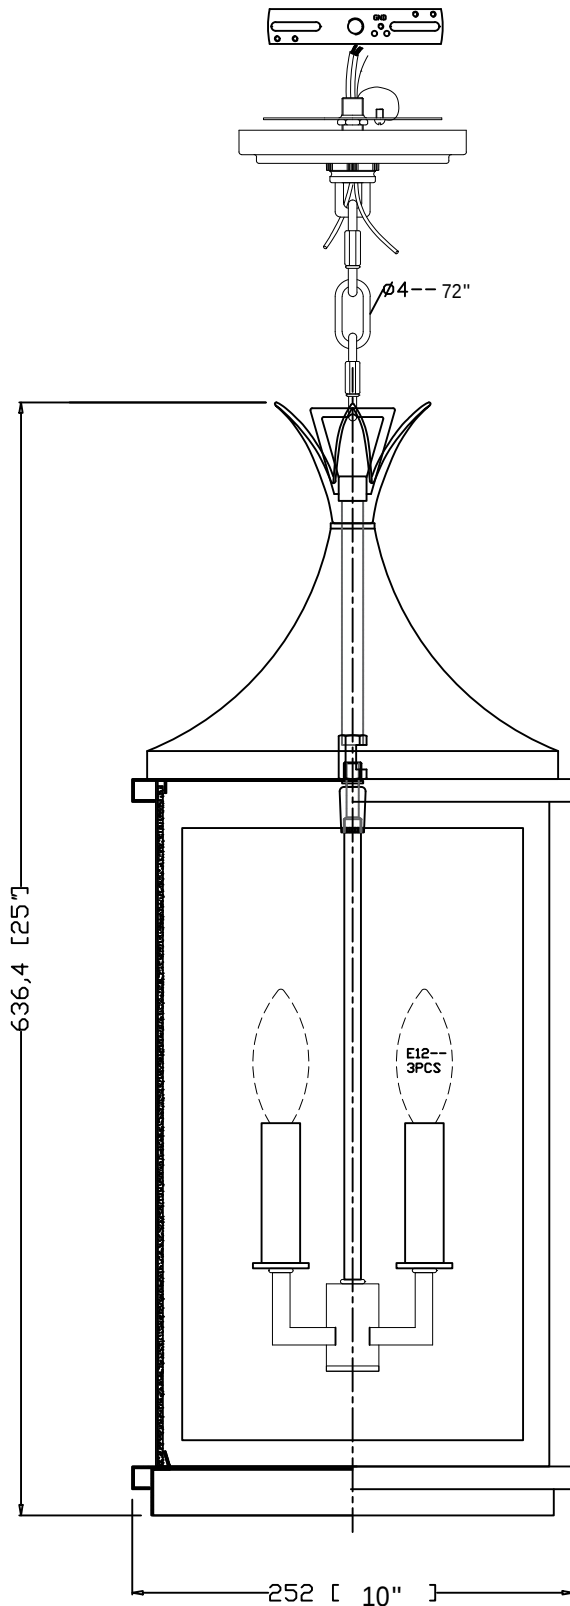

How to Install

1. Install the bulb onto the socket.
2. Insert the glass panel from the bottom of the frame to allow the top of the glass to be seated inside the groove on the top of frame. Secure the glass with the clips on the bottom of the frame.
3. Install the mounting bar onto the outlet box using two outlet box screws.
4. Decide the preferred hanging height and choose the correct length of chain needed.
5. Raise the frame up to the ceiling and do the wire connections. Place the canopy over the mounting bar and secure with the collar loop ring




WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy XAR805MKCAN5IN
- C. (1)-Collar Loop ring
- D. (1)-Screw collar loop
- E. (1)-Chain Ø4.0*72" XAR805MKCHA4MM
- F. (1)-Fixture loop
- G. (1)-Frame
- H. (3) -~~Candle Sleeve~~ XAR803MKCDL3.125IN
- I. (4)-Glass Panels; W8.25"H15.25"
XAR803GLA15.25IN
- J. (1)-Swivel(max degree is 15°)

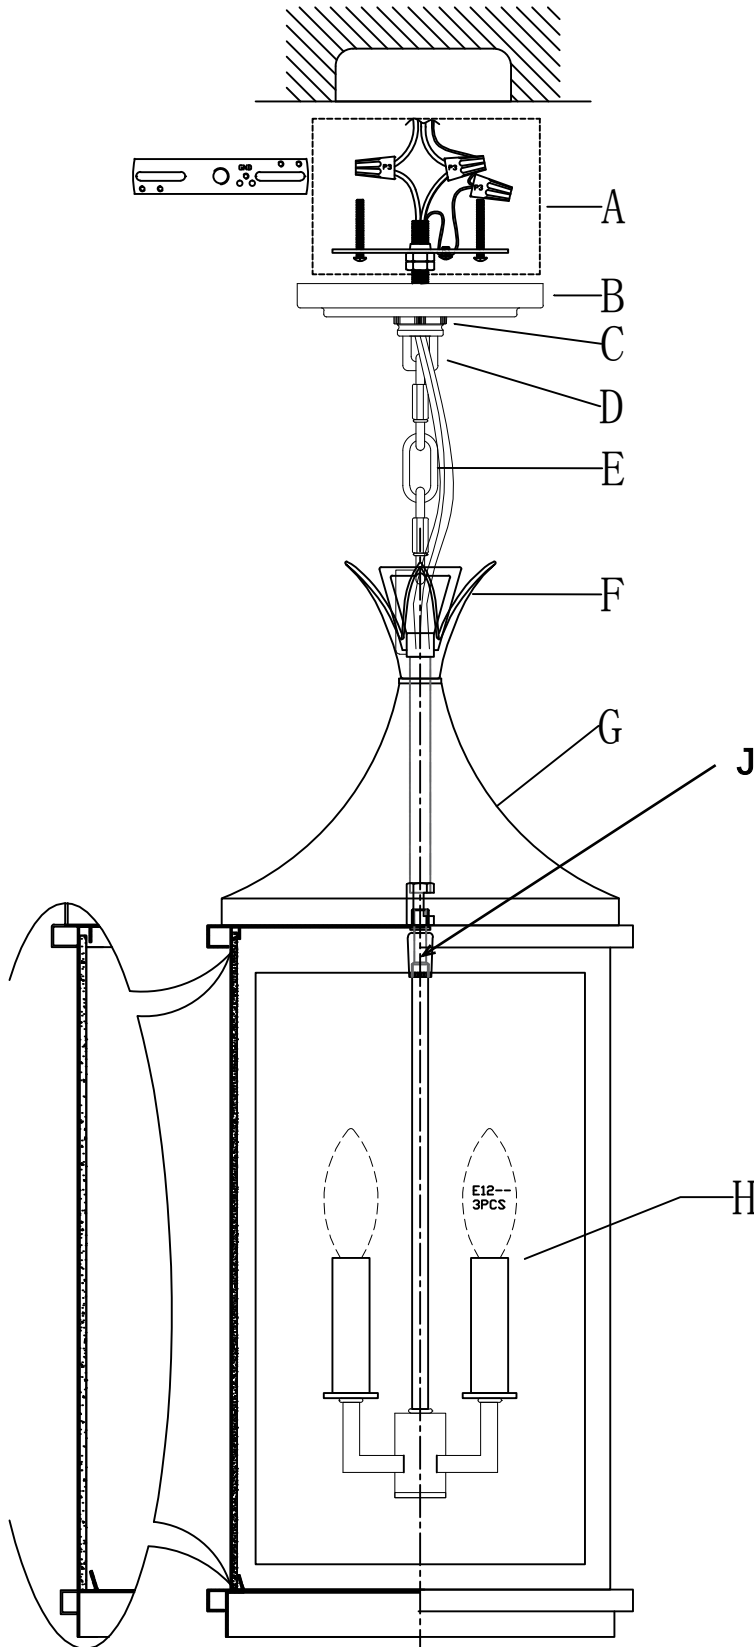

GLASS
4pcs

-I

