


ASSEMBLY & INSTALLATION INSTRUCTIONS

A995

Brutus Pendant Large 401311

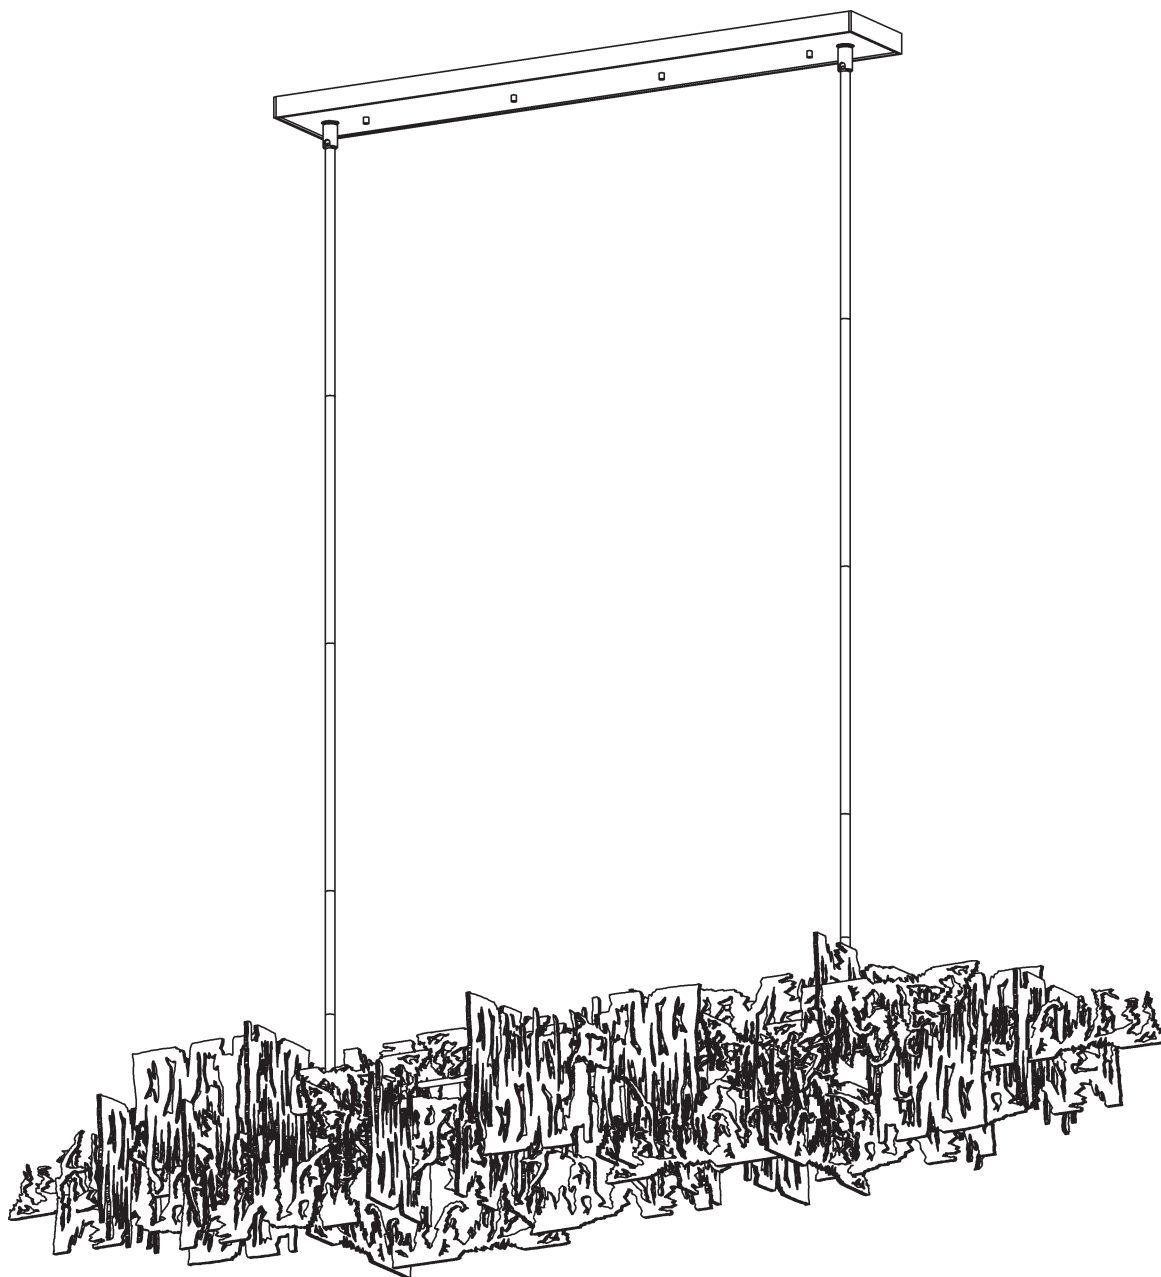

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

55945

1 OF 7

Component Parts

- A Fixture**
- B Fixture Coupling (2)**
- C 3" Fixture Pipe (2)**
- D 6" Fixture Pipe (2)**
- E 12" Fixture Pipe (6)**
- F Stem Nipple (12)**
- G Bracket (2)**
- H Swivel (2)**
- I Canopy**
- J #10 Wood Screw (8)**
- K Anchor (4)**
- L Ground Screw**
- M Cupped Washer**
- N Cover Plate**
- O Hex Nut (8)**
- P Threaded Standoff (4)**
- Q Knob (4)**
- R Socket (6)**
- S Bulb (6) - not included**



ASSEMBLY & INSTALLATION INSTRUCTIONS

A995

Brutus Pendant Large 401311

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

ASSEMBLE AND ATTACH FIXTURE PIPES TO FIXTURE (Figure 1 - on following page)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture (A) from the carton.
2. Locate fixture pipes (C, D, E), fixture (A), and stem nipples (F). Nipples (F) can be found in the kit bag.
3. Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture couplings (B) through the individual components. Wires will slip easier through loose components than through pipes that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and nipples.

		Overall Height of Fixture														
		13.8	16.8	19.8	22.8	25.8	28.8	31.8	34.8	37.8	40.8	43.8	46.8	49.8	52.8	55.8
# of Pipes Required	3" Pipe	1		1		1		1		1		1		1		1
	6" Pipe		1	1			1	1			1	1			1	1
	12" Pipe				1	1	1	1	2	2	2	2	3	3	3	3

4. Apply a drop of the supplied thread locking compound to the internal threads of the fixture coupling (B).

NOTE: APPLICATION OF THE THREAD LOCKING COMPOUND IS NECESSARY TO PREVENT THE PIPE FROM LOOSENING DURING REGULAR MAINTENANCE AND CLEANING OF THE FIXTURE. BE CERTAIN TO APPLY THE COMPOUND.

5. Screw assembled pipes, into fixture couplings (B).
6. Complete instructions on following pages to mount canopy.




HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

55945

3 OF 7

Brutus Pendant Large 401311

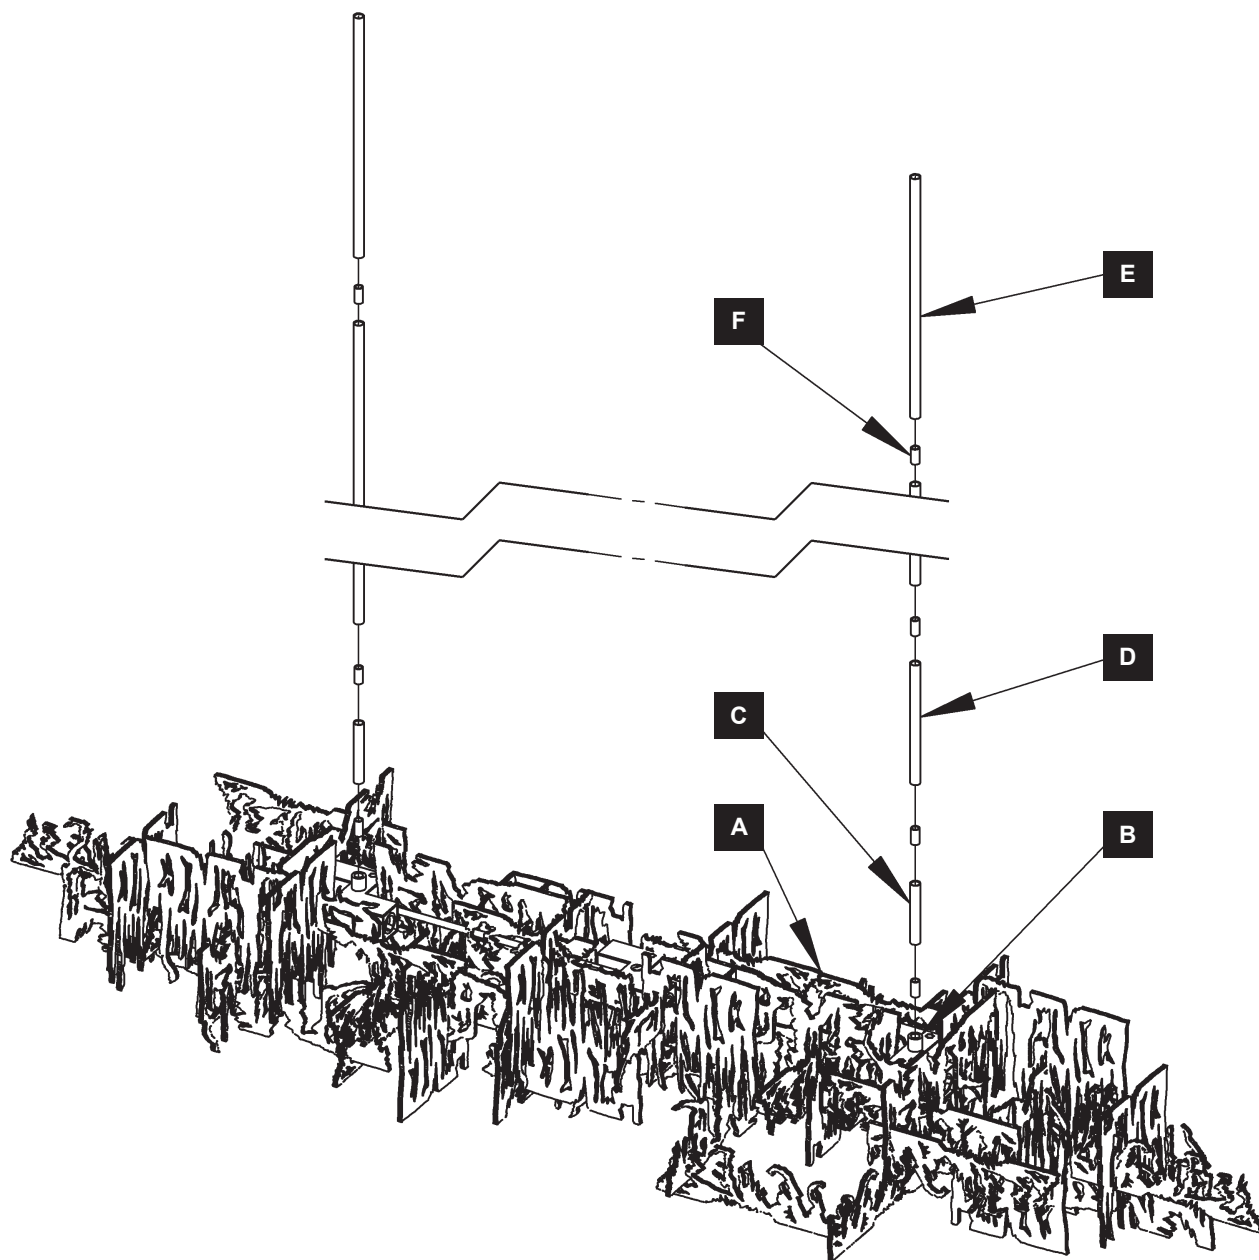

(Figure 1)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

Brutus Pendant Large 401311

ATTACH CANOPY TO CEILING (Figure 2)

1. Carefully unpack fixture (A) from the carton.
2. Remove knobs (Q) from canopy (I) and remove cover plate (N). Retain for later step.
3. Locate canopy (I). Canopy (I) will need to be secured to a structural member in the ceiling. For additional holes needing anchors, place canopy (I) over the electrical box. Line up holes in canopy with holes in electrical box. With a pencil, mark the location of mounting holes needing anchors on ceiling. Set canopy (I) aside.
4. Drill 1/4" holes in the locations marked on the ceiling. Place the tapered end of the anchors (k) into the holes and gently tap them flush to the ceiling using a light weight hammer.
5. Thread the wires in the electrical box through the hole in canopy (I) while moving into position. Using two machine screws (not provided) fasten canopy (I) to the electric box.


Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

6. Using #10 screws (J), canopy (I) to a structural member in the ceiling.

Note: Wood screws are supplied with your fixture; however, different materials and/or construction methods may require different fasteners. If in doubt, contact a qualified electrician.

Caution: Do not rely on anchors or electrical box alone to suspend fixture. Fixture must be attached to a structural member in the ceiling.

7. Install #10 screws (J) into remaining holes with anchors (K). Be sure not to overtighten and strip anchors (K).
8. Follow instructions on page 6 & 7 to complete install.

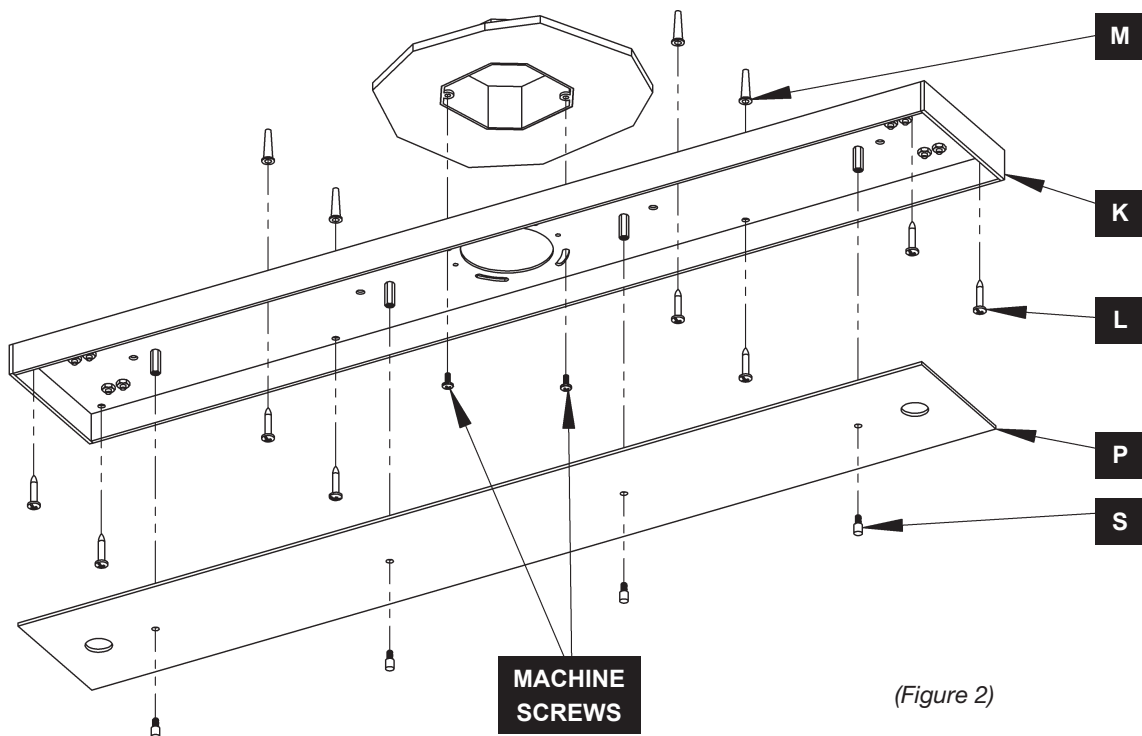

(Figure 2)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

ASSEMBLY & INSTALLATION INSTRUCTIONS

A995

Brutus Pendant Large 401311

TO COMPLETE INSTALL (Figures 3 & 4)

CAUTION: DUE TO FIXTURE WEIGHT, THIS SECTION WILL REQUIRE AT LEAST TWO PEOPLE.

1. Slide cover plate (N) over wires and assembled pipes until it rests on fixture (A).
2. Slide swivels (H) with attached brackets (G) over wires and thread into fixture pipe.
3. Raise fixture (A) towards canopy (I). Slip brackets (G) over studs and secure with (4) hex nuts (O) per bracket.
4. Attach a pigtail lead to the canopy (I) using provided ground screw (L) and cupped washer (M), found in kit bag.
5. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black). Holding cover plate (N) close, connect all ground wires (bare copper or green to bare copper or green) together.

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.


6. Raise cover plate (N) and secure with knobs (Q) into threaded standoffs (P).

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN COVER PLATE AND THE CANOPY

7. Install bulbs (S) into sockets (R). (Figure 4)

Note: Designer preference is to have a longer T bulb in each end socket.

8. Restore electricity at main breaker.

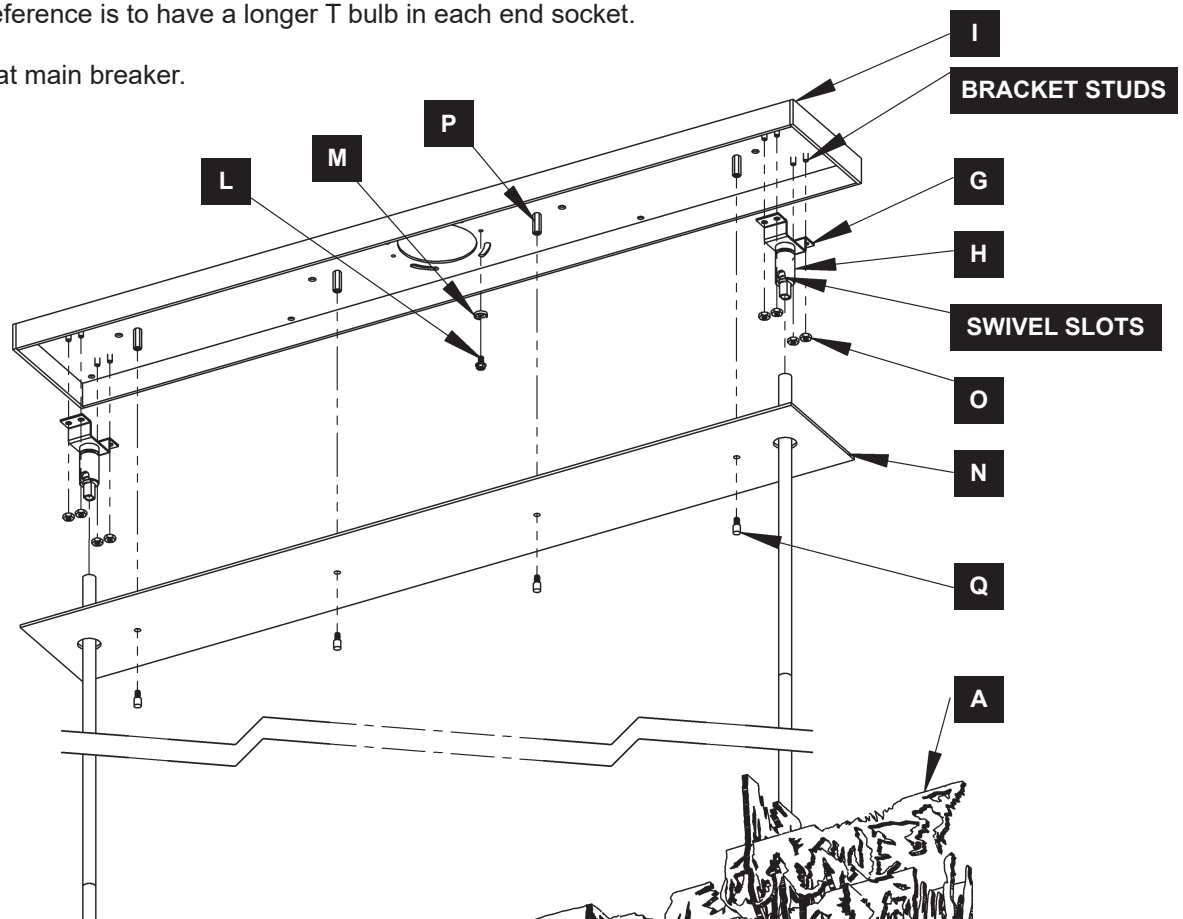


(Figure 3)

ASSEMBLY & INSTALLATION INSTRUCTIONS

A995

Brutus Pendant Large 401311

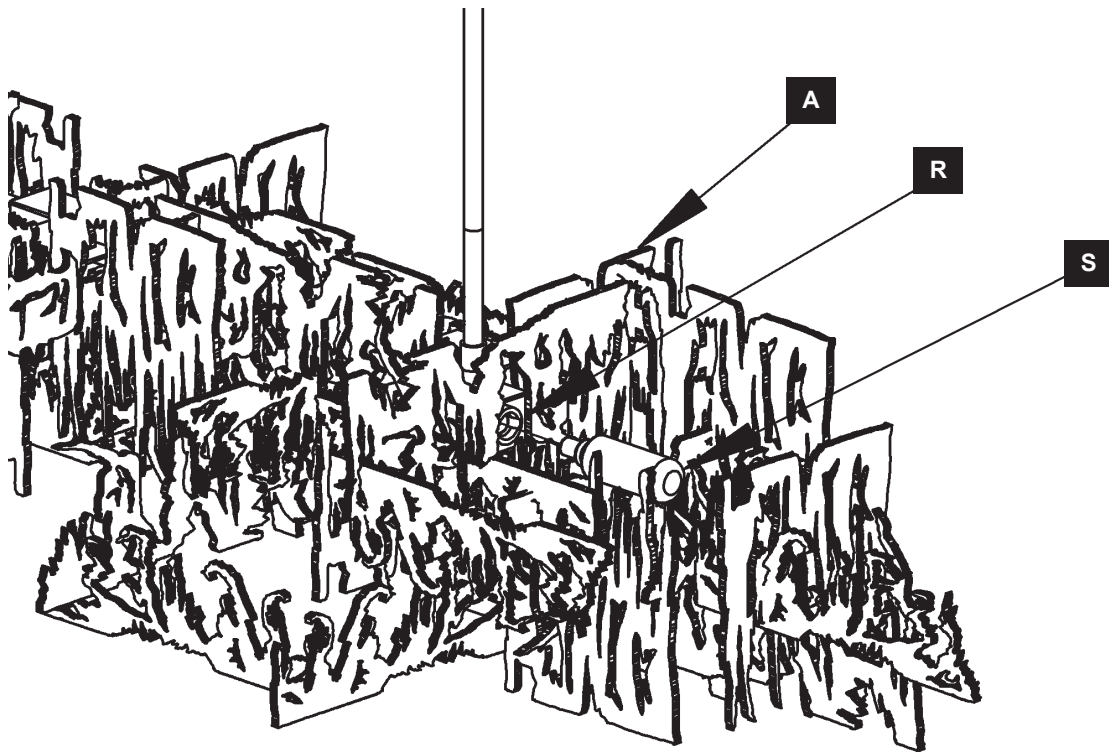

(Figure 4)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product.
We hope you enjoy your fixture!

**** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.***



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM