


ASSEMBLY & INSTALLATION INSTRUCTIONS

A632

126712 & 126732 Semi-flush Leaf

CONTENTS

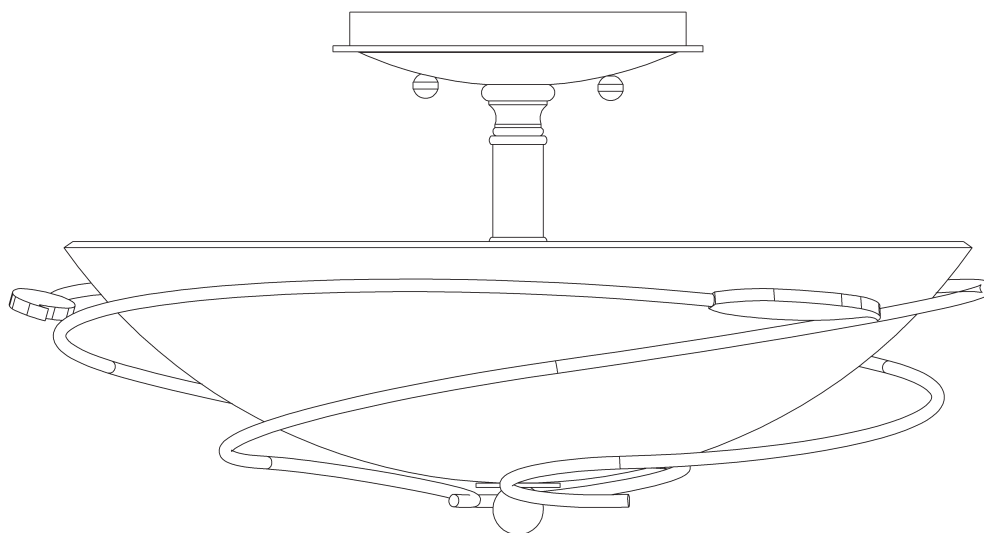

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

45598

Component Parts

- A Crossbar**
- B Threaded Stud (2)**
- C Ground Screw**
- D Canopy**
- E Knurled Ball (2)**
- F Fixture**
- G Nut**
- H Plastic Washer**
- I Rubber Washer**
- J Glass Bowl**
- K Leaf Assembly**
- L Threaded Ball**
- M Nipple**



ASSEMBLY & INSTALLATION INSTRUCTIONS

A632

126712 & 126732 Semi-flush Leaf

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

To Install Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture from the carton.
2. Locate crossbar (A). Thread threaded studs (B) into appropriate locations that align with the holes in the canopy (D). Threaded studs should be threaded into the same side of the crossbar as the ground screw (C).
3. Using two machine screws (not provided), fasten the crossbar (A) to the electrical box with threaded studs (B) pointing downward.


Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

4. Attach a pigtail lead to the ground screw (C). Hold fixture (F) close to ceiling. Using suitable wire connectors (not provided) connect wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.

5. Slide canopy (D) over threaded studs (B) and push firmly to ceiling. Fasten with knurled balls (E). Be sure studs are fully seated in the knurled balls.

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE CANOPY (E) AND THE CEILING.

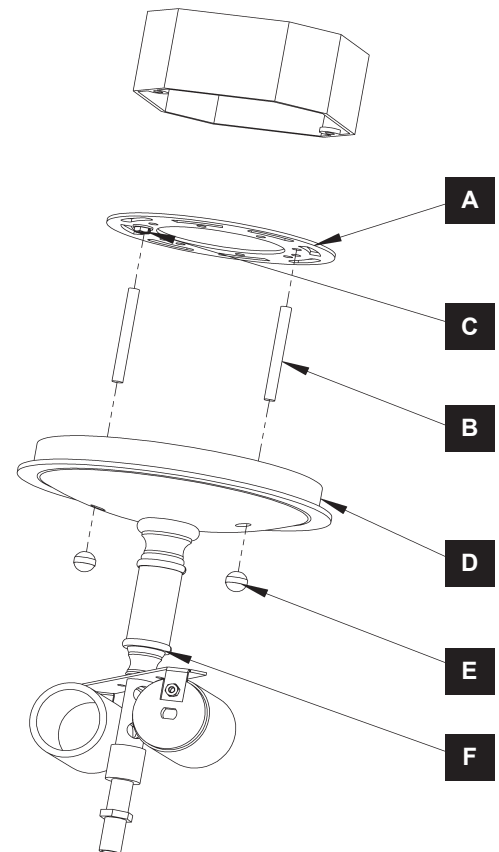

(Figure 1)

CONTINUED



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

45598

ASSEMBLY & INSTALLATION INSTRUCTIONS

A632

126712 & 126732 Semi-flush Leaf

MACHINE

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Install Glass (Figure 2)

1. Install light bulbs (not included).
2. Place plastic washer (H) then rubber washer (I) over nipple (M) against nut (G).

Note: rubber washer fits snugly to hold plastic washer in place.

3. Place glass bowl (J) & leaf assembly (K) over nipple (M) against rubber washer (I) and secure with threaded ball (L). It may be necessary to thread nut (G) up or down the nipple (M) to allow threaded ball (L) to securely fasten to nipple.

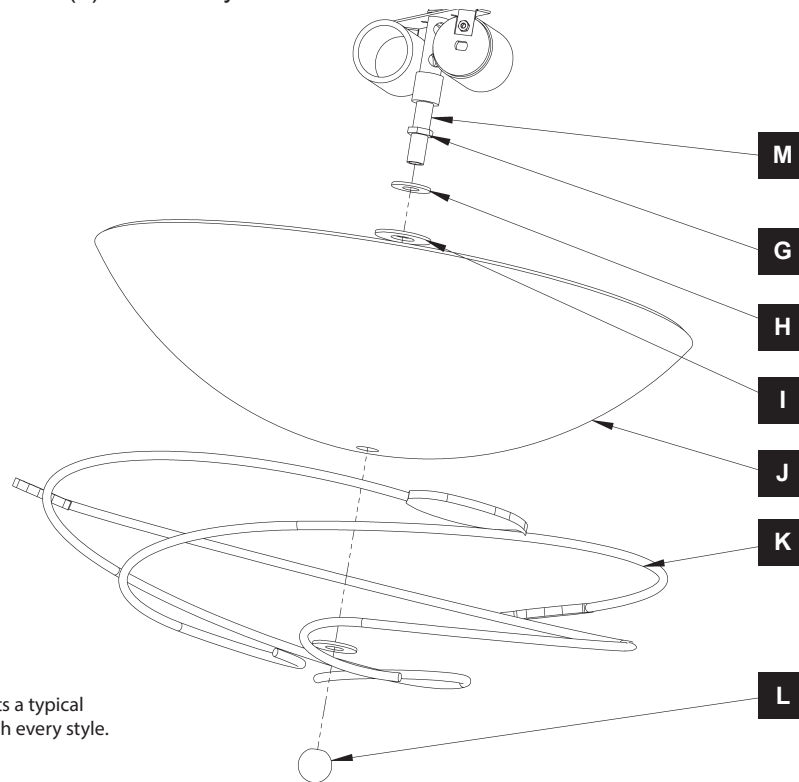

This illustration represents a typical fixture and may not match every style.

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

HF HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

45598