


ASSEMBLY & INSTALLATION INSTRUCTIONS

C122

Snaps Portable (Floor to Ceiling) 402801

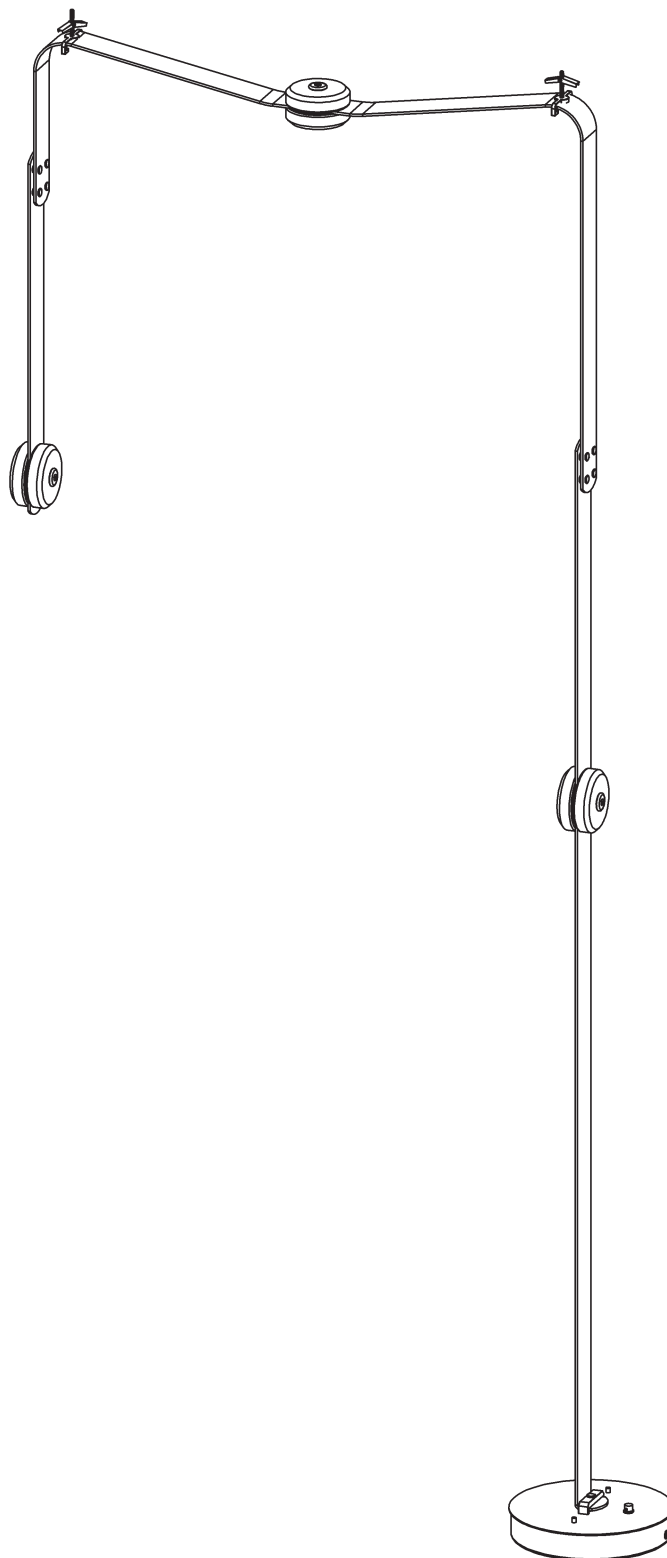

HUBBARDTON FORGE.

Component Parts

A	Long Leather Strap (2)
B	Short Leather Strap
C	Alabaster (6)
D	LED Stud (3)
E	Knob (6)
F	LED Board (6)
G	Housing (3)
H	Base
I	Knurled Screw (1)
J	Cover (1)
K	Nut (2)
L	Female Snap (8)
M	Male Snap (8)
N	Toggle Anchor (3)
O	2" Stud (3)
P	Hook (3)
Q	Wood Stud (3)
R	Adapter (3)
S	Knurled Nut (3)
T	Frosted Lens (6)
U	Clear Glass (6)



Snaps Portable (Floor to Ceiling) 402801

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(J), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Leather To Base (Figure 1)

1. Carefully unpack all components from the carton.
2. Locate base (H).
3. Remove knurled screw (I) from base (H), cover (J), and two nuts (K) from fixture studs. Retain these parts for later use.
4. Align holes in long leather strap (A) with fixture studs and secure with nuts (K).

Caution: Be sure to tighten as this creates an electrical connection.

5. Reattach cover (J) by threading knurled screw (I) into base (H). Knurled screw (I) should align with center hole of leather strap (A).
6. Follow steps on next page to complete installation.

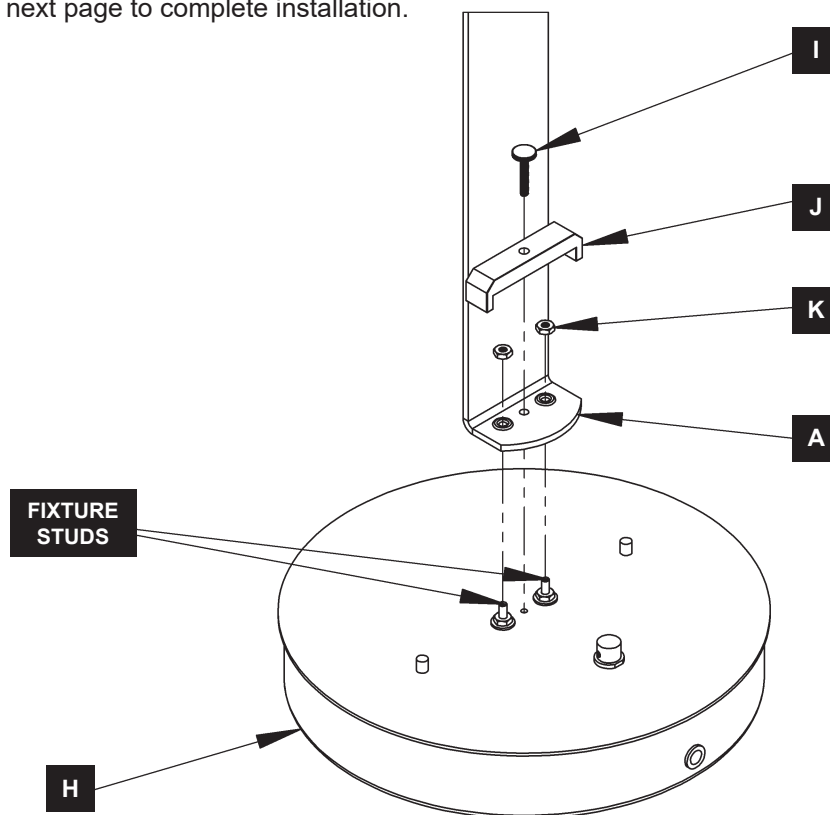


(Figure 1)

Snaps Portable (Floor to Ceiling) 402801

To Complete Install *(Figure 2)*

1. Align female snaps (L) with male snaps (M).
2. Press firmly to lock all snaps (L & M) together.
3. Repeat steps for remaining pairs of snaps.
4. Follow steps on next page to install LED boards and alabaster.

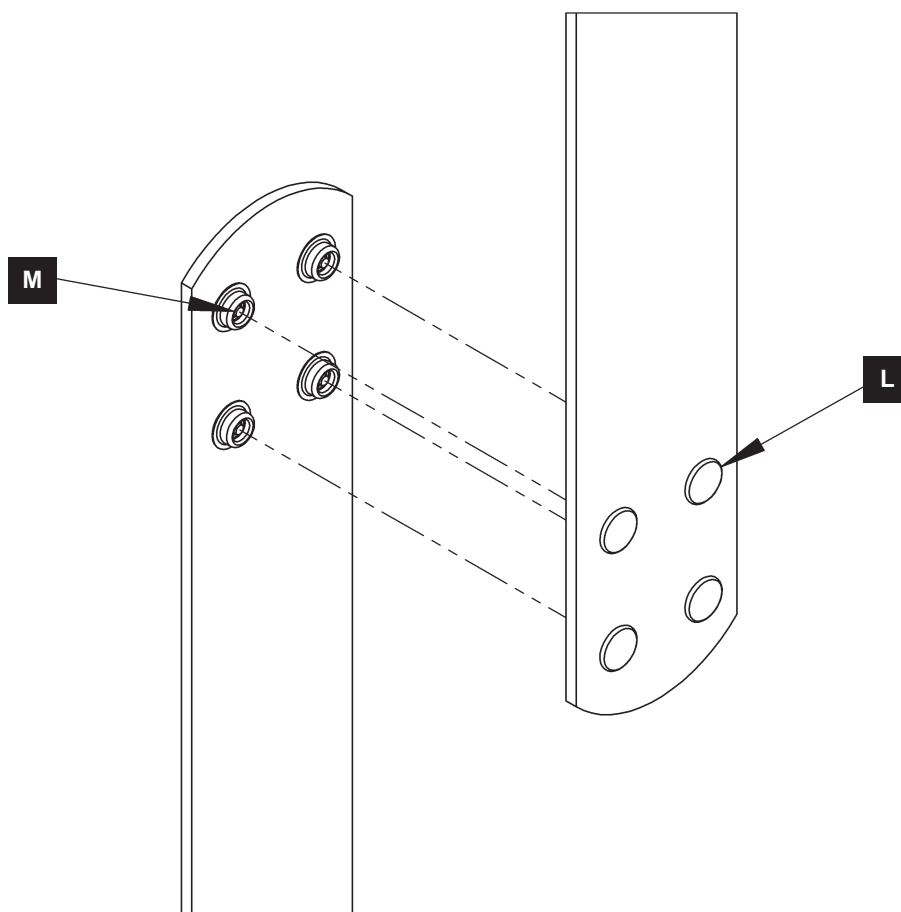

(Figure 2)



HUBBARDTON FORGE.

To Install LEDs & Alabaster (Figure 3)

1. Carefully unpack alabaster (C), housings (G) and LED boards (F).
2. Locate LED stud (D) with knobs (E) attached. Remove one knob (E) and retain for later step.
3. Slide housing (G) over leather strap (G) and center over male snaps (M).

Note: it may be necessary to disconnect leather straps temporarily to install housings.

4. Locate (+) side of leather strap. Align (+) side of LED board (F) with leather strap and pop led board onto snaps. Be sure both snaps on board engage fully.
5. Repeat steps for LED board (F) on opposite side, being sure (+) side is aligned with (+) side of leather strap (G).
6. Slide stud (D) through alabaster (C), hole in leather strap (A or B), and second piece of alabaster (C).

Note: Be careful not to harm LED boards (F) when assembling.


7. Thread knob (E) onto stud (D) and tighten to secure alabaster (C) around housing (G).

Note: Be careful not to overtighten as this could break alabaster.

8. Repeat steps for remaining leather straps (A or B) , LED boards (F) and alabaster (C).
9. Plug in power cord.

NOTE: If any LED Boards do not light, remove alabaster and check orientation of (+) and (-) sides of board. LED board might need to be reversed on leather strap.

10. Follow steps on later pages for optional mounting methods.

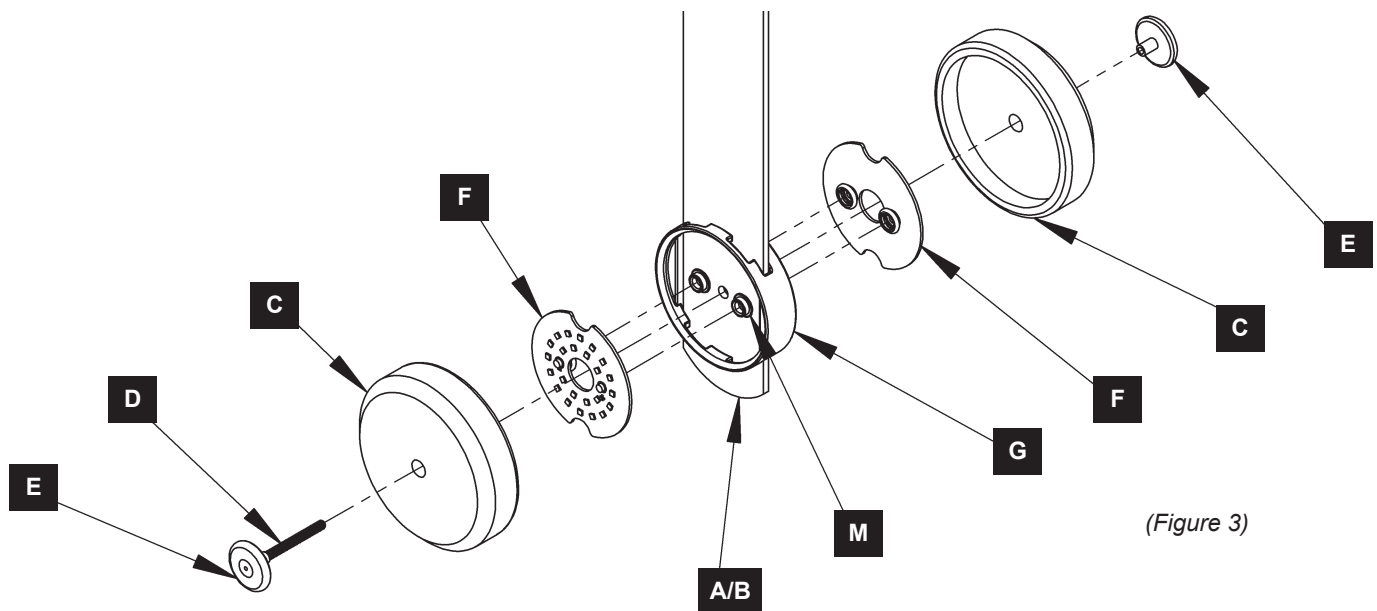

(Figure 3)

Snaps Portable (Floor to Ceiling) 402801

To Assemble Glass Option (Figure 4)

1. Carefully unpack glass (U), lenses (T), housings (G) and LED boards (F).
2. Locate LED stud (D) with knobs (E) attached. Remove one knob (E) and retain for later step.
3. Slide housing (G) over leather strap (G) and center over male snaps (M).

Note: it may be necessary to disconnect leather straps temporarily to install housings.

4. Locate (+) side of fixture/leather strap. Align (+) side of LED board (F) with leather strap and pop led board onto snaps. Be sure both snaps on board engage fully.
5. Repeat steps for LED board (F) on opposite side, being sure (+) side is aligned with (+) side of fixture/leather strap (G).
6. Locate lenses (T). Align clip on lens (T) with notch in LED board (F). Insert clip into notch and rotate lens (T) until it engages with LED board (F). Repeat for remaining lens (T).
7. Slide stud (D) through glass (U), lens (T), hole in leather strap (A or B), second lens (T) and second piece of glass (U).

Note: Be careful not to harm LED boards (F) when assembling.


8. Thread knob (E) onto stud (D) and tighten to secure glass (U) around housing (G).

Note: Be careful not to overtighten as this could break glass or lens.

9. Repeat steps for remaining leather straps (A or B) , LED boards (F) and alabaster (C).
10. Plug in power cord.

NOTE: If any LED Boards do not light, remove glass and lenses to check orientation of (+) and (-) sides of board. LED board might need to be reversed on leather strap.

11. Follow steps on next pages for optional mounting methods.

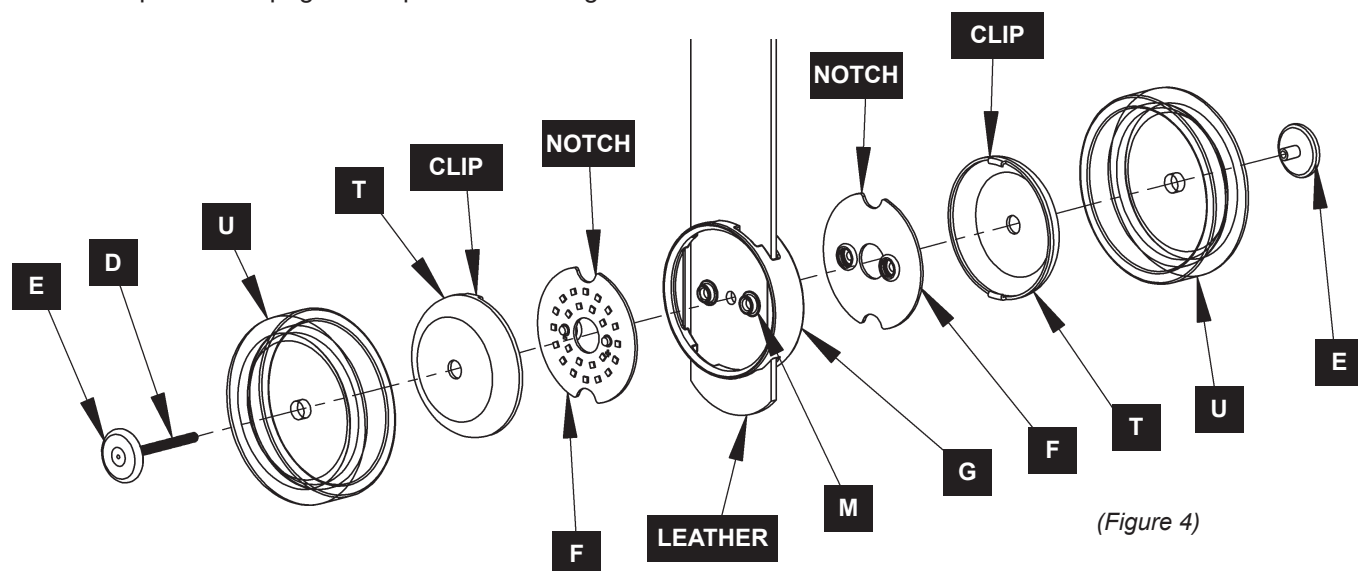


HUBBARDTON FORGE.

Optional Mounting - Leather Hook

To Mount in Drywall - (Figure 5)

1. Locate toggle anchor (N), 2" stud (O), and hook (P), all found in kit bag.
2. Drill 1/2" hole in ceiling/wall in desired location.
3. Thread toggle (N) onto 2" stud (O). Direction critical as toggle (N) will fold onto stud (O) when pushing into drywall.
4. Push toggle (N) through hole until it's able to open. Pull stud (O) back down until you feel toggle (N) engage with backside of drywall.
5. Carefully thread hook (P) onto stud (O). Adjust length of stud in toggle so that stud doesn't stick through hook as it can scratch leather.
6. Raise leather strap, gently fold and install into hook (P).

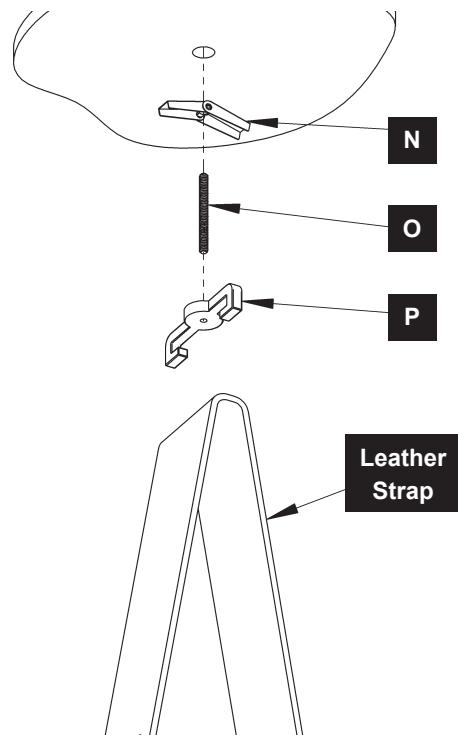


(Figure 5)

To Mount in Wood - (Figure 5B)

1. Locate hook (P) and wood stud (Q), found in kit bag.
2. Jam two nuts (provided in kit bag) together onto wood stud (Q). Thread into wood until only 5/16" of stud is left showing. Remove nuts.

Note: Nuts are to help install the stud without marking up threads.

3. Carefully thread hook (P) onto wood stud (Q) until tight.
4. Raise leather strap, gently fold and install into hook (P).

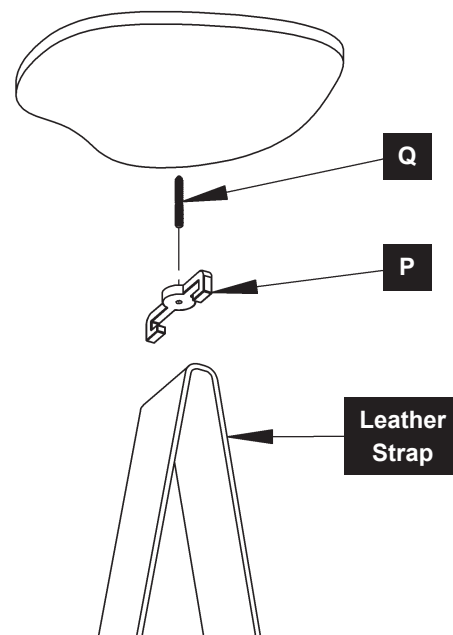

(Figure 5B)



Optional Mounting - Alabaster Adapter


To Mount in Drywall - (Figure 6)

1. Locate toggle anchor (N), 2" stud (O), and adapter (R), all found in kit bag.
2. Drill 1/2" hole in ceiling/wall in desired location.
3. Thread toggle (N) onto 2" stud (O). Direction critical as toggle (N) will fold onto stud (O) when pushing into drywall.
4. Push toggle (N) through hole until it's able to open. Pull stud (O) back down until you feel toggle (N) engage with backside of drywall.
5. Thread knurled nut (S) onto stud (O) and tighten to drywall. Adjust stud (O) until there is 3/8" of stud sticking through knurled nut (S).
6. Carefully thread adapter (R) onto stud (O) and up to knurled nut (S) until tight.
7. Remove one knob (E) from LED stud (D).
8. Slide LED stud (D) through alabaster (C), hole in leather strap, and second piece of alabaster (C).

Note: Be careful not to harm LED boards when assembling.

9. Press alabaster (C) up to adapter (R) and thread LED stud (D) into adapter (R) until all parts are tight.

Note: Be careful not to overtighten as this could break alabaster.

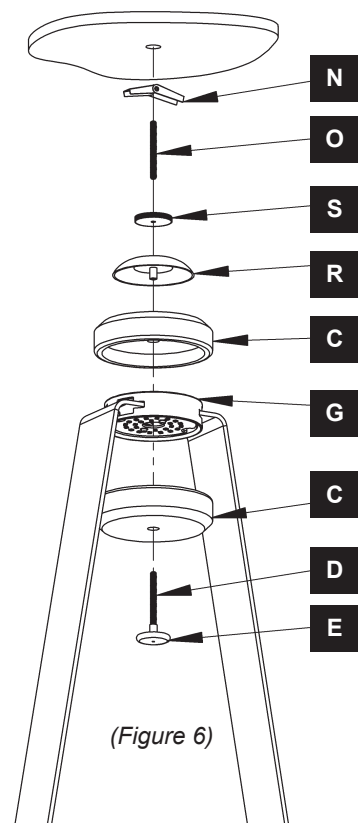

(Figure 6)


To Mount in Wood - (Figure 6B)

1. Locate adapter (R) and wood stud (Q), found in kit bag.
2. Jam two nuts (provided in kit bag) together onto wood stud (Q). Thread into wood until only 3/8" of stud is left showing. Remove nuts.
- Note:** Nuts are to help install the stud without marking up threads.
3. Carefully adapter (R) onto wood stud (Q) until tight.
4. Remove one knob (E) from LED stud (D).
5. Slide LED stud (D) through alabaster (C), hole in leather strap, and second piece of alabaster (C).

Note: Be careful not to harm LED boards when assembling.

6. Press alabaster (C) up to adapter (R) and thread LED stud (D) into adapter (R) until all parts are tight.

Note: Be careful not to overtighten as this could break alabaster.

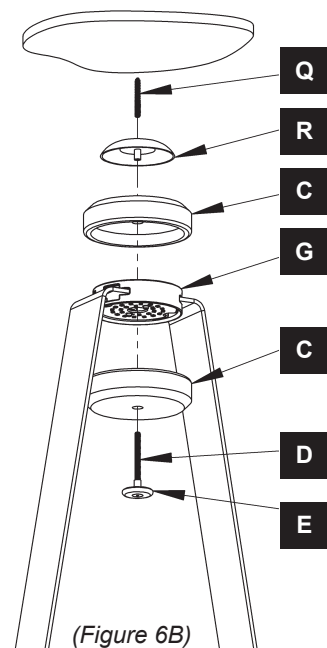

(Figure 6B)




ASSEMBLY & INSTALLATION INSTRUCTIONS

C122

Snaps Portable (Floor to Ceiling) 402801

IMPORTANT NOTES:

- Additional leather straps and LED modules can be ordered individually. Contact the dealer from which you purchased this product for more information.
- Due to electrical components included with this fixture, a max of (3) additional LED modules can be added.
- If more than the allowed LED modules are desired, please contact dealer about a custom fixture.
- Leather extension straps without LEDs and a triple ending strap with options can also be purchased.

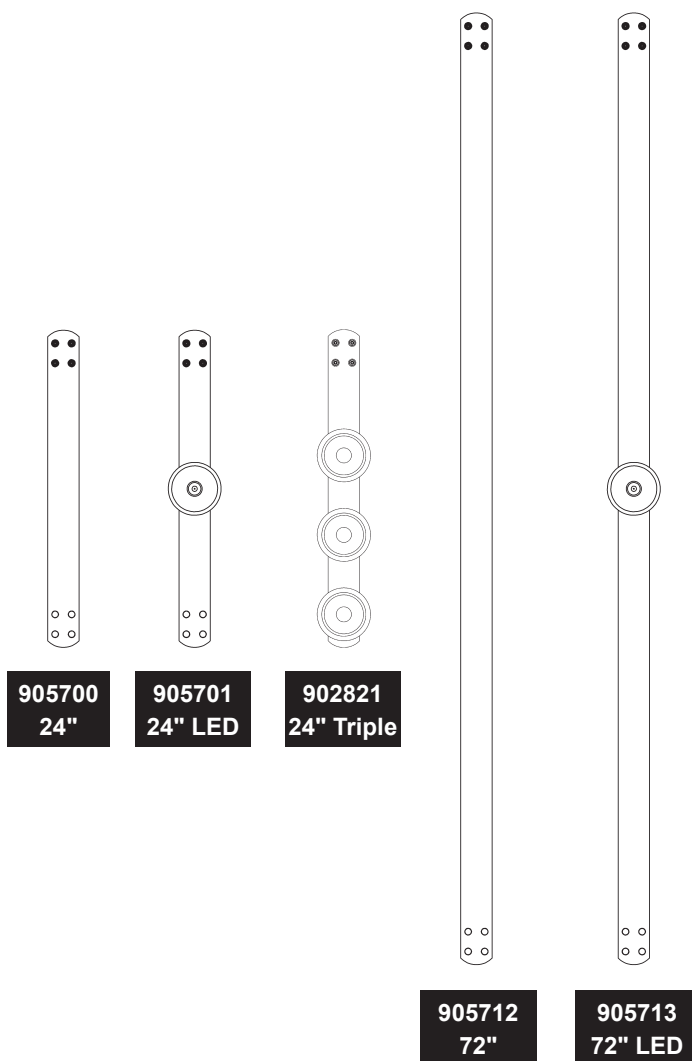

Product Care & Cleaning:

Leather: Leather is a natural product and straps can have variations in color and imperfections in the hides. This leather can be oiled or dyed to enhance the look. For cleaning, wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Aniline Leather Cleaner, Conditioner, & Protector, or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol, or ink removers should never be used.

Alabaster: Use a dry soft cloth or a "feather duster" to remove any dust accumulation. Raw alabaster should not be polished with wax, or cleaned with wet or acidic cleaners.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*



HUBBARDTON FORGE.