

Angelo Chandelier**F3136/8 1.0****VISUAL COMFORT & CO.****STUDIO COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

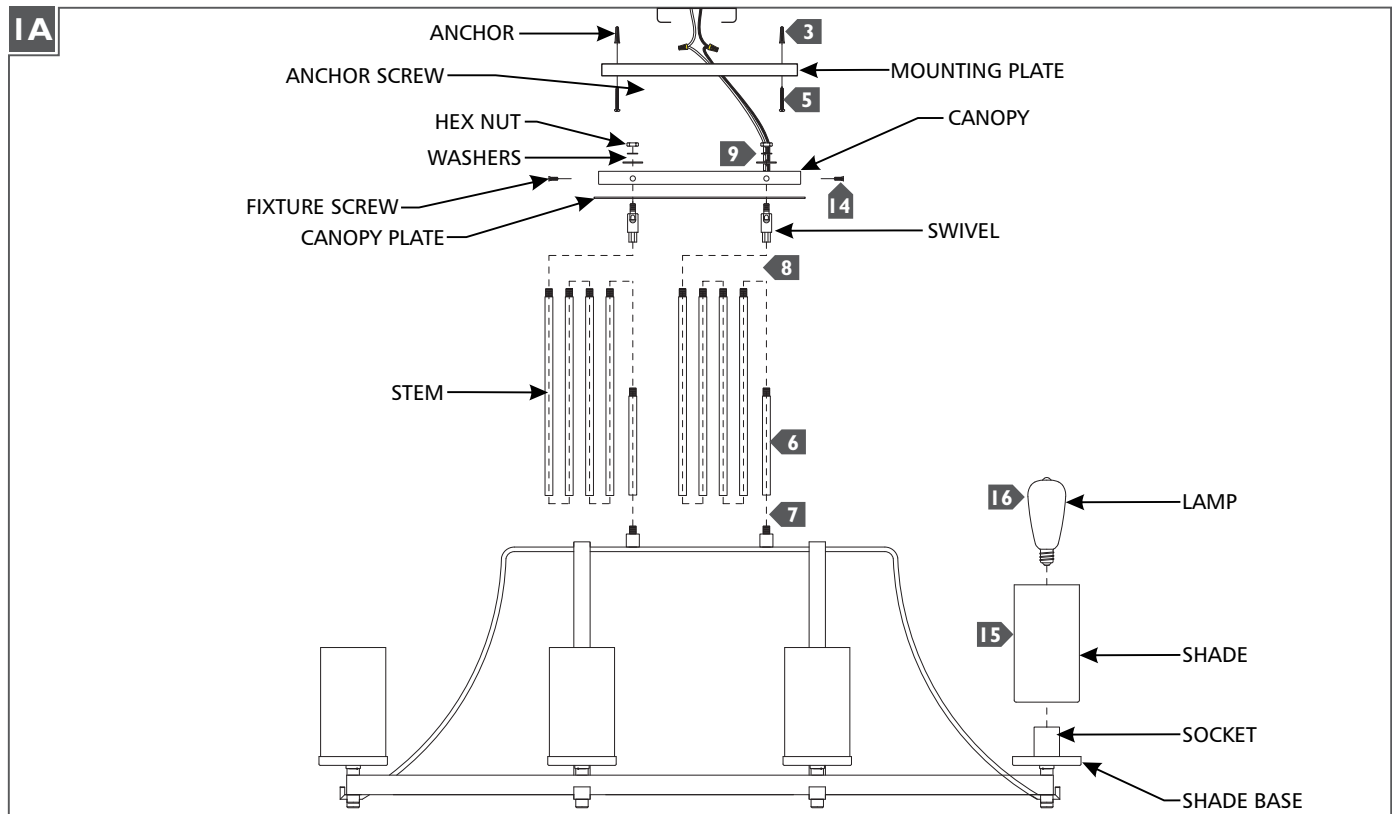

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate.
- 3** Install the anchors to the marked points.
- 4** Secure the mounting plate to the junction box.
- 5** Screw the anchor screws into the anchors.
- 6** Determine the height of the fixture with the provided stems and assemble them by screwing them together.
- 7** Feed the cord through the stem assembly and screw the stem assemblies to the fixture.
- 8** Feed the cord through the swivels and screw them to the stem assemblies.
- 9** Secure the swivels to the canopy and canopy plate with the provided nuts and washers.
- 10** Pull the power line wires out of the junction box. Trim the cord leaving enough to make electrical connections.
- 11** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the electrical box, place the canopy onto the mounting plate, and secure it in place by screwing in the fixture screws.
- 15** Install the shade by placing it into the shade base. Repeat for remaining shades.
- 16** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.