

Nodes Chandelier

KC1035, KC1064 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

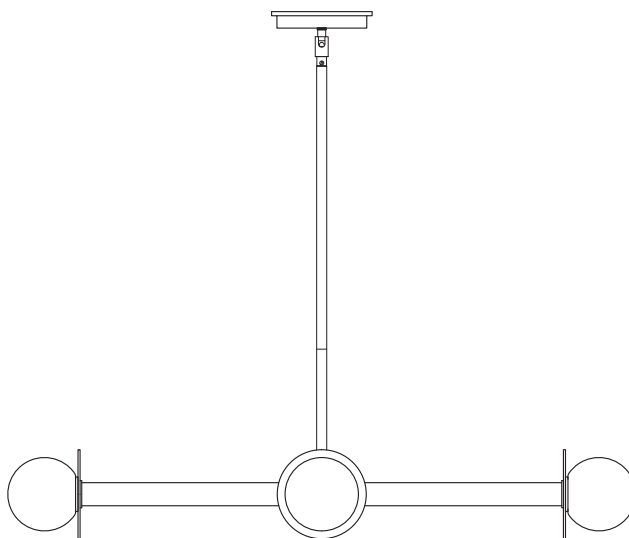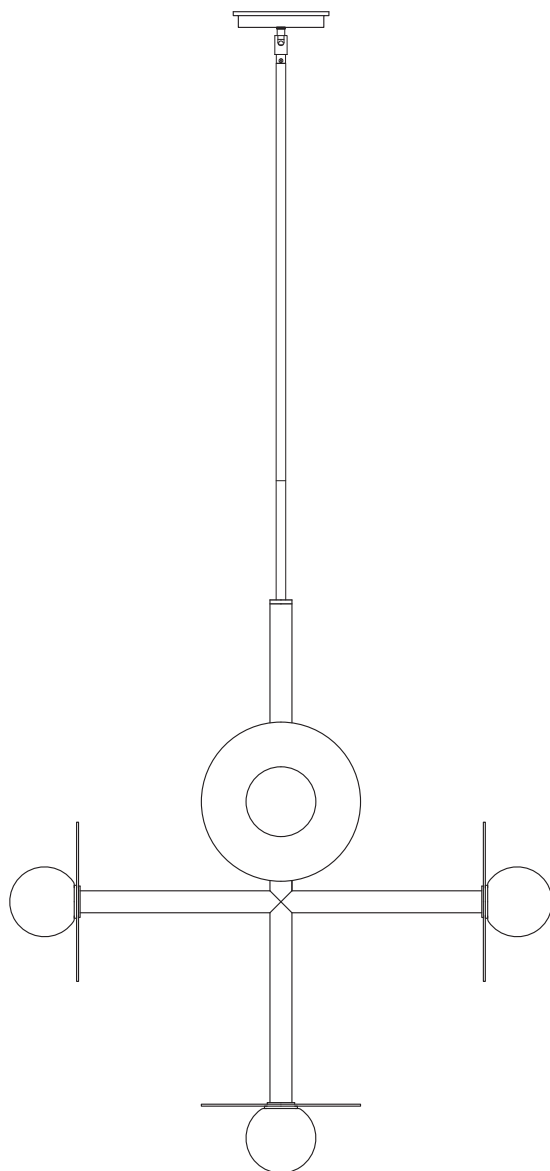

Install the Fixture

1A

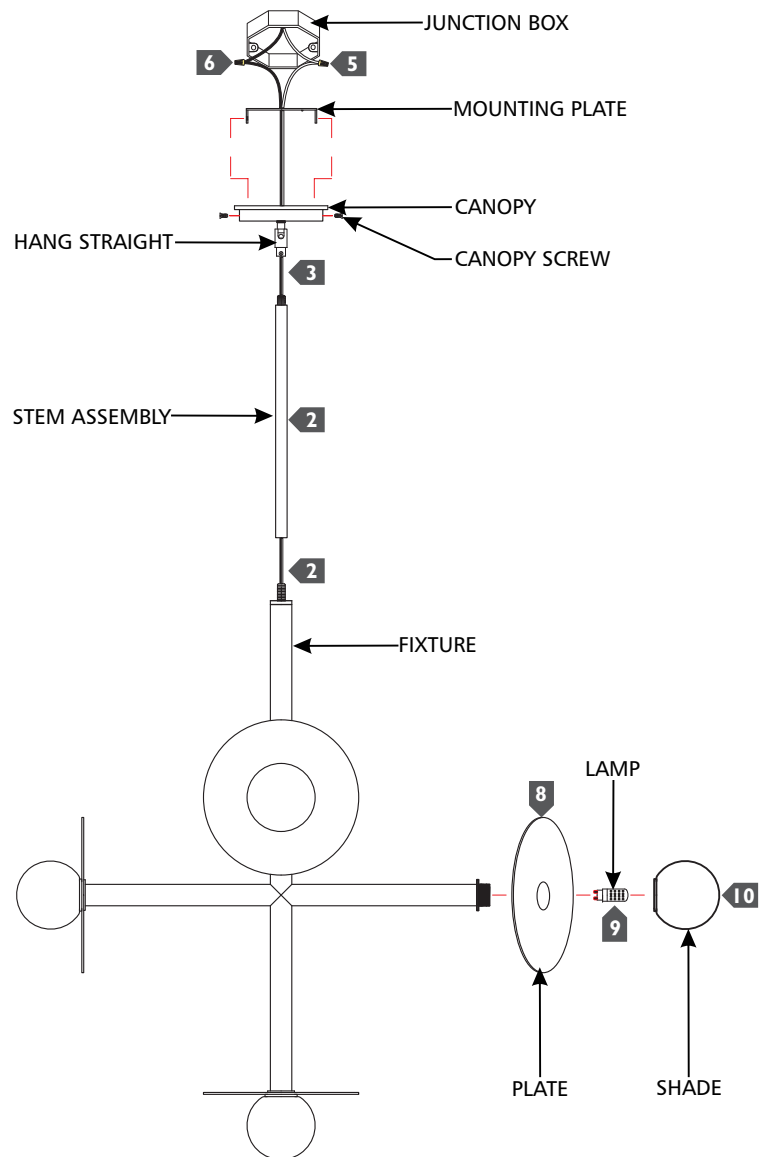

- 1 Secure the mounting plate to the junction box.
- 2 Determine the wanted height or look of the fixture with the provided stems, assemble them by screwing them together, and screw the stem assembly onto the fixture.
- 3 Feed the fixture wires through the hang straight and canopy, then screw the canopy onto the stem assembly.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the canopy screws.
- 8 Screw the plate onto the socket. Repeat for remaining plates.
- 9 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 10 Install the shade by screwing it onto the socket. Repeat for remaining shades.