

Angelo Flush Mount

FM530 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

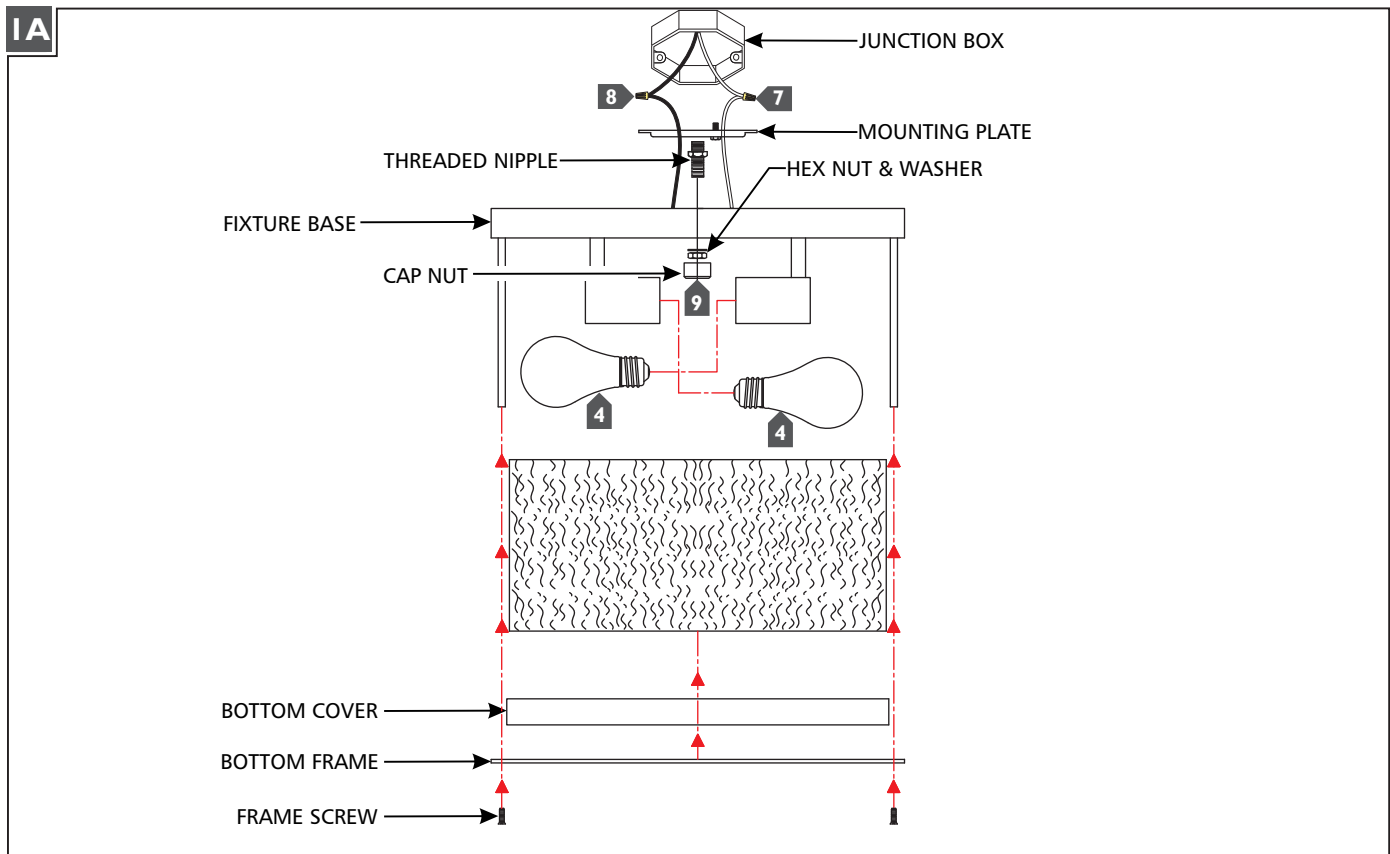

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2** Secure the mounting plate to the junction box.
- 3** Remove the frame and cover by unscrewing the frame screws.
- 4** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 5** Insert the glass into the fixture frame, place the bottom cover on the bottom frame, and secure the bottom frame to the fixture frame using the frame screws.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.
- 9** Place the fixture base and washer onto the threaded nipple, then secure them in place by screwing the hex nut onto the nipple followed by the cap nut.

SAVE THESE INSTRUCTIONS!