


ASSEMBLY INSTRUCTIONS FOR QUINN FLOOR LAMP

Model # 1504-15

1504-15 2.0

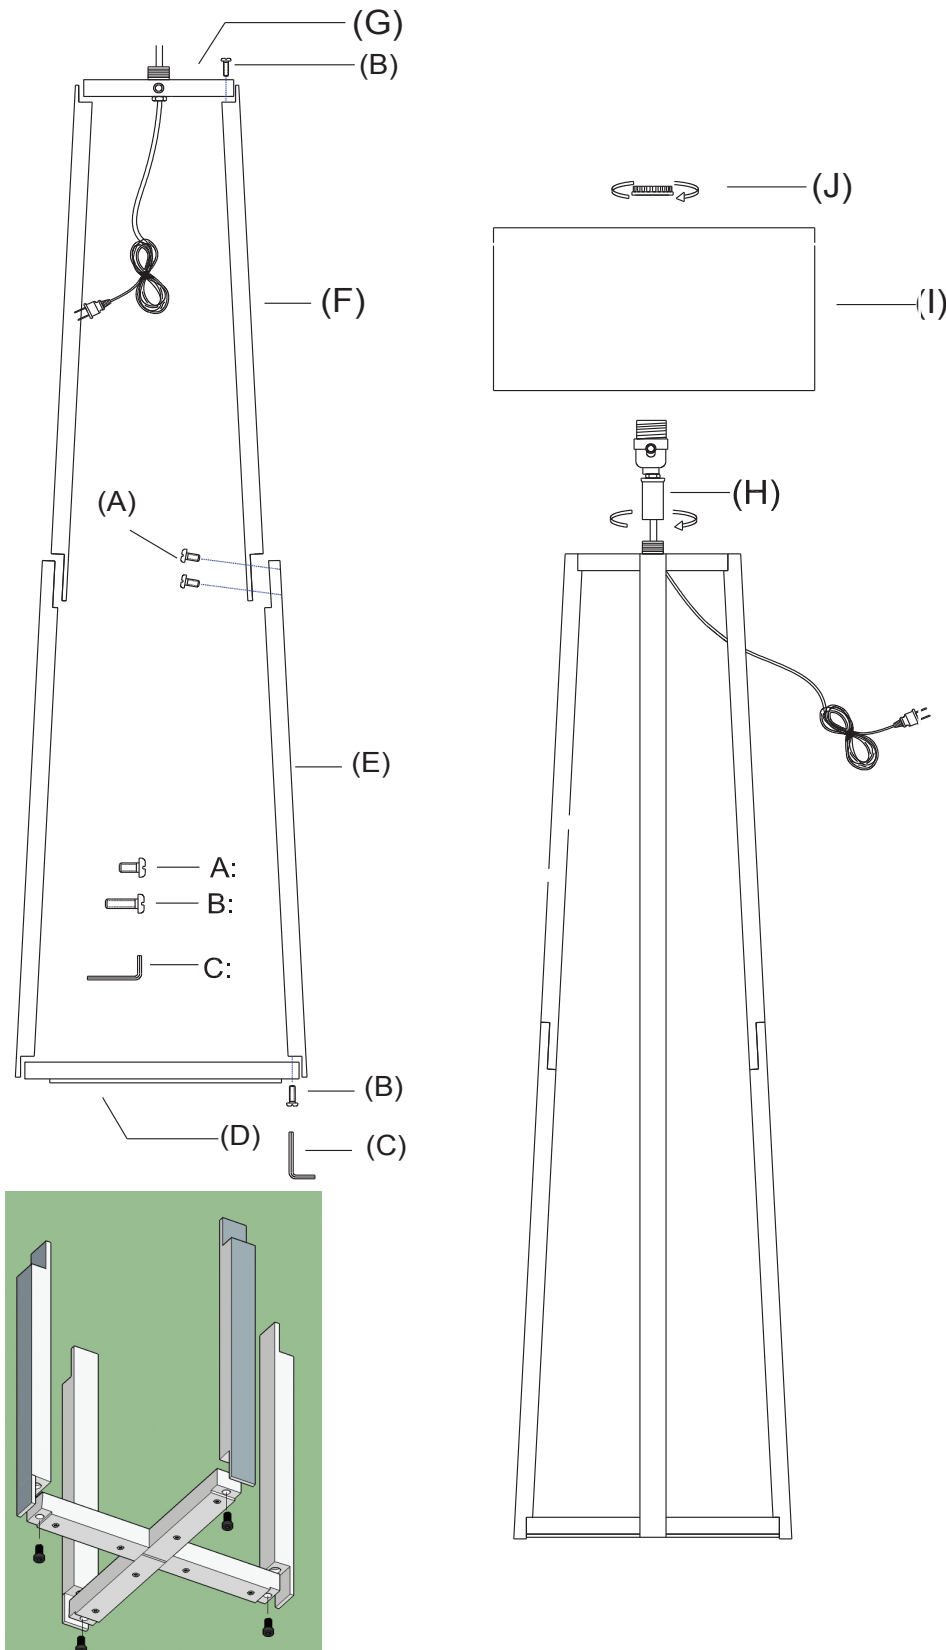

- 1) You will start by assembling the X base piece (D) to the bottom poles (E). Before you screw these together Be sure that the screws and labels on the X Base piece (D) are facing down toward the floor, or else the holes will not align. See diagram for reference. Now, install 4 bottom poles (E) onto the X base piece (D) using 4 Hex screws (B). Tighten each screw using the provided Hex Wrench (C), and make sure the bottom poles (E) are aligned correctly to the X base piece (D) after you are done tightening.
- 2) Install 4 top poles (F) onto the bottom poles (E) using 8 Hex screws (A). Tighten each screw using the provided Hex Wrench (C), and make sure the top poles (F) are aligned correctly to each bottom pole (E) after you are done tightening.
- 3) Fasten socket assembly (H) onto top X piece (G). Be careful not to twist power cord. Tighten securely.
- 4) Install 4 top poles (F) onto the top X piece (G) using 4 Hex screws (B). Tighten each screw using the provided Hex Wrench (C), and make sure the top poles (F) are aligned correctly to top X piece (G) after you are done tightening. Socket should be facing up when the top frame is attached to the legs.
- 5) Place shade (I) onto socket assembly (H).
- 6) Tighten socket ring (J) onto socket assembly (H).

GENERAL PRODUCT INFORMATION:

This product is suitable for dry locations only.



IMPORTANT SAFETY INSTRUCTIONS:

This portable lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. **DO NOT ALTER THE PLUG.**

BULB TYPE: (1) 150Watt 3-Way Medium Base

FIG 1: BASE ASSEMBLY
Bottom of base facing floor