


CRYSTORAMA LIGHTING

ASSEMBLY INSTRUCTION MODEL #GRG-1043-AG



Drawing (1)



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3-Cand.Bulb


25 Watts Recommended 40 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to install for hanging:

- 1.Determine the desired location you'd like to put this fixture on the wall, and mark four points on it with the same distance as the holes on the mounting plate .
- 2.Drill the holes at the marked points and insert the anchors into the holes in the wall, and attach the mounting plate onto the wall using the anchor screws.
- 3.Attach the mounting plate onto the outlet box using two outlet box screws.
- 4.Attach the backplate onto the mounting plate and secure with the screws.
- 5.Install the glass shade over the socket and secure with the socket ring using the wrench.

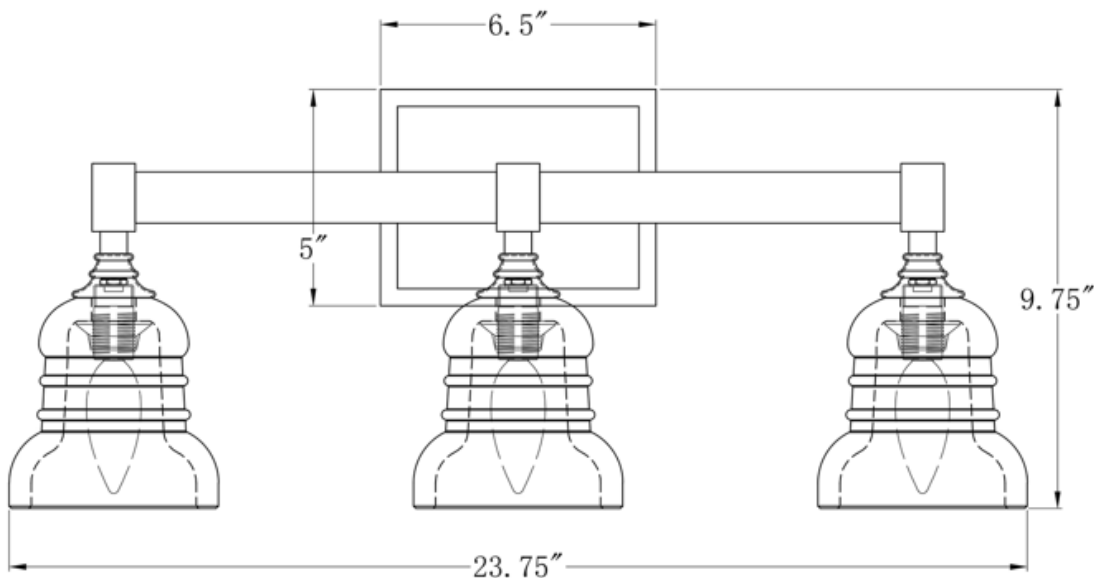

⚠ WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA LIGHTING

PART NUMBER MODEL #GRG-1043-AG



Crystorama.com

Part Number

Part Numbers

- A. Mounting Hardware
 - (1) Mounting Plate
 - (4) Screws
 - (3) Wire Nut
 - (2) Outlet box Screws
 - (4) Anchor Screws
- B. (1) Backplate:
 - W6.5" x H5" x D.5"
 - XME1043AGBKP5IN
- C. (3) Socket
- D. (3) Glass Shade; W5" x H5",
 - XME1040GLA5IN
- E. (3) Socket Ring
- F. (1) Wrench

