



CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #WIN-615-GA-CL-MWP

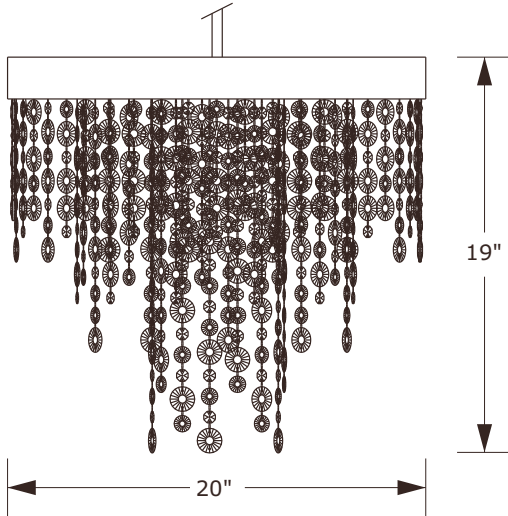

DETAILED ILLUSTRATION

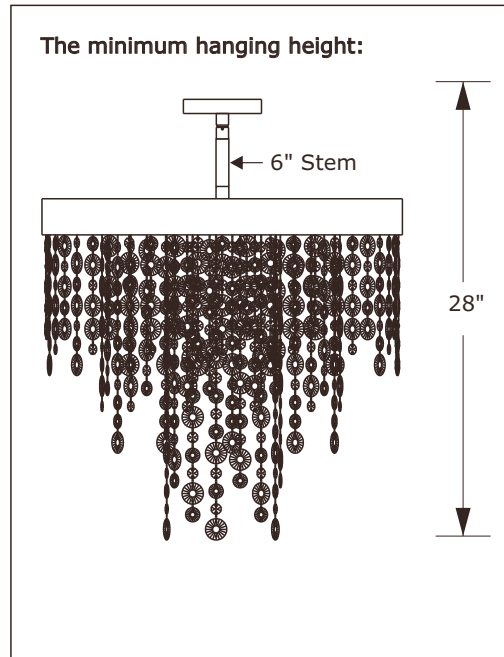


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

How to Install

- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Attach all four stems together, making sure the 6" stem is installed and located at the top.
- 3.Feed fixtures wiring through the stem assembly prior to connection.
- 4.Now take the bottom of the stem assembly (12" stem) and connect it to the fixture frame.
- 5.The top side of the stem assembly (6" stem), will then be attached to the swivel.
- 6.Insert recommended bulb (not included).
- 7.Dress the fixture with crystal as illustrated.

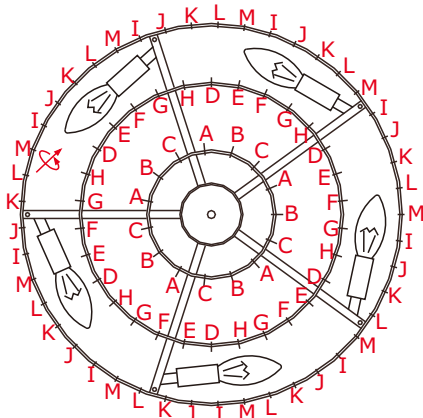


SUGGESTED CRYSTAL PLACEMENT TOP VIEW
PLEASE REFERENCE CRYSTAL KEY

Crystal Key


- A.5 Sets.
(11)14mm + (5)20mm + (2)30mm
B.5 Sets.
(10)14mm + (6)20mm + (1)30mm
C.5 Sets.
(9)14mm + (8)20mm
D.6 Sets.
(5)14mm + (3)20mm + (1)30mm
E.6 Sets.
(6)14mm + (4)20mm + (1)30mm
F.6 Sets.
(2)14mm + (4)20mm + (1)30mm
G.6 Sets.
(9)14mm + (3)20mm + (1)30mm

- H.6 Sets.
(4)14mm + (4)20mm
I.9 Sets.
(4)14mm + (2)20mm + (1)30mm
J.9 Sets.
(3)14mm + (2)20mm + (1)30mm
K.9 Sets.
(4)14mm + (4)20mm
L.9 Sets.
(3)14mm + (3)20mm + (1)30mm
M.9 Sets.
(2)14mm + (2)20mm + (1)30mm

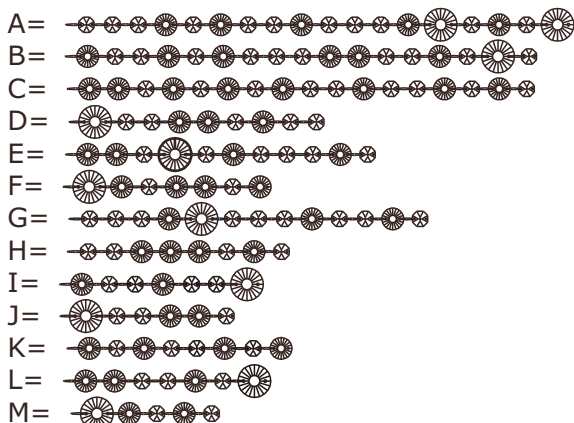

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

PART NUMBER MODEL #WIN-615-GA-CL-MWP

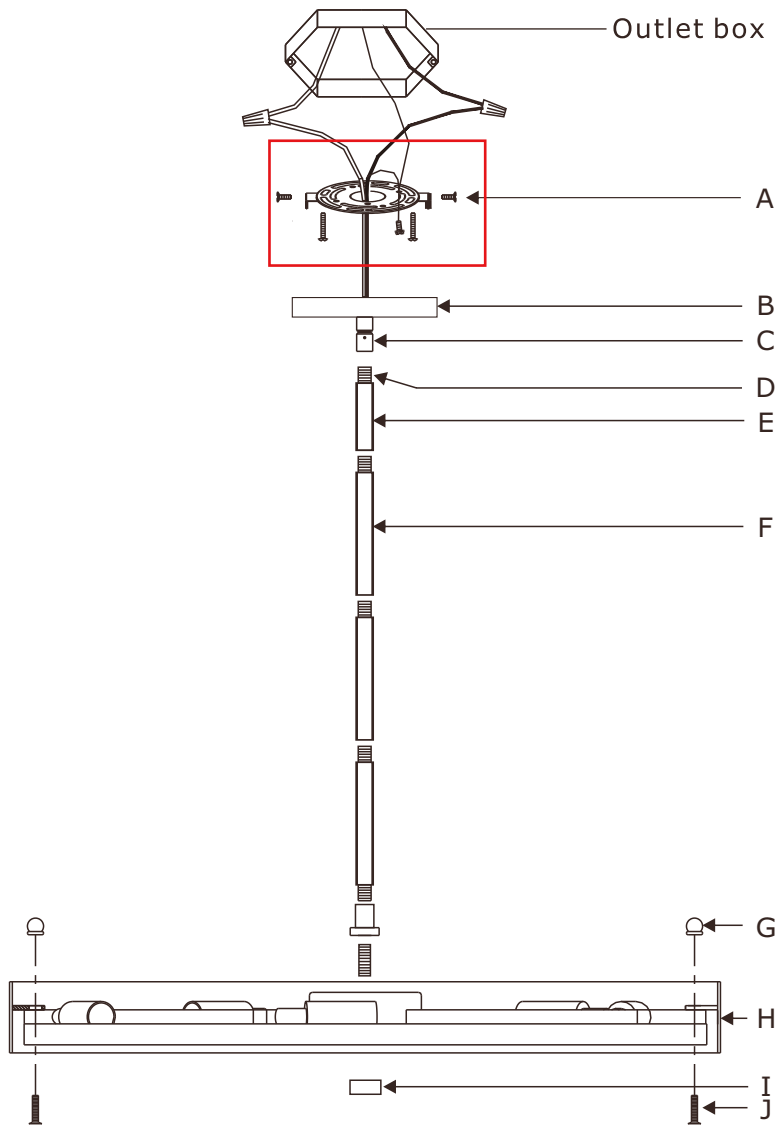

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5",H0.79") #XRE610GACAN5IN
- C. (1) - Swivel
- D. (5) - Threaded Pipe
- E. (1) - Hanging Stem(6",15.9mm) #XRE615GAROD6IN
- F. (3) - Hanging Stem(12",15.9mm) #XRE615GAROD12IN
- G. (5) - Ball Nut #XRE612GABANUT
- H. (1) - Metal Frame
- I. (1) - Finial #XRE615GAFIN
- J. (5) - Flat Screw