


CRYSTORAMA LIGHTING




ASSEMBLY INSTRUCTION MODEL # COR-7105-SG

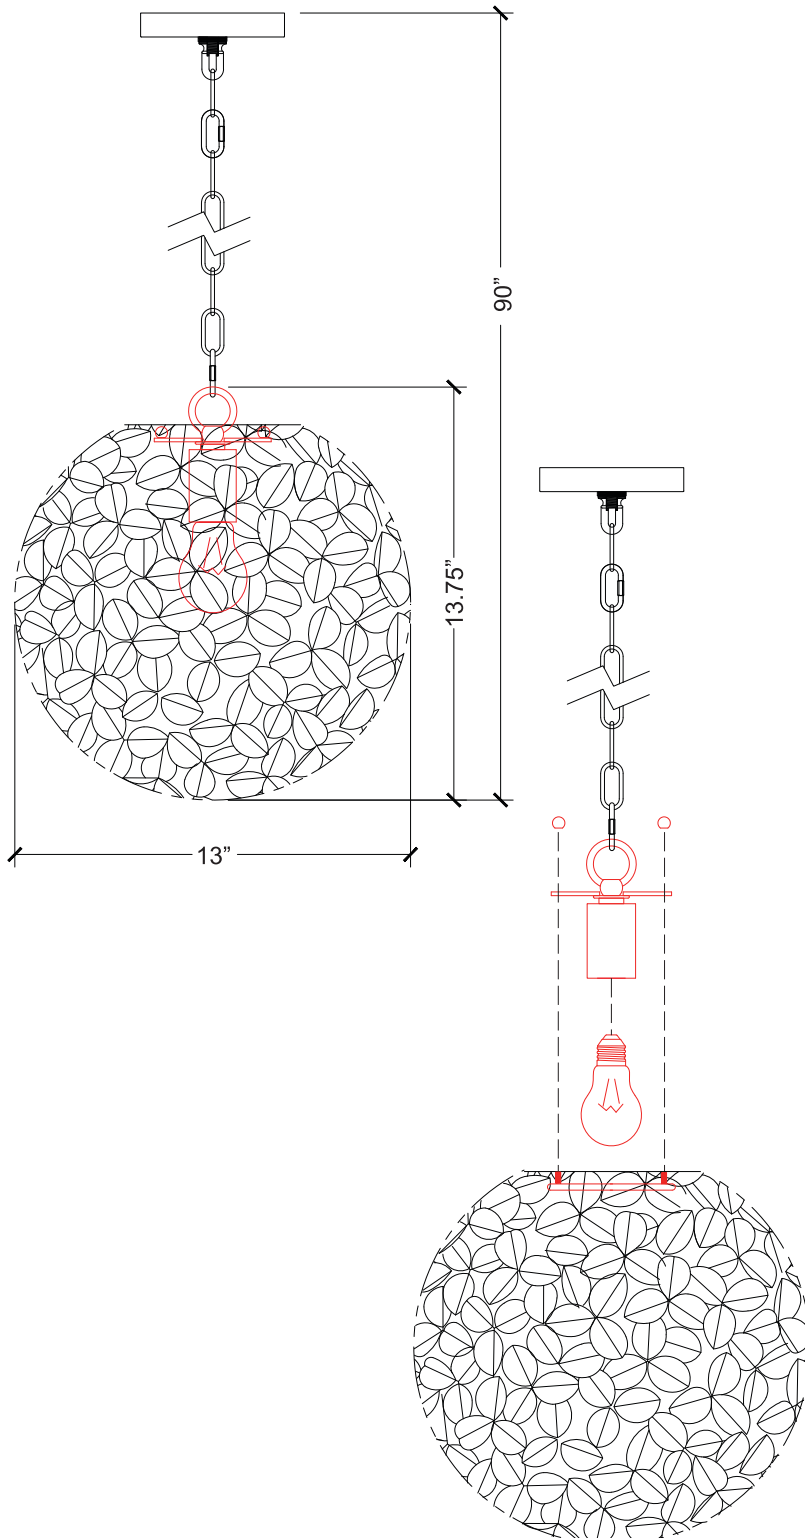

WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electric codes.



You will need 1-Medium Base Bulb
60 Watts Recommended 100 Watts Max
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED.

How to install

1. Remove the frame from the spoke by loosening the ball nuts on the top of the frame.
2. Install the bulb (not included) onto the socket.
3. Put the frame back and secure it onto the spoke using the ball nuts.
4. Decide the preferred hanging height and choose the correct chain length needed.
5. Feed the wire through the chain and canopy. Hook one end of the chain link onto the fixture loop, and the other end onto the collar loop.
6. Install the mounting strap onto the outlet box.
7. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy to the ceiling with the collar ring.


How to replace the bulb

1. Remove the frame from the spoke by loosening the ball nuts on the top of the frame.
2. Install the bulb(not included) onto the socket.
3. Put the frame back and secure it onto the spoke using the ball nuts.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

PART NUMBER MODEL # COR-7105-SG

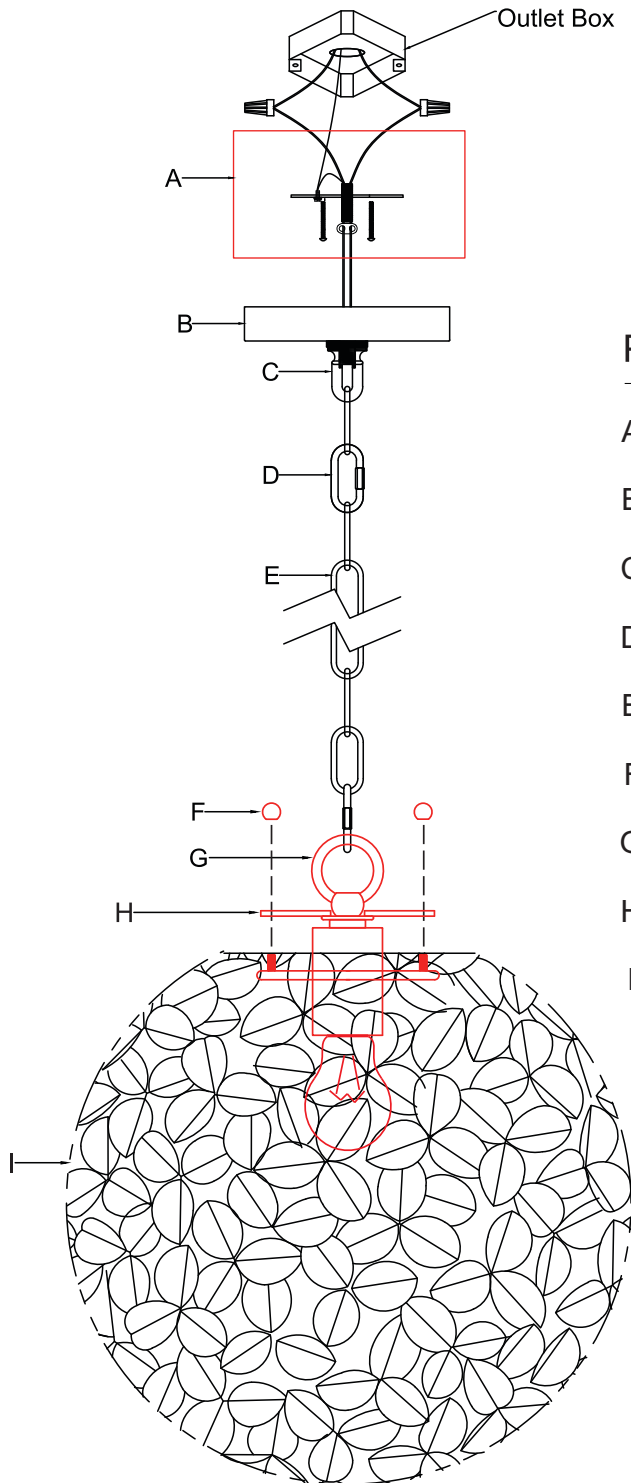

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy (D4.75", H0.8") #XRE7105SGCAN4.75IN
- C. (1) - Collar Loop with Ring
- D. (2) - Chain Link
- E. (1) - Chain (72", 3.2mm) #XRE7105SGCHA3.2MM
- F. (3) - Ball Nut
- G. (1) - Fixture Loop
- H. (1) - Spoke
- I. (1) - Metal Frame