


PAYTON ONE-LIGHT MEDIUM PENDANT

DJP1131

General Product Information



Tools Required



Safety Information

SAVE THESE INSTRUCTIONS!

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

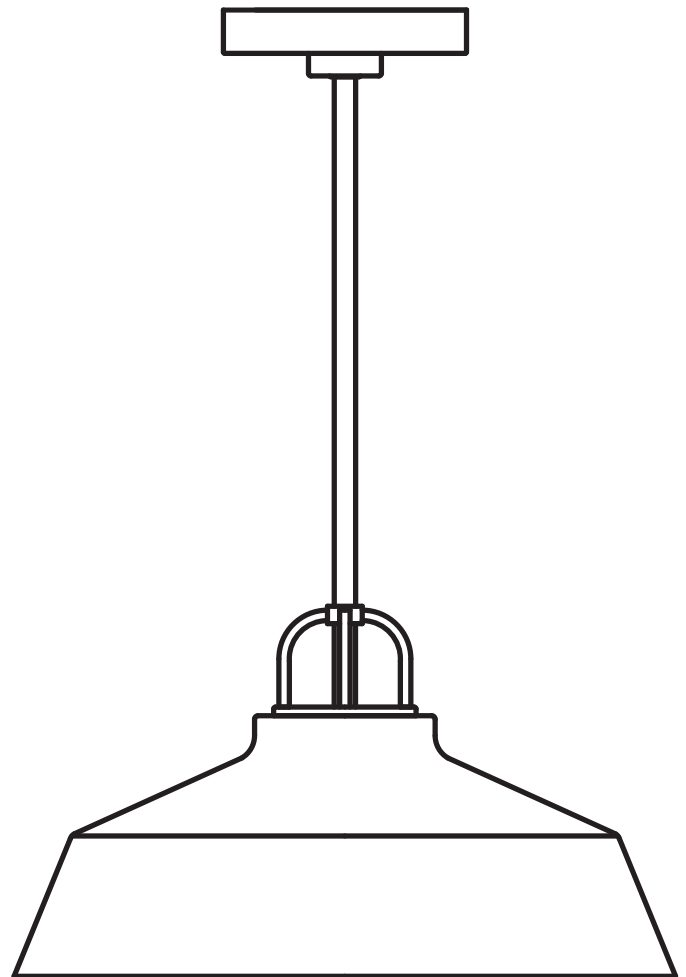

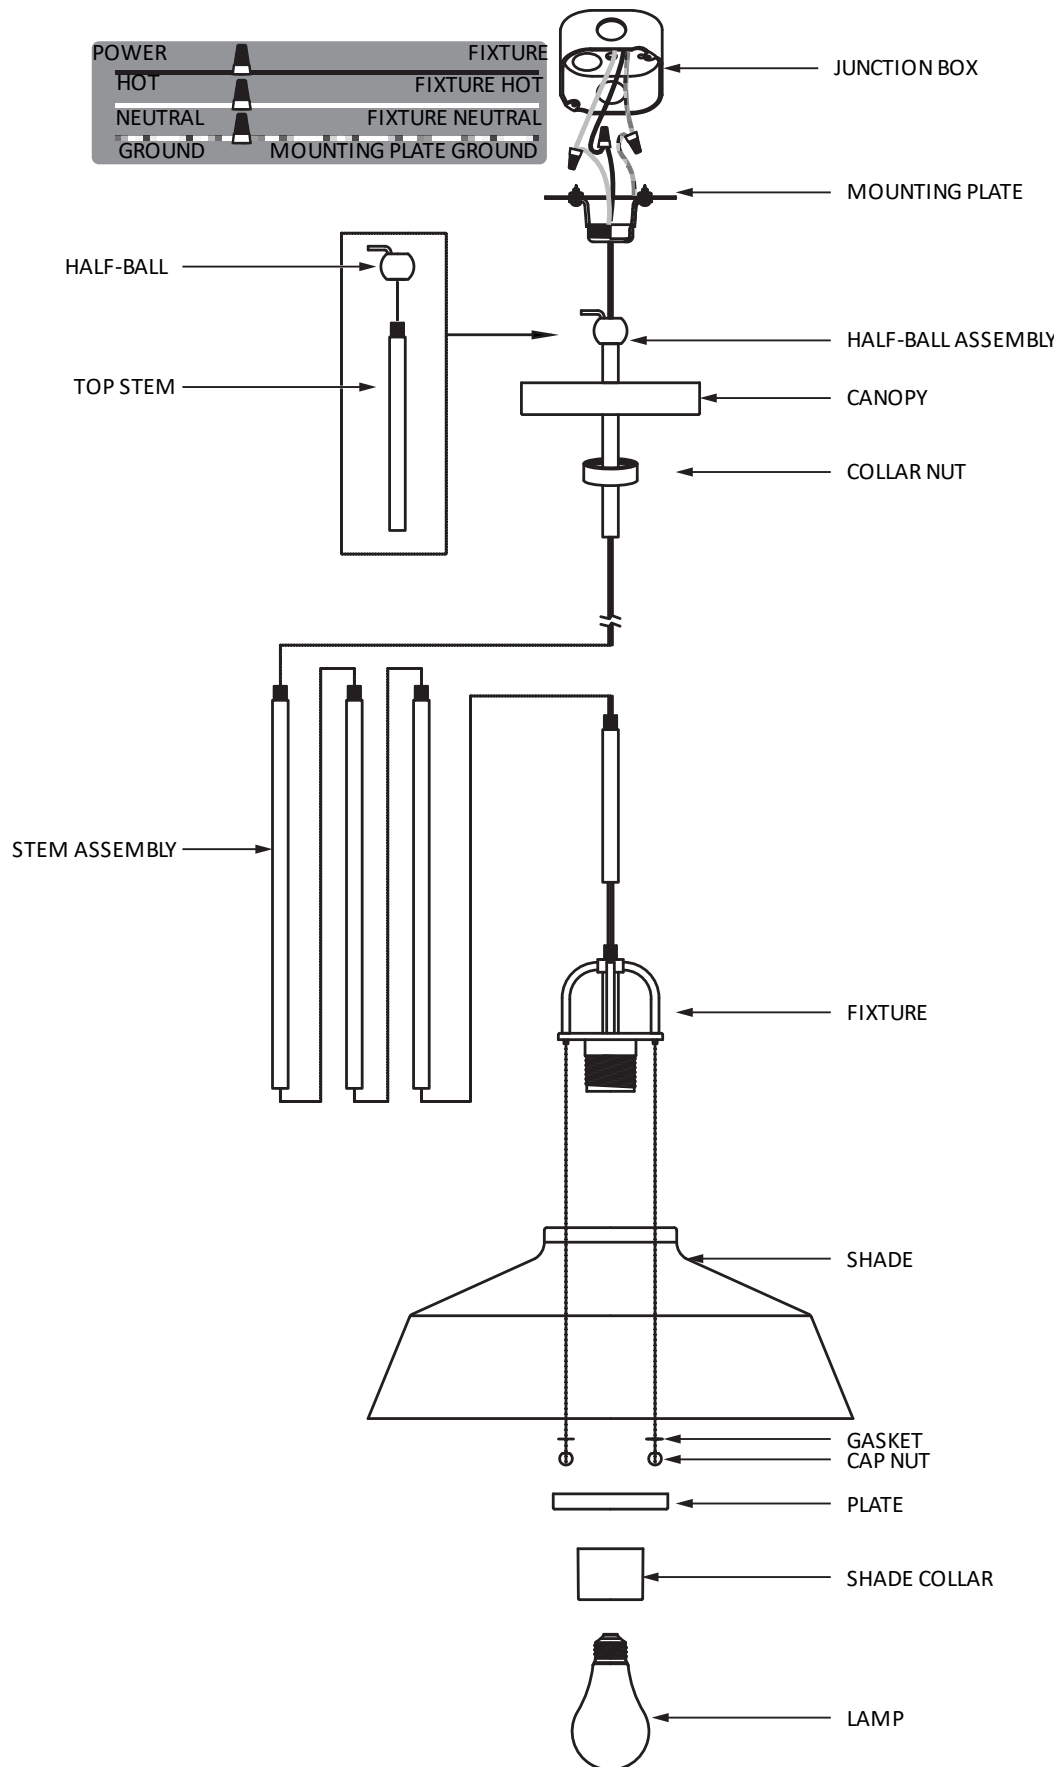

INSTRUCTIONS

I. Preparing the Fixture

1. Feed the fixture wires and ground wires through the rod components, collar ring, and canopy.
2. Screw the rod components together.
3. Install the mounting plate to the junction box.
4. Screw the threaded nipple onto the mounting plate, then attach the collar and canopy loop onto the threaded nipple.

II. Wiring the Fixture

1. Separate two sides of molded wire and strip insulation on each to 5/8".
2. Connect the following wires using a wire nut:
 - a) Fixture neutral wire to the junction box neutral wire.
 - b) Fixture hot wire to the supply hot wire.
3. Attach supply grounding wire to the grounding screw. **Note: The fixture must be grounded.**
4. Tuck the wire connections into the junction box.

III. Installing the Fixture

1. Install the canopy to the junction box and secure with the collar ring.
2. Insert lightbulbs into the sockets. Turn on the power.