

**Nori Chandelier****F3129/6 1.0****VISUAL COMFORT & Co.****STUDIO COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

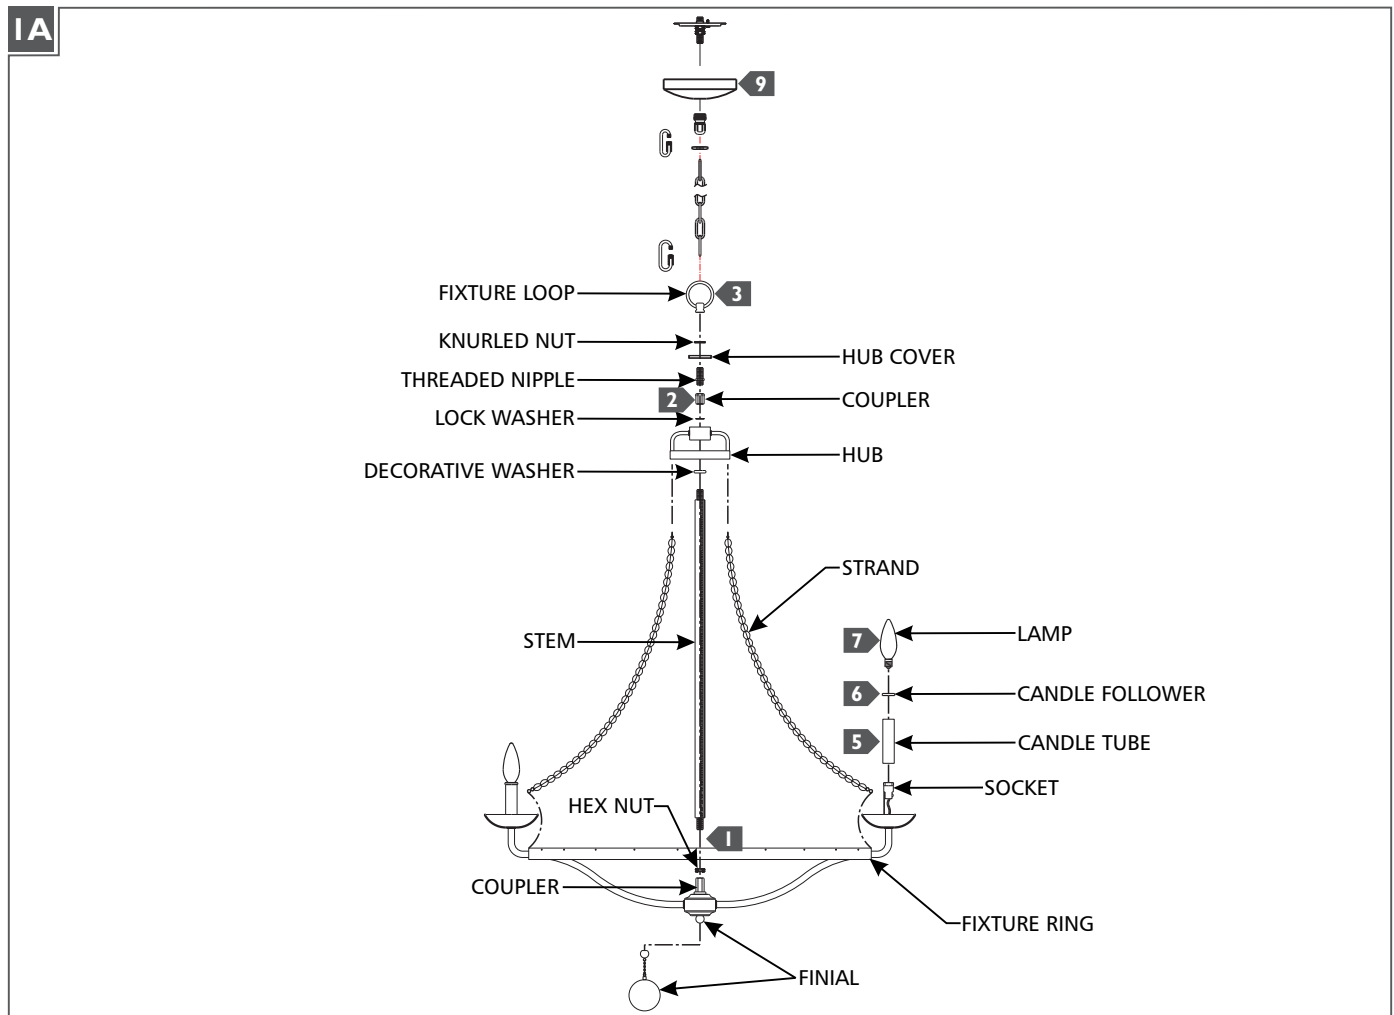

- 1** Feed the fixture wires through the hex nut, fixture, and stem, then insert the stem through the fixture ring and secure it with the hex nut. Screw the stem to the coupler.
- 2** Feed the fixture wires through the decorative washer, hub, lock washer, and coupler (in that order), then secure them in place by screwing the coupler to the stem.
- 3** Feed the fixture wires through the threaded nipple and screw it to the coupler, then feed the fixture wires through the hub cover, knurled nut, and fixture loop (in that order), then slide them down onto the nipple and secure them in place by screwing the knurled nut onto the nipple followed by fixture loop.
- 4** Install the strands by hooking them to the hub and fixture ring.
- 5** Install the candle tubes by slipping them over the sockets.
- 6** Install the candle followers to the top of the candle tubes.
- 7** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 8** Screw the desired finial to the bottom of the fixture.
- 9** Follow enclosed supplement installation instructions for electrical and fixture installation onto junction box.