

Bayfield 2, 3, and 4 Light Wall

4411602, 4411603, 4411604 | 1.2

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

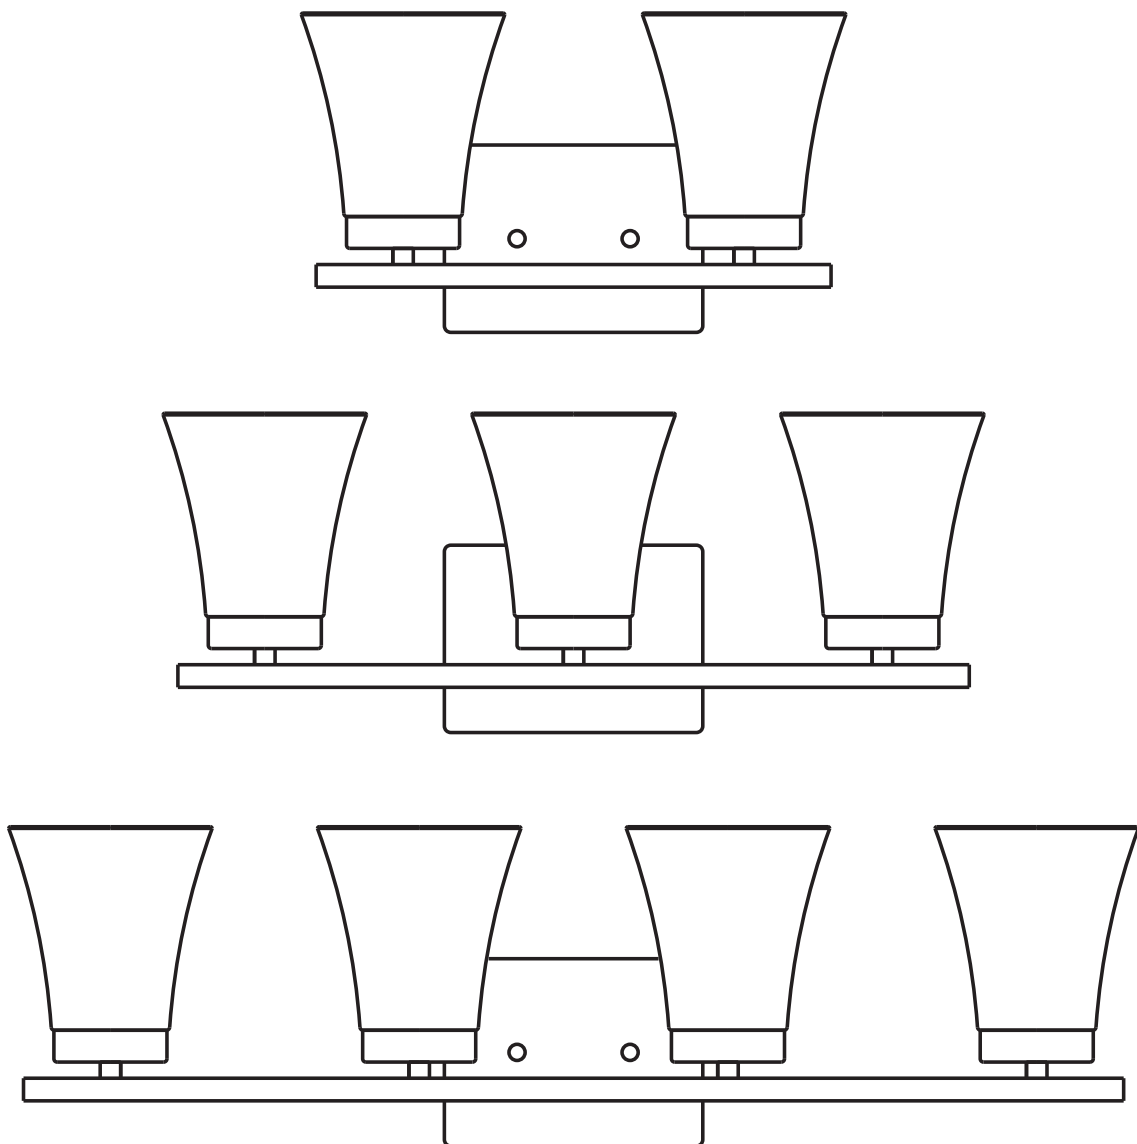

Install the Fixture

1A

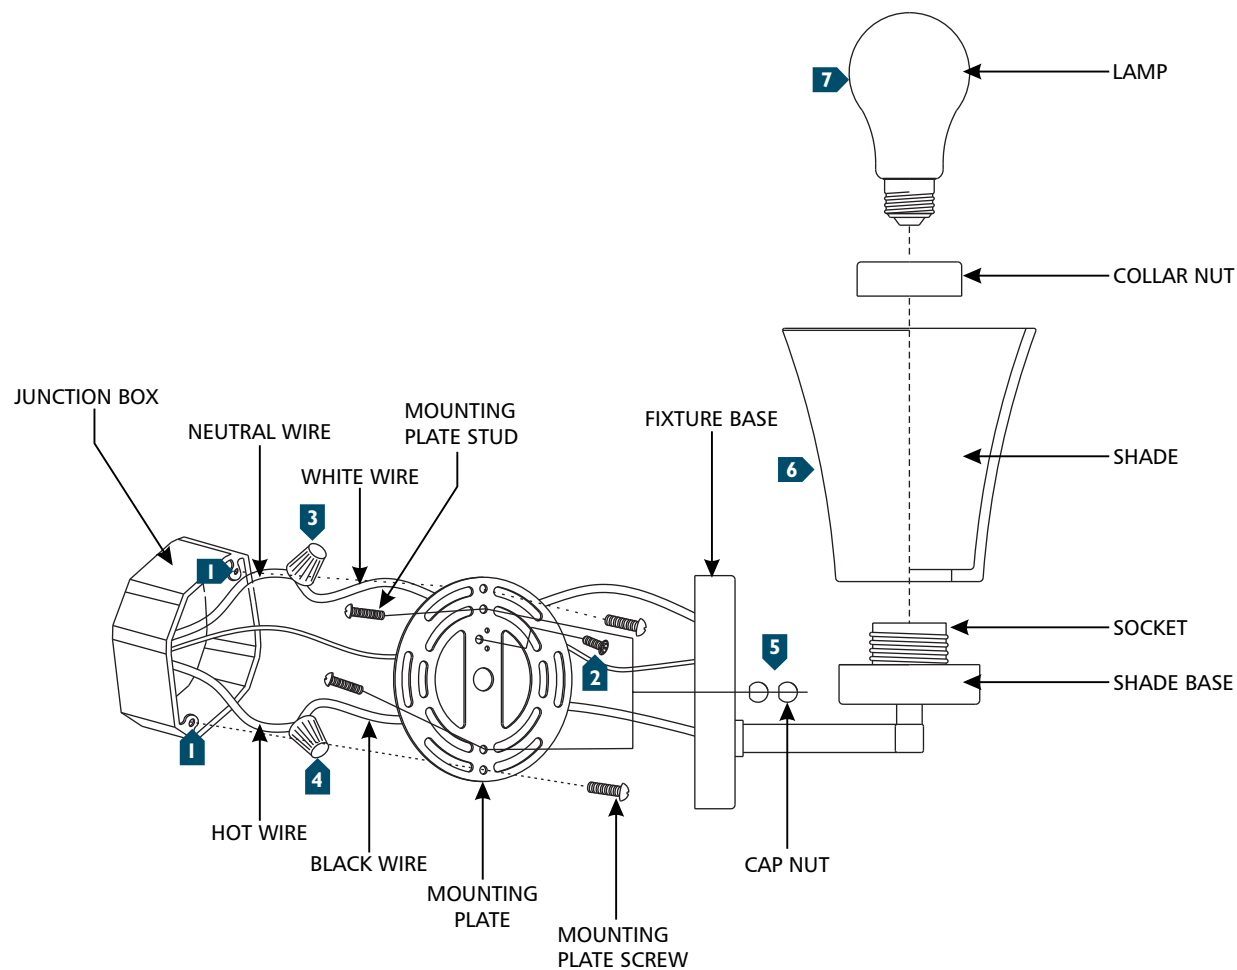

- 1** Secure the mounting plate to the electrical box.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Align then place the fixture base onto the mounting plate studs and secure it with two cap nuts.
- 6** Place the shade over the socket and onto the shade base, then secure it by screwing the collar nut onto the socket. Repeat for remaining shades.
- 7** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.