

TRAVERSE DIRECT

ROUND 6" DOWNLIGHT

The Traverse Direct is a sleek, low-profile LED Downlight designed for residential and commercial applications. Integrated, high-efficiency LEDs provide even, uniform illumination from edge to edge. This fixture provides a cost-effective solution for applications such as bathrooms, closets, hallways, and much more.

- 902 lumens delivered while only requiring 11-watts to power
- 90 CRI, 3000K
- J-Box mounted; fixture may be mounted to ceiling or wall
- Wet-rated and approved for use in closet spaces per NEC Article 410.16
- Dimmable down to 5%
- High-efficiency LEDs; 50,000 life hours

SPECIFICATIONS

DELIVERED LUMENS	902
WATTS	11
EFFICACY	82
CRI	90+
CCT	3000K
COLOR CONSISTENCY	3-step
INPUT VOLTAGE	120V
DIMMING¹	5%
CONSTRUCTION	Trim: Stamped aluminum Lens: Polycarbonate
FINISH	White
WIRING	6.5" wires
JUNCTION BOX COMPATIBILITY	3 in./4 in.: Round, Octagonal, Shallow (Pancake)
GENERAL LISTINGS	ETL Listed. Wet-rated (pre-installed gasket). Approved for use in closet spaces per NEC Article 410.16 ENERGY STAR® Qualified
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Complies with CEC 2022 Title 24 Part 6 (JA8-2016, JA8-2019, JA8-2022).
L70	50,000 hours min
WARRANTY²	5 years

¹See [visualcomfort.com](#) for dimmer compatibility.
²Visit [visualcomfort.com](#) for specific warranty limitations and details.



ORDERING INFORMATION

FIXTURE

PRODUCT	
14230S-15	TRAVERSE DIRECT, ROUND 6", WHITE
640230-97	POLYCARBONATE LENS, FROSTED (REPLACEMENT LENS)

SHIPPING INFORMATION

PACKAGE TYPE	PRODUCT	QTY	UPC	LENGTH	WIDTH	HEIGHT	CUBE	WEIGHT	FREIGHT CLASS	UPS SHIP
INDIVIDUAL	14230S-15	1	785652139475	7"	7"	1"	0.03	0.3 LBS		YES
MASTER PACK	14230S-15	20	10785652139472	16.7"	15"	9.5"	1.38	9.2 LBS		YES
PALLET	14230S-15	1680		48"	40"	67"	74.44	739 LBS	150	NO

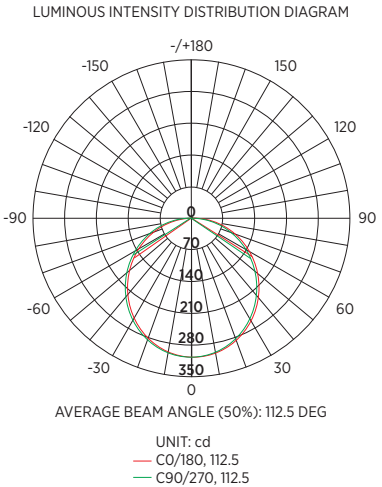

TRAVERSE DIRECT

ROUND 6" DOWNLIGHT

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES