

Hettinger 1, 2, 3, and 4 Light Wall

**4139101, 4439102,
4439103, 4439104** 1.0

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer.
LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

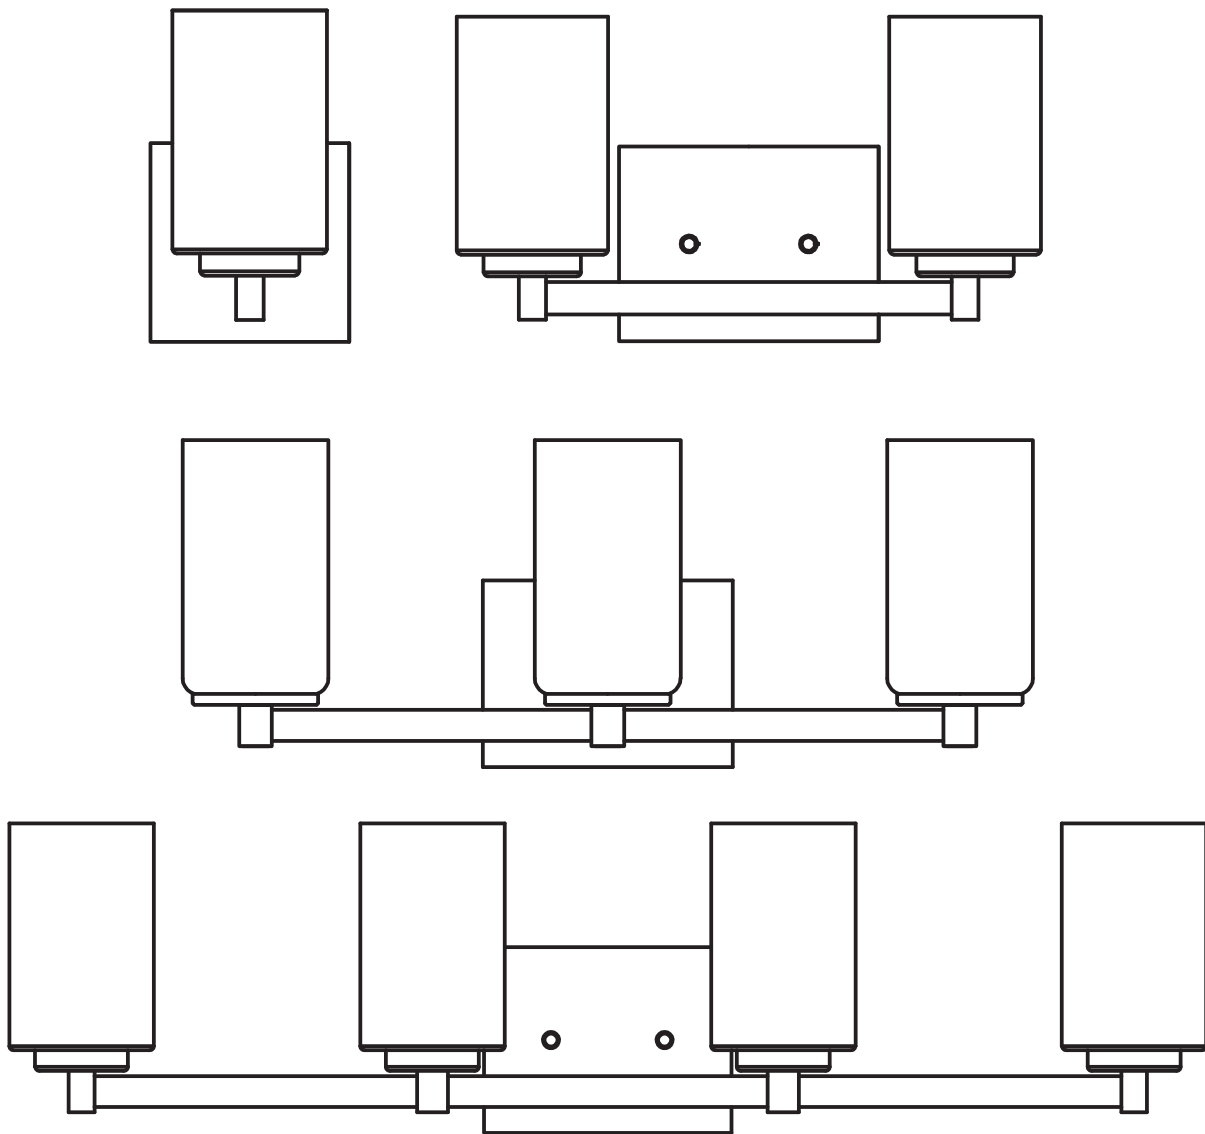

Install the Fixture

1A

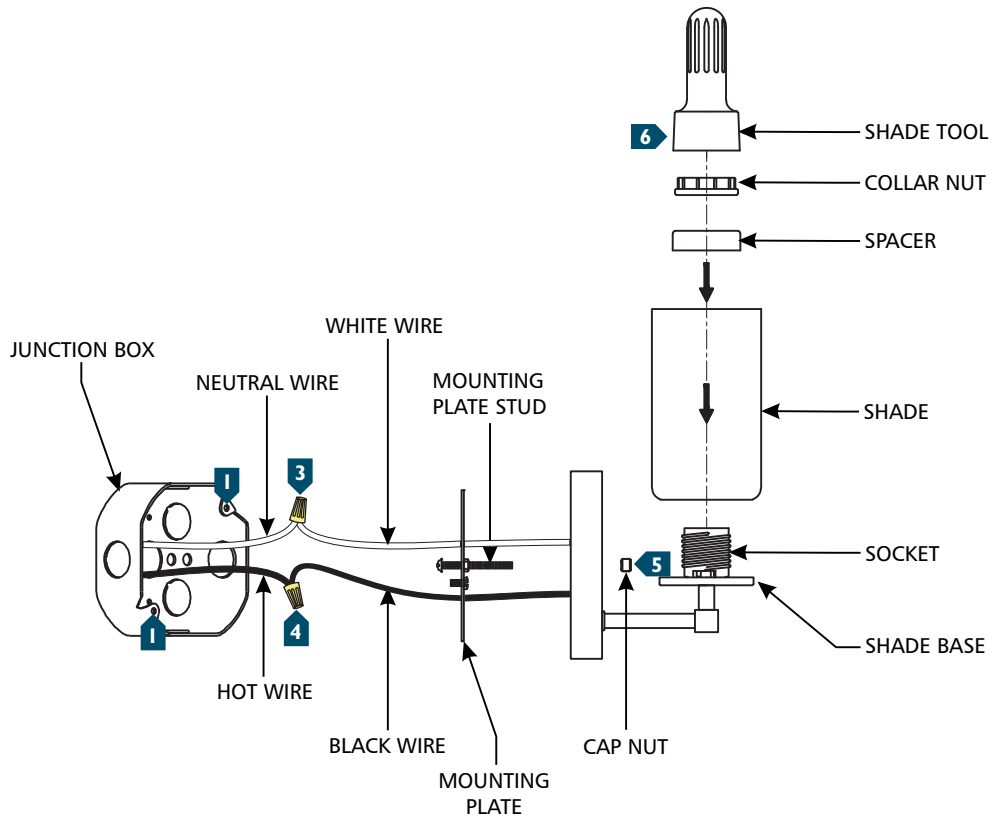

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Align, then place the fixture base onto the mounting plate stud (s) and secure it with the cap nut (s).
- 6** Place the shade and spacer over the socket and onto the shade base, then secure them in place by screwing the collar nut onto the socket using the shade tool. Repeat for remaining shades.
- 7** Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.